

# INSTALLATION INSTRUCTIONS


**AATB SERIES  
AAD-TB SERIES  
T-Bar Mounting**

These recessed, multi-head Adjustable Accent lights were designed to reduce ceiling clutter in retail spaces.


FOR SUPPLY CONNECTIONS ENTERING THIS FIXTURE USE WIRE SUITABLE FOR AT LEAST 90° C

**\* INSTALLATION TO BE DONE IN ACCORDANCE WITH NEC AND APPLICABLE CODES \***

1. For *most* installations, secure the fixture to T-Bar (typical as shown, or per local regulations).

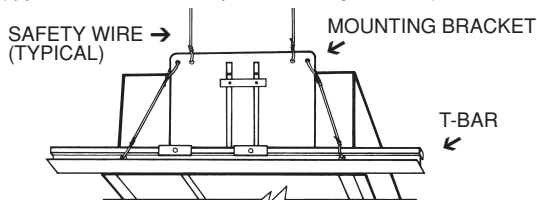


2. Mount fixture to sit on top of T-Bar. To correct height, adjust the mounting brackets with the screws inside the fixture.




## MR-16 Lamps: (AATB and AAD-TB)

3. Connect power through the knock-outs on the outside of fixture by transformer(s). After installation if you need access to the transformer, remove internal cover by removing nuts.

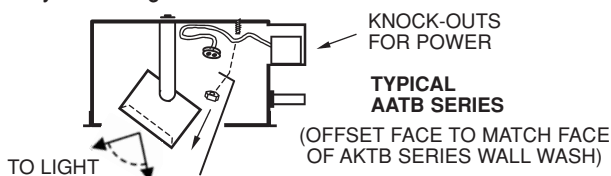


4. Connect the MR-16 lamp to the socket. Then secure the lamp by sliding it into the back of the lamp shroud and then squeeze lamp clip over lamp to secure.




## Halogen Par Lamps: (AATB and AAD-TB)

3. Connect power at the knock-out plate on the outside of fixture. For access to wiring after installation, remove the lamp shroud. Loosen two knurl nut on the outside of shroud and then remove. Internal cover is removed by removing nuts.

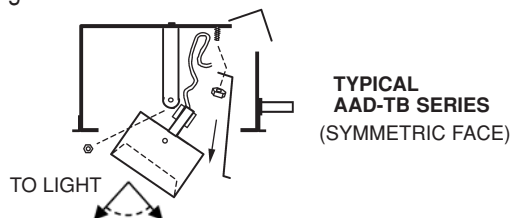


4. After completing the wiring, secure the knockout plate and screw the lamp into the socket. After all finish work is done, snap on the trim.



## Metal Halide Par Lamps: (AATB only)

3. Connect power at the knock-out plate on the outside of fixture. For access to ballast after installation, remove the lamp shroud. Loosen two knurl nut on the outside of shroud and then remove. Internal cover is removed by removing nuts.

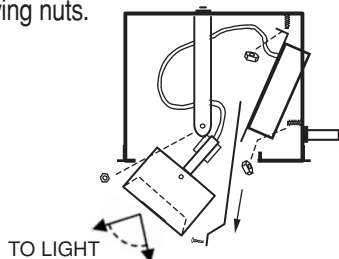

4. After completing the wiring, secure the knockout plate and screw the lamp into the socket.

