

INSTALLATION INSTRUCTIONS

AKDL Series
Recessed Indirect for Vertical
Illumination for Video Conferencing.
T-Bar


FOR SUPPLY CONNECTIONS
ENTERING THIS FIXTURE USE WIRE
SUITABLE FOR AT LEAST 90° C

*** INSTALLATION TO BE DONE IN ACCORDANCE WITH NEC AND APPLICABLE CODES ***


ALUMINUM REFLECTOR CLEANING: Clean reflector with soap and water or alcohol, i.e. isopropyl alcohol or other neutral PH factor solvents. Cleaning material should be non-abrasive. **DO NOT** use ammonia and alkali solutions.

REMOVE REFLECTOR & LED:

1. To remove the reflector, push in towards housing on the lamp side with your hand.




2. This will dislodge the opposite side of the reflector from the ledge. Then carefully pull the reflector out.

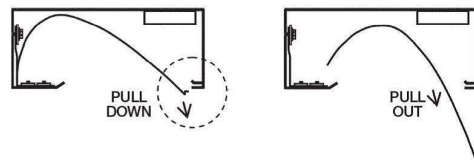

3. To remove LEDs – remove nut(s) & washer(s) securing the LED Bracket to the housing.



4. This will allow you to tilt the LED Bracket forward and remove. To replace the driver a "quick connect" to disconnect power is provided.



REPLACE REFLECTOR & LED:


1. To replace the LEDs, wire the new LEDs to driver then tilt the LED bracket back into the housing.




2. This will allow you to secure the LED bracket by securing the nut(s) & washer(s) to stud(s) in housing.




3. To replace the reflector, place the flat edge of the reflector at the back of the housing on the LED side.



4. Squeeze the reflector back into the housing by pushing on the LED side. Secure bent edge on housing ledge.

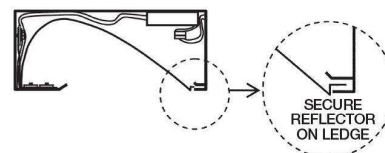

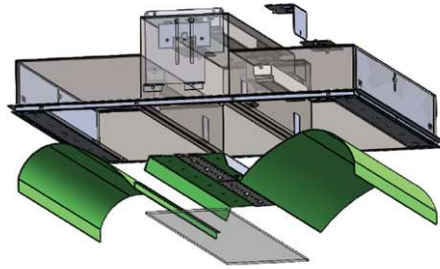

INSTALLATION INSTRUCTIONS

AKDL Series
Recessed Indirect for Vertical
Illumination for Video Conferencing.
T-Bar



FOR SUPPLY CONNECTIONS
ENTERING THIS FIXTURE USE WIRE
SUITABLE FOR AT LEAST 90° C

* INSTALLATION TO BE DONE IN ACCORDANCE WITH NEC AND APPLICABLE CODES *


This fixture includes three lighting sections. The center section (circled) holds the mounting bracket referred to in these instructions. Knockouts for wiring are located on each section. Reflector removal, (required for wiring) for the two side sections can be found on page 2.

2x2 19 lbs

2x4 30 lbs

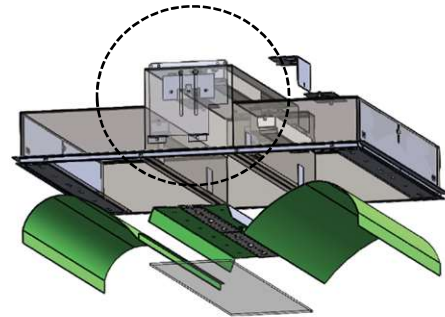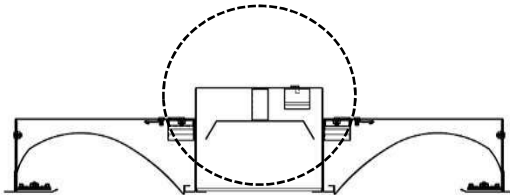


1. Remove the "Lift & Shift" lens that sits on the edge of the housing by tilting it up at an angle to maneuver it out of the face of the fixture.




2. Remove the Reflector by removing the screws, for access to the ballast or LED driver.

CAREFUL!! LED
Version has LEDs
attached to the
reflector!



RELEASE
REFLECTOR
WITH SCREWS

3. The flanges along the length of the fixture may either sit on the T-Bar or support a ceiling tile.



4. For most installations secure fixture to T-Bar (typical as shown). To correct fixture height, adjust the mounting brackets with the screws inside the fixture.

