


ELP

ENGINEERED LIGHTING
PRODUCTS

AWWS Series

Surface Mount Adjustable Wall Washer

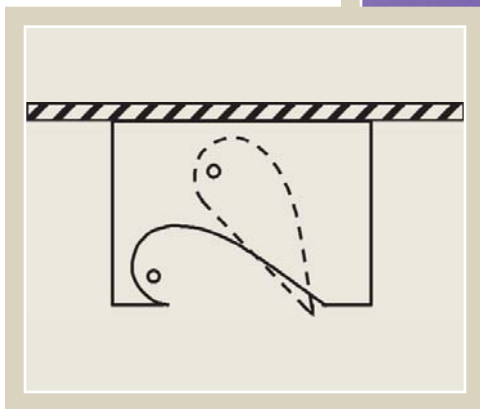

An adjustable (45° adjustability) wall wash luminaire that easily adjusts within the housing.

System

A high-performance adjustable wall wash luminaire that can be adjusted to give a sharp cut-off at the top of the surface that is to be illuminated, throwing light only where it is required. The reflector's design provides even, unscalped illumination.



TYPE:
 CATALOG #:
 JOB:

Specifications

Surface mounted, adjustable wall washer for use with Biax and T5 fluorescent lamps. The lighting component tilts up 45 degrees for light cutoff at the top of the surface to be illuminated. Reflector design provides even, unscalped illumination. The formed reflector combines white diffuse with high-purity aluminum (99.9%) with 95% reflectance.



The adjustable component of the fixture is extruded aluminum and is easily removable for access to the ballast. The 22-gauge housing is weld construction. The fixture is post painted with a TGIC polyester powder coating. All models are supplied standard with luminaire power disconnects.

Continuous Mount – If the fixtures are being mounted in a continuous row add “CC” to the catalog number and provide row configuration, i.e.: (18) 154T-5AWWS-CC for (6) 12’ rows.

UL/CUL Damp Location Listed.

Options

- Ballast 120 or 277 HPF Electronic (Standard)
 Dimming (Specify Type) -DM
 Emergency (NOT Available)
- Finish White (Standard)
 Custom -Custom
- Reflector Combo White/Diffuse Silver (Standard)
 White -W
- Lens Clear Lexan Mini Lens -ML
 Frosted Lexan Mini Lens -MLF
- Louver Diffuse Silver Parallel Blade -LV
- Mounting Surface J-Box (Standard)
 Canopy w/Stem – CS (Ft of Stem)
 Ex. 154T-5AWWS-CS4
 Continuous Row (see above) -CC

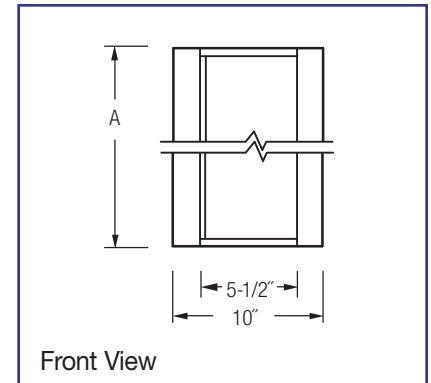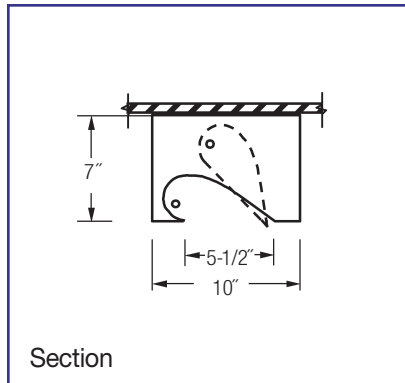

Model	A	Lamp
155BXAWWS	23-11/16"	(1) 55 watt Biax
124T-5AWWS	23-11/16"	(1) 24 watt T-5 HO
224T-5AWWS	23-11/16"	(2) 24 watt T-5 HO
255BXAWWS	47-11/16"	(2) 55 watt Biax
154T-5AWWS	47-11/16"	(1) 54 watt T-5 HO
254T-5AWWS	47-11/16"	(2) 54 watt T-5 HO

NOTE: Standard T-5 lamps are available for:
 2’ fixture, change “24” to “14” or 4’ fixture,
 change “54” to “28.”