

**ELP**


ENGINEERED LIGHTING  
PRODUCTS

## AWW & AWWTB SERIES

Recessed Adjustable Wall Wash Fixtures  
For Drywall & T-Bar Lay-in



**T-Bar Fixture**

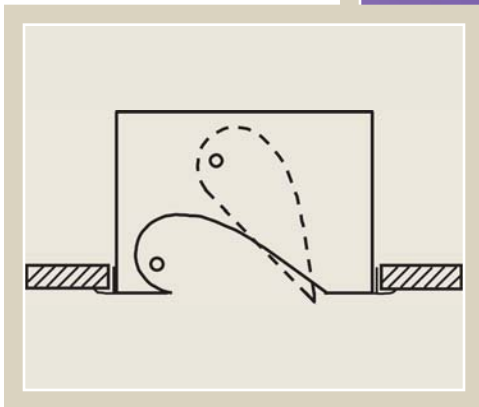

*An adjustable (45° adjustability)  
wall wash luminaire that easily  
adjusts from below without  
breaking the ceiling plane.*

### **System**

A high-performance adjustable recessed wall wash luminaire that can be adjusted to give a sharp cut-off at the top of the surface that is to be illuminated. This is accomplished without the housing breaking the ceiling plane. The reflector's design provides even, unscalped illumination.



TYPE:  
CATALOG:  
JOB:

# AWW & AWWTB SERIES

Recessed Adjustable Wall Wash  
for Drywall and T-Bar Lay-in

## Specifications

Adjustable recessed wall wash for use with Biax and T5 fluorescent lamps for T-Bar or drywall installations. The lighting component tilts up 45 degrees for light cutoff at the top of the surface to be illuminated without breaking the ceiling plane. Reflector design provides even, unscaloped illumination. The formed reflector combines white diffuse with high-purity aluminum (99.9%) with 95% reflectance.

The adjustable component of the fixture is extruded aluminum and is easily removable for access to the ballast. The 22-gauge housing is weld construction. The fixture is post painted with a TGIC polyester powder coating. All models are supplied standard with luminaire power disconnects.



**Continuous Mount** – If the drywall fixtures are being mounted in a continuous row add “CC” to the catalog number and provide row configuration, so proper trims may be provided, i.e.: (18) 154T-5AWW-CC for (6) 12’ rows.

Rough-In Dimensions = (Entire length of row, add all “A” lengths + 1/2” x 10-5/8”

UL/CUL Damp Location Listed.



## Options

- Ballast 120 or 277 Electronic (Standard)  
Dimming (Specify Type) –DM  
Emergency (NOT Available)
- Finish White (Standard)  
Custom –Custom
- Reflector Combo White/Diffuse (Standard)  
White –W
- Lens Clear Lexan Mini Lens –ML  
Frosted Lexan Mini Lens –MLF
- Louver Diffuse Silver Parallel Blade –LV

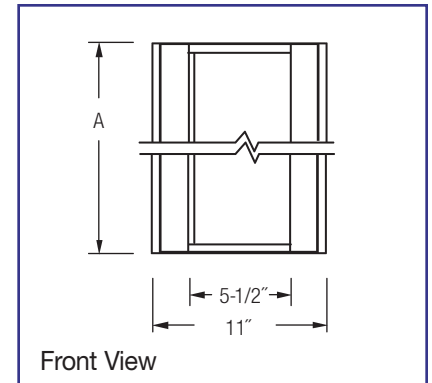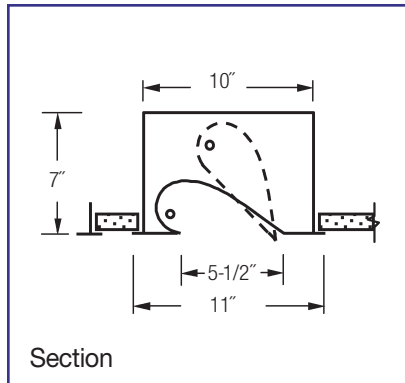

## AWWTB SERIES for T-Bar Installations

| Model No.    | A         | Lamp               |
|--------------|-----------|--------------------|
| 155BXAWW-TB  | 23-11/16" | (1) 55 watt Biax   |
| 124T-5AWW-TB | 23-11/16" | (1) 24 watt T-5 HO |
| 224T-5AWW-TB | 23-11/16" | (2) 24 watt T-5 HO |
| 255BXAWW-TB  | 47-11/16" | (2) 55 watt Biax   |
| 154T-5AWW-TB | 47-11/16" | (1) 54 watt T-5 HO |
| 254T-5AWW-TB | 47-11/16" | (2) 54 watt T-5 HO |

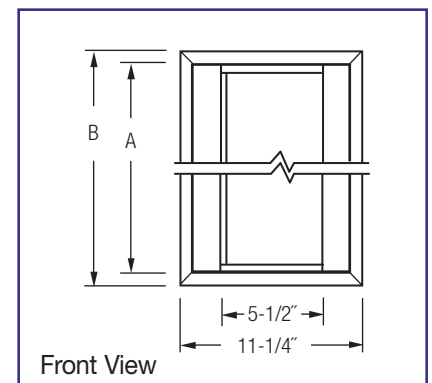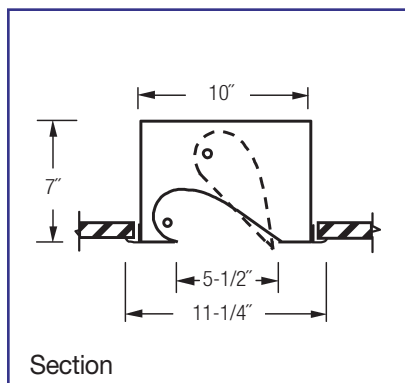

## AWW SERIES for Plaster or Drywall

| Model No. | A         | B         | Lamp               |
|-----------|-----------|-----------|--------------------|
| 155BXAWW  | 23-11/16" | 24-15/16" | (1) 55 watt Biax   |
| 124T-5AWW | 23-11/16" | 24-15/16" | (1) 24 watt T-5 HO |
| 224T-5AWW | 23-11/16" | 24-15/16" | (2) 24 watt T-5 HO |
| 255BXAWW  | 47-11/16" | 48-15/16" | (2) 55 watt Biax   |
| 154T-5AWW | 47-11/16" | 48-15/16" | (1) 54 watt T-5 HO |
| 254T-5AWW | 47-11/16" | 48-15/16" | (2) 54 watt T-5 HO |

**NOTES:** Standard T-5 lamps are available for:  
2’ fixture, change “24” to “14” or 4’ fixture,  
change “54” to “28.”