

INSTALLATION INSTRUCTIONS

**IDTB SERIES
for T-Bar Mounting**


This is the ideal fixture for computer environments where low reflector brightness is essential.

FOR SUPPLY CONNECTIONS ENTERING THIS FIXTURE WITHIN 3 INCHES OF A BALLAST USE WIRE SUITABLE FOR AT LEAST 90° C


*** INSTALLATION TO BE DONE IN ACCORDANCE WITH *NEC* AND APPLICABLE CODES ***

ALUMINUM REFLECTOR CLEANING: Clean reflector with soap & water or alcohol, i.e. Isopropyl Alcohol or other neutral PH factor solvents. Cleaning material should be non-abrasive. **DO NOT** use Ammonia & alkali solutions.


1. To remove the reflector, push in towards housing from either edge of the bottom of the reflector.

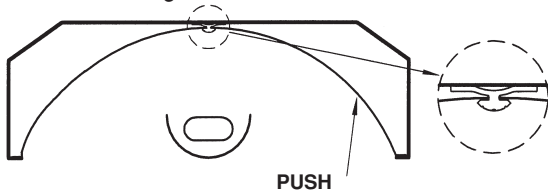


2. This will dislodge the reflector edge and reveal a notch for your finger or screwdriver tip.

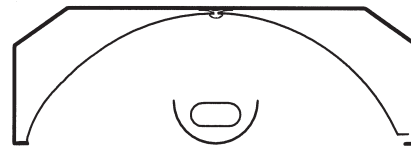


3. Carefully use your finger or screwdriver tip to pull the reflector past the lip on the fixture.

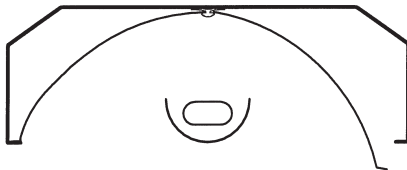


4. Pull the reflector out, avoiding the lamp shield.

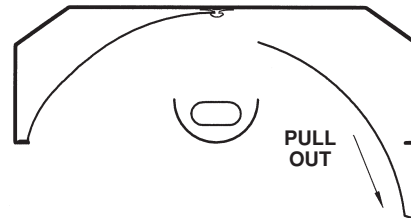


5. For most installations secure the fixture to T-Bar (typical as shown, or per your local regulations).

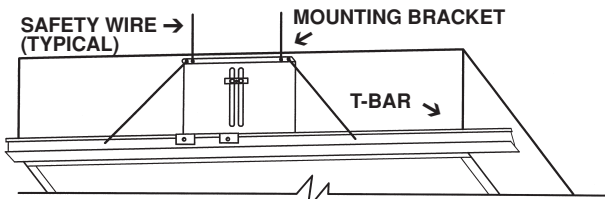

6. The fixture should be adjusted to sit just on top of the T-Bar as shown. **To correct fixture height, adjust the mounting brackets with the screws inside the fixture.**

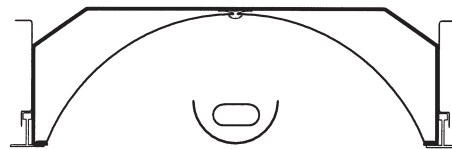

7. Make electrical connections and carefully replace the reflector to rest on both ledges.

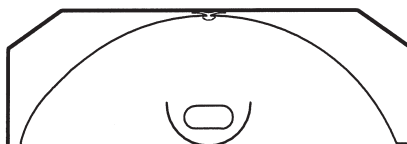

8. **Lamp the fixture** by angling the lamp into the socket, then snapping the lamp into lamp holder. (It can be a tight fit depending on the lamp used.) **You may need to push the reflector up slightly to lamp the 1' wide fixtures.**

