


CL & CLLP



CLM

# INSTALLATION INSTRUCTIONS

CL SERIES  
CLLP SERIES  
CLM SERIES

Surface Mount Cove Lights


The CL Series fixtures may be spread apart 2" to 3" from the next fixture in line and still have no socket shadows. The CLLP & CLM Series should be placed end to end to minimize socket shadows.

FOR SUPPLY CONNECTIONS ENTERING THIS FIXTURE USE WIRE SUITABLE FOR AT LEAST 900 C.

**\* INSTALLATION TO BE DONE IN ACCORDANCE WITH NEC AND APPLICABLE CODES \***


## CL & CLLP Series:

1. To remove the reflector, push in towards housing on the lamp side with your hand.




← BACK WALL OF COVE                      OPEN TO ROOM →

2. This will dislodge the opposite side of the reflector from the (A) ledge.




3. Pull the reflector out and you have access to the ballast.




## CLM Series:

1. To remove the reflector, push the lip of the reflector opposite the lamp with your thumb, towards the lamp side of the fixture.




← BACK WALL OF COVE                      OPEN TO ROOM →


2. This will dislodge the reflector from the (A) ledge of the fixture.



3. Pull the reflector out and you have access to the ballast or LED driver.




**CAREFUL!**  
LED version has the LEDs attached to reflector!




**Secure the fixture in the cove and make all wire connections.**

**REPLACING THE REFLECTOR SHOULD BE THE LAST STEP AFTER PAINTING AND FINISH WORK FOR FLUORESCENT FIXTURES. LED REFLECTORS MUST BE PROTECTED DURING FINISH WORK.**


4. Place the lamp side of reflector on (B) ledge and squeeze the reflector back into the housing.




5. Push the reflector into (A) ledge, then lamp the fixture.



4. Place the lamp side of reflector on (B) ledge and squeeze the reflector back into the housing.




5. Make sure that the reflector is seated properly on (A) ledge, then lamp the fixture (if fluorescent).



## LED Lamping & Reflector Replacement ONLY for CL & CLLP Series

### REMOVE REFLECTOR & LED:


1. To remove the reflector, push in towards housing on the lamp side with your hand.

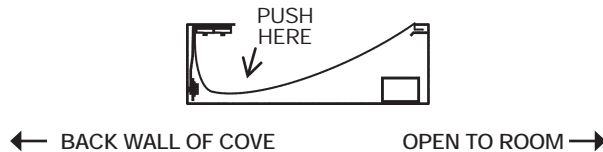


2. This will dislodge the opposite side of the reflector from the ledge. Then carefully pull the reflector out.



3. To remove the LEDs, remove nut(s) & washer(s) securing the LED Bracket into the housing.




4. This will allow you to tilt the LED Bracket forward and remove. To replace the driver a "quick connect" to disconnect power is provided.

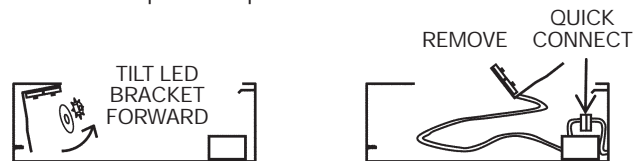


### REPLACE REFLECTOR & LED:


1. To replace the LEDs, wire the new LEDs to driver then tilt the LED Bracket back into the housing.




2. This will allow you to secure the LED Bracket by securing the nut(s) & washer(s) to stud(s) in housing.



3. To replace the Reflector, place the flat edge of the Reflector at the back of the housing on the LED side.



4. Squeeze the Reflector back into the housing by pushing on the LED side. Secure bent edge on housing ledge.

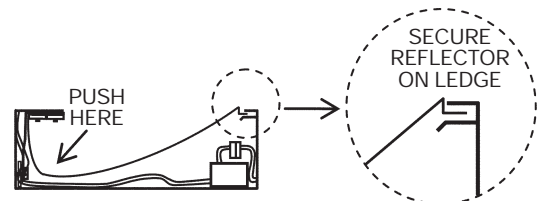

**ALL OTHER INSTALLATION INSTRUCTIONS APPLY. THIS SHEET SIMPLY CLARIFIES  
LED RELAMPING AND REFLECTOR REPLACEMENT**