

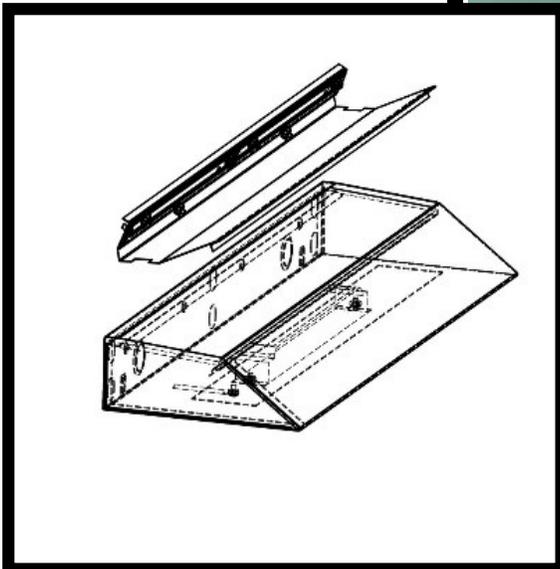


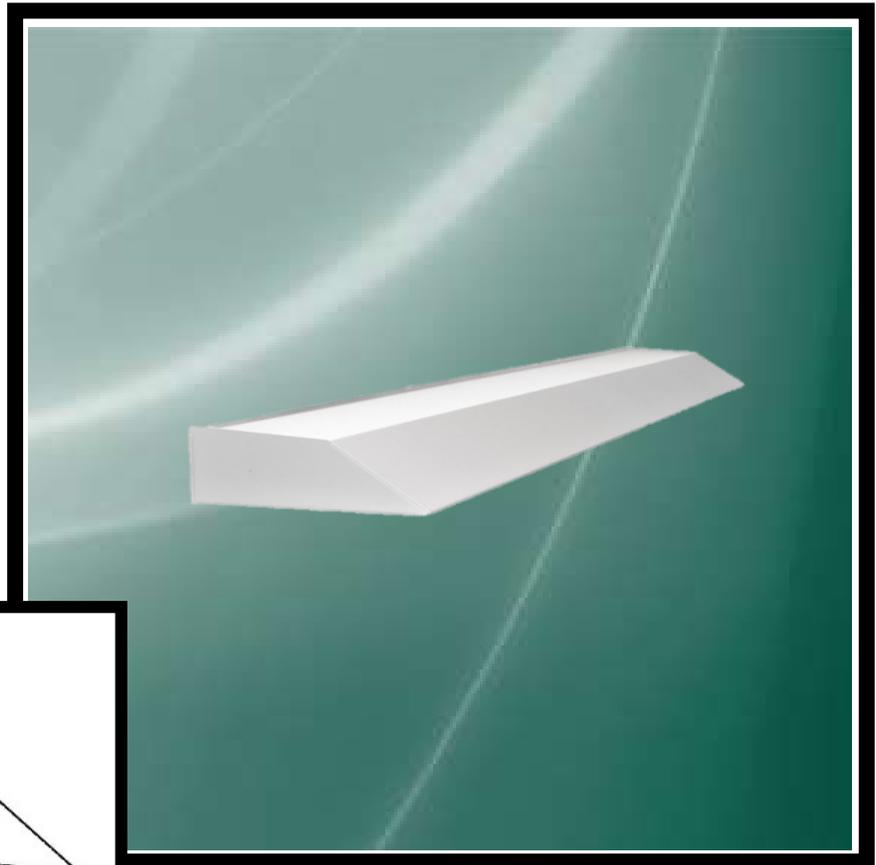

## CLK LED SERIES

### SURFACE Mount Knife Edge Cove

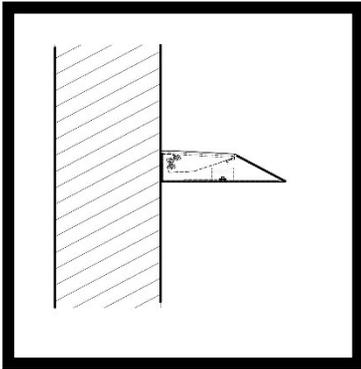

Sleek Knife Edge surface mount  
cove.

#### System

Shallow profile cove fixture to be mounted directly to walls. Superior reflector optics minimize shadows and projects light into the space out-performing typical "strip light" and LED tapes.



# CLK LED SERIES

ELP

TYPE:  
CATALOG#

## SURFACE Mount Knife Edge Cove

### Specifications

Surface, Wall mounted LED cove light. Knife edge profile. 22 gauge CRS, post painted textured matte white TGIC powder coat finish. Dimming is standard. 80+ CRI, rated greater than 60,000 hours. Integral mounted dimming driver. One piece, formed reflector, powder coated in high reflectance matte white and removable with out tools for wiring and driver access. The reflector design provides soft, back wall illumination, while projecting volumes of useful light into the space.

The clean, textured finished housing has no visible openings. It is provided with knockouts at the back or on end(s) when multiple fixtures are mounted in continuous row for through wiring.

c/CSA/us Damp Location Listed  
U.S. Patent #9,726,337  
5 year warranty

### Standard Features

Driver 120/277 0-10 volt. Osram True 1% dimming.  
Finish Textured Matte White

### Options

- Driver 3-wire/Digital, Lutron ECO Systems L3D 1% **-DM6**  
2-wire, Lutron LTE 1% (120v only) **-DM7**  
Digital, Lutron LDE 1% **-DM8**  
(Lutron LDE features include *Soft-On, Fade to Black and Guaranteed 1% dimming*)  
**0-10v Programmable Options:**  
End of Life Indicator **-EOL**  
Soft Start **-SFT**  
Dim to Off **-DTO**
- Output Custom Lower Lumen output. Factory programmed. **-LL\*\*\***
- Finish Anti-Microbial White **-MB**  
Custom color **-CUSTOM**
- Wireless Osram Connected Lighting Module **-WLMS**
- LED **Must Specify\***  
2700K (90+ CRI) **-27K**  
3000K **-30K**  
3500K **-35K**  
4000K **-40K**  
5000K **-50K**
- Lens Clear Acrylic **-FL**  
Frosted Acrylic **-FLF**
- Continuous Multiple units in continuous row [please provide qty(s) and length of row(s)] **-CW**
- Emergency Emergency Back-up 11w. **-EPP**

\*\*\*consult factory



### Sample Part Number:

**(3)444W1CLK-MB-35K-FL-CW**

For (1) 12' row


Description:

48" surface wall mount cove. Knife edge. Standard Dimming.. Anti-microbial finish. 3500K. Clear Full Lens. Continuous row.

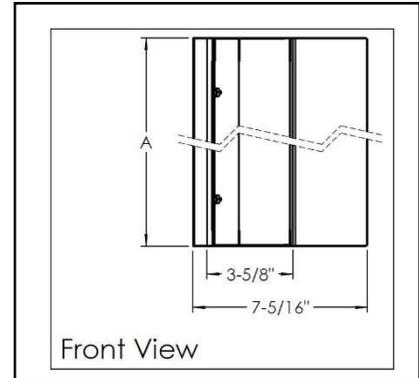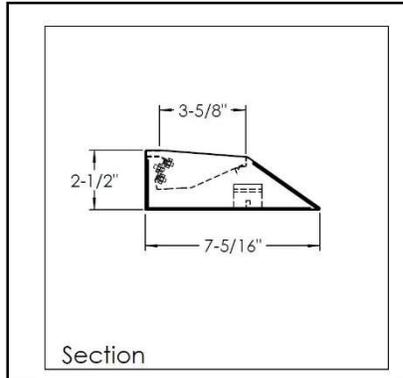

Model No.	A	Lamp	Fixture Lumens
222W1CLK-(*K)	24"	(2) 10.8w LEDs	2578
333W1CLK-(*K)	36"	(3) 10.8w LEDs	3868
444W1CLK-(*K)	48"	(4) 10.8w LEDs	5157
888W1CLK-(*K)	96"	(8) 10.8w LEDs	10314

### Light Levels at the 30" Workplane

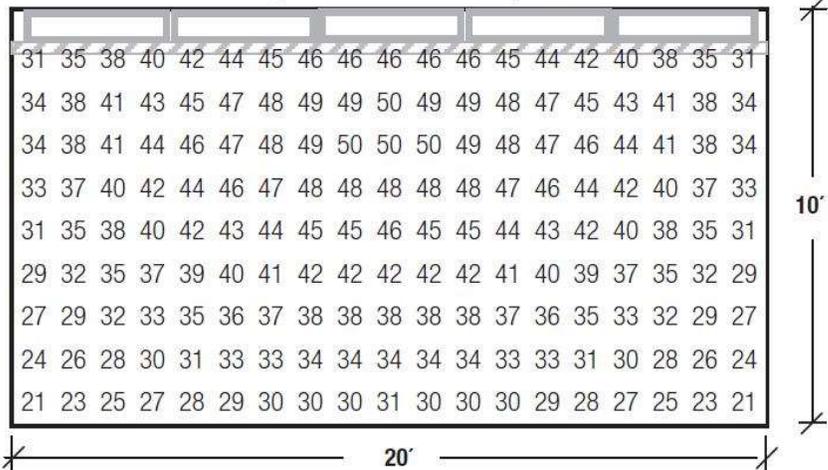

IES File #444W1CLM-35 - Maintained Light Levels / Reflectance at .80 .50 .20

10' ceiling height. Mounted 8' AFF

