

ELP


ENGINEERED LIGHTING
PRODUCTS

Project
Maines Residence
Santa Clarita, California

Specifier
Lauri Maines, LC
El Monte, California


Photographer
Mark Dell'Aquila
Long Beach, California

Lighting
132T-8CLM, 32 watts
Cove Light

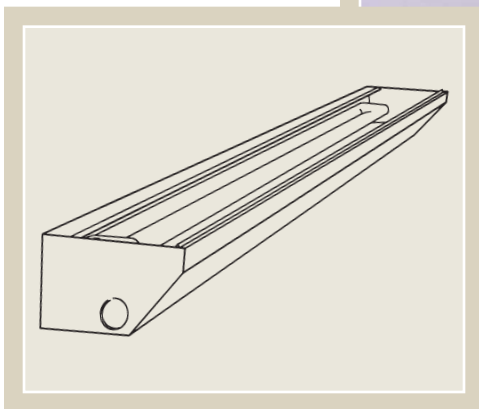

CLM SERIES

SURFACE Mount Mini Cove Light

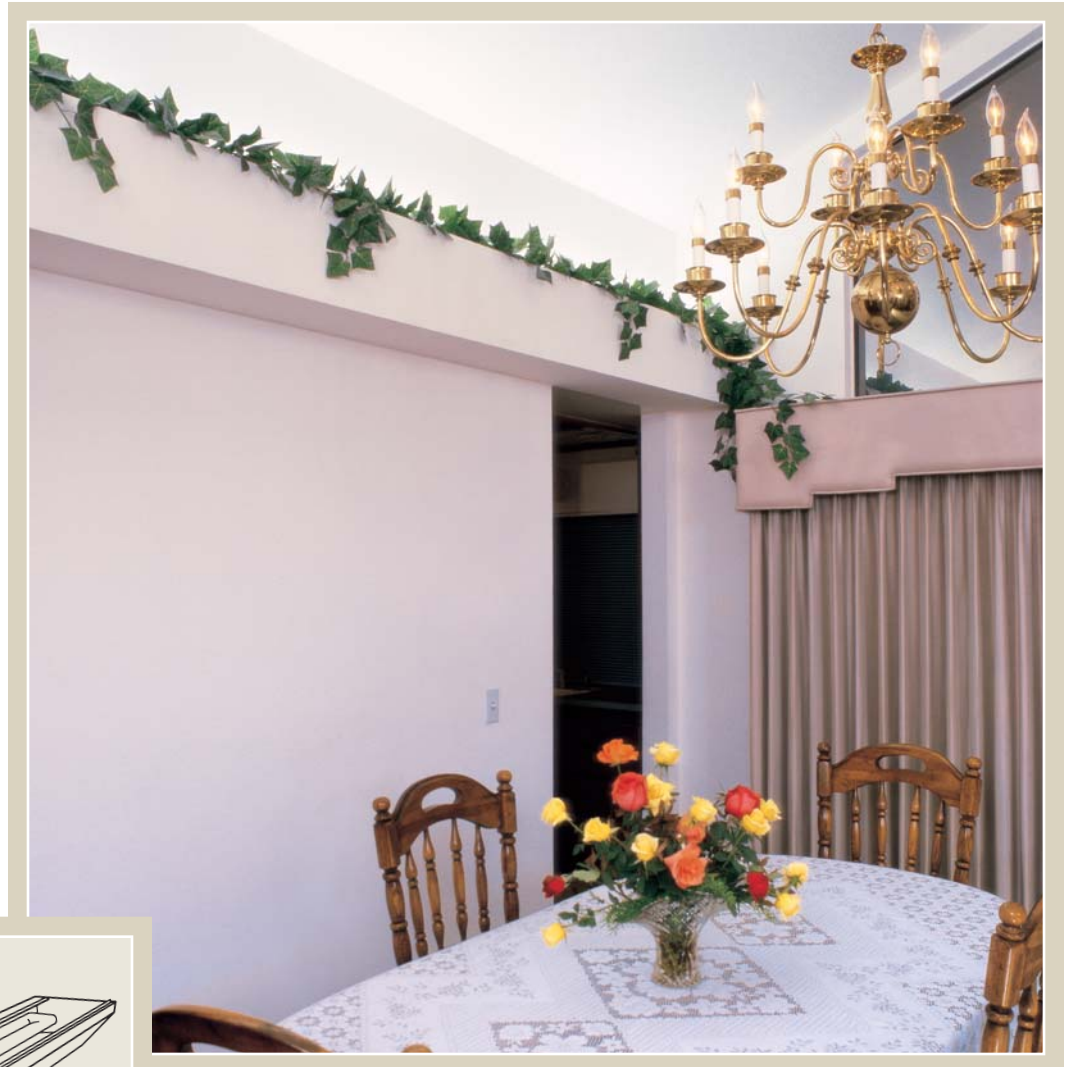

Ideal mini cove light for a narrow or pre-fabricated cove.

System

Mini cove fixture is made to lay directly into your narrow or pre-fabricated cove shelf. Reflector design illuminates the cove and minimizes socket shadows. By projecting light out of the cove and into the space, they provide far superior performance than a typical "strip-light."

Specifications

Mini surface mounted fluorescent cove light for use with Biax, T-5 and T-8 lamps. The fixture is 2-3/4" deep with ballast mounted in the housing. The one piece, formed reflector is TGIC polyester powder coated in matte white and is easily removable without tools for access to ballast and wiring. White reflector design illuminates the cove and minimizes unsightly socket shadows while projecting light out of the cove and into the space.



TGIC polyester powder coated housing is made of 22 gauge CRS with knock-outs provided at the end of fixture to allow for through wiring. All fluorescent fixtures are supplied standard with Luminaire Disconnect. Surface wall mount unit with clean, textured finish has knock-outs on the back and may be ordered by adding "SW" to the catalog number.

UL/CUL Damp Location listed.

U.S. Patent #5,142,459

Options

Ballast	120 or 277 Electronic (Standard) Dimming (Some models) -DM Emergency (Some models) -EPP
Finish	White (Standard) Anti-Microbial White -MB Custom (For Wall Mount) -Custom
Mounting	Surface Mount in Cove (Standard) Surface Mount on Wall -SW
Lens	Clear Lexan Full Lens -FL Frosted Lexan Full Lens -FLF

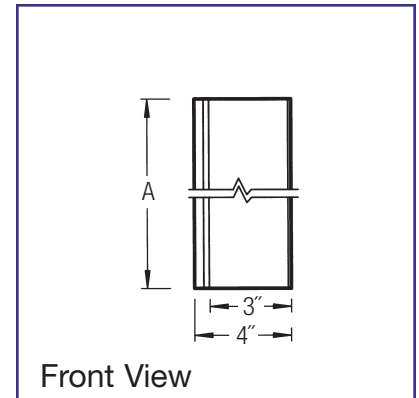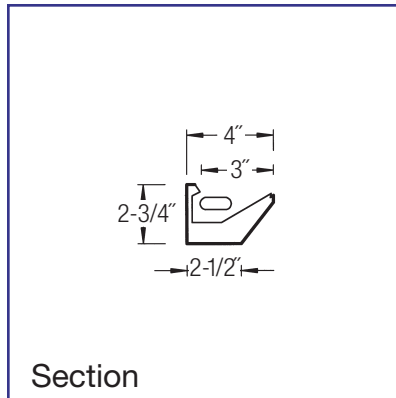

Model No.	A	Lamp
118 BXCLM	12"	18 watt Biax
140 BXCLM	24"	40 watt Biax
150 BXCLM	24"	50 watt Biax
155 BXCLM	24"	55 watt Biax
240 BXCLM	48"	(2) 40 watt Biax
250 BXCLM	48"	(2) 50 watt Biax
255 BXCLM	48"	(2) 55 watt Biax
114 T-5CLM	22-1/2"	14 watt T-5
124 T-5CLM	22-1/2"	24 watt T-5 HO
121 T-5CLM	34-5/16"	21 watt T-5
139 T-5CLM	34-5/16"	39 watt T-5 HO
128 T-5CLM	46-1/8"	28 watt T-5
154 T-5CLM	46-1/8"	54 watt T-5 HO
117 T-8CLM	24"	17 watt T-8
125 T-8CLM	36"	25 watt T-8
132 T-8CLM	48"	32 watt T-8

