
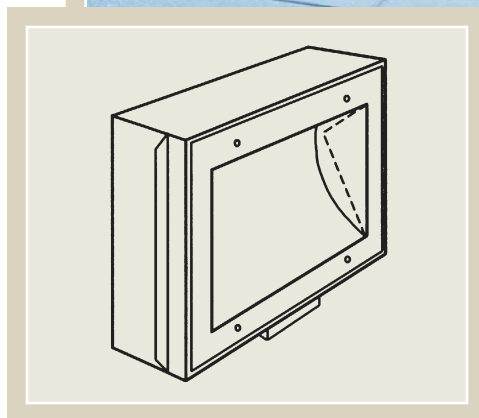
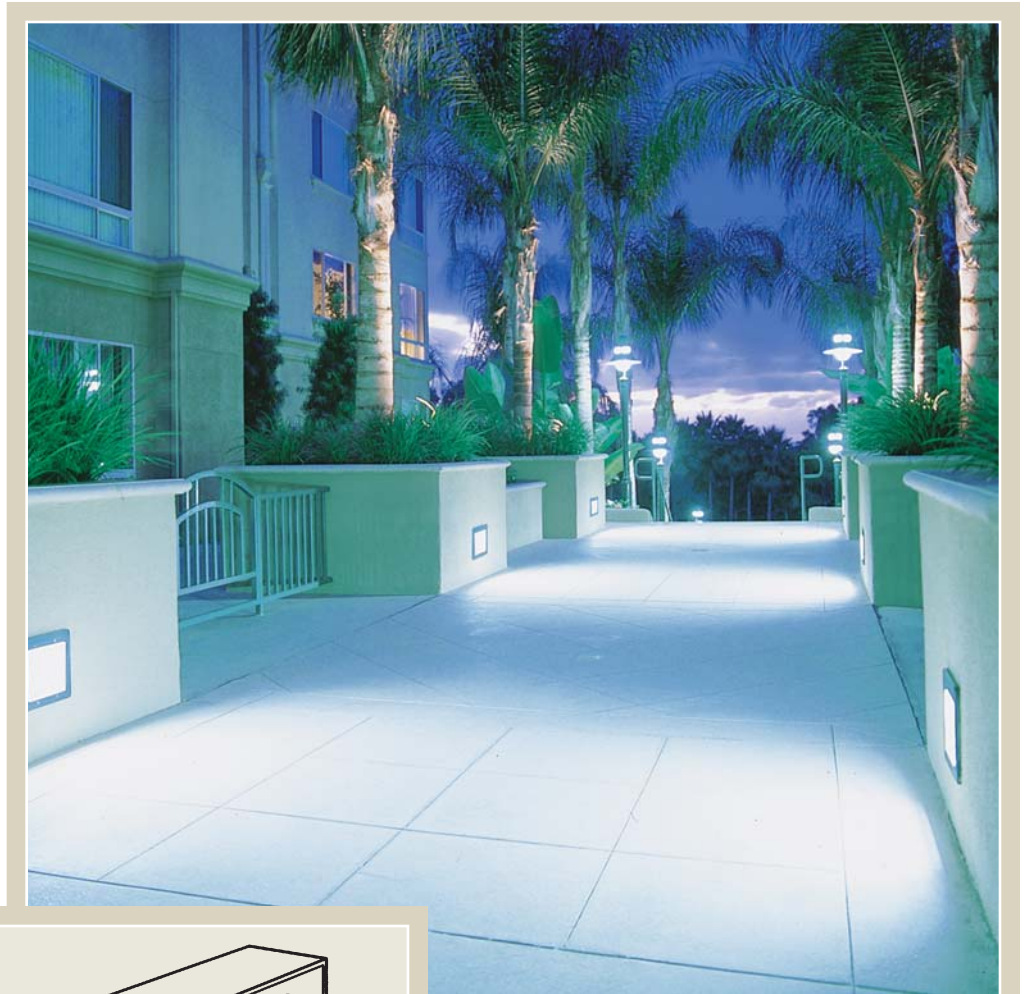



CP SERIES

ELP

ENGINEERED LIGHTING
PRODUCTS

RECESSED Exterior or Concrete Pour
Low Level Floodlight



Project
The Colony
Newport Beach, California

Specifier
LDB Inc.
Tustin, California

Photographer
Mark Dell'Aquila
Long Beach, California

Lighting
126QDCP, 26 watts

*Ideal placement is
18" to 36" from the
bottom edge of fixture
to the ground.*

System

Wet Location low level floodlights. Shallow recess depth (4") allows easy incorporation into exterior walls. Their unique Regress Lens design is very low brightness. Fluorescent lamps combined with the high purity aluminum reflector system provides high light levels with low energy.



TYPE:
 CATALOG #:
 JOB:

**RECESSED Exterior or Concrete Pour
 Low Level Floodlight**

Specifications

Recessed wet location low level floodlight for one or two compact fluorescent or T-8 lamps. Fixture recess is 4" deep. The one piece, formed reflector is high purity aluminum (99.9%) with 95% reflectance. Combined with fluorescent lamps, the reflector system provides high light levels with low energy.

Housing is made of 18 gauge electro-plated galvanized steel, which is TGIC polyester powder coated and suitable for recessed exterior or concrete pour. Formed aluminum face plate attaches with screws and recesses in the housing to mount flush with the finish surface. The face plate has a gasketed 3/16" acrylic regressed lens in most models. The regressed lens design provides very low brightness. Attached J-box suitable for through wiring. All fluorescent fixtures are supplied standard with Luminaire Disconnect.

UL/CUL Wet Location and concrete pour listed.



U.S. Patent #5,142,459

Options

- Ballast Low Temp 120 or 277 HPF
Electronic (Standard)
- Finish Black (Standard)
- Frame Bronze -BZ
Custom -Custom
- Fixture Electro-Plated Galvanized Steel
(Standard)
Stainless Steel -SS
- Lens Supplied Standard as shown
 ① Regressed Acrylic (Some Models)
 ② Regressed Polycarbonate -LEX (Some Models)
 ③ Flat Acrylic -FL (Some Models)
 ④ Flat Polycarbonate -FL-LEX (Available All Models)
 ⑤ Flat Tempered Glass -TGL (Available All Models)
- Reflector Diffuse Silver (Standard)
Stepped Diffuse Silver -ST

Note: CP Series fixtures project less than 2% of fixture lumens higher than 90 degrees from nadir (straight down) and in Zones LZ2 thru LZ4 can contribute to:

**LEED Sustainable Site Credit 8:
 Light Pollution Reduction - 1 point**

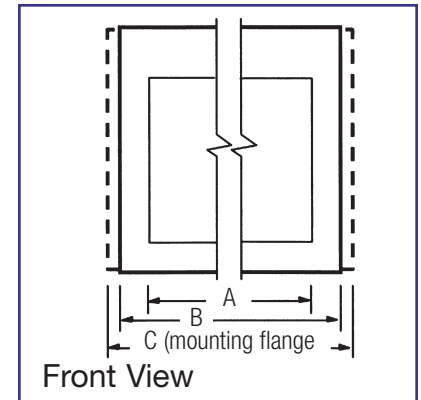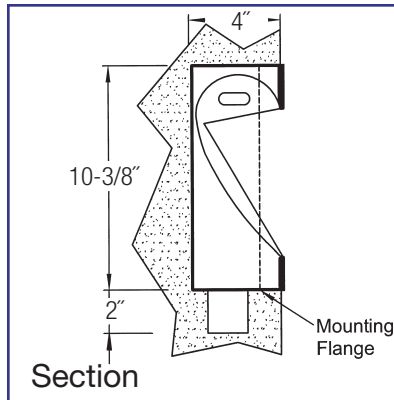

Model No.	A	B	C	Standard Lens	Lamp
113PLCP	7-7/8"	10-3/4"	11-3/4"	①	13 watt PL
213PLCP	15-7/8"	19"	20"	①	(2) 13 watt PL
118QDCP	7-7/8"	10-3/4"	11-3/4"	①	18 watt Quad
126QDCP-LEX	7-7/8"	10-3/4"	11-3/4"	②	26 watt Quad
126TTCP-LEX	7-7/8"	10-3/4"	11-3/4"	②	26 watt Triple Tube
132TTCP-LEX	7-7/8"	10-3/4"	11-3/4"	②	32 watt Triple Tube
142TTCP-FL-LEX	7-7/8"	10-3/4"	11-3/4"	④	42 watt Triple Tube
226QDCP-LEX	15-7/8"	19"	20"	②	(2) 26 watt Quad
226TTCP-LEX	15-7/8"	19"	20"	②	(2) 26 watt Triple Tube
232TTCP-LEX	15-7/8"	19"	20"	②	(2) 32 watt Triple Tube
242TTCP-FL-LEX	15-7/8"	19"	20"	④	(2) 42 watt Triple Tube
139BXCP	15-7/8"	19"	20"	①	39 watt Biax
140BXCP	22-1/4"	25-3/8"	26-3/8"	①	40 watt Biax
150BXCP	22-1/4"	25-3/8"	26-3/8"	①	50 watt Biax
155BXCP	22-1/4"	25-3/8"	26-3/8"	①	55 watt Biax
240BXCP	44-1/4"	48"	49"	①	(2) 40 watt Biax
250BXCP	44-1/4"	48"	49"	①	(2) 50 watt Biax
255BXCP	44-1/4"	48"	49"	①	(2) 55 watt Biax
117T-8CP	22-1/4"	25-3/8"	26-3/8"	①	(1) 17 watt T-8
132T-8CP	46-3/4"	49-5/8"	50-5/8"	③	(1) 32 watt T-8

NOTE: All fixtures use electronic ballast with -20° starting temperature.

