


ELP

ENGINEERED LIGHTING
PRODUCTS

DWS SERIES

SURFACE Mount Display Wall Washer

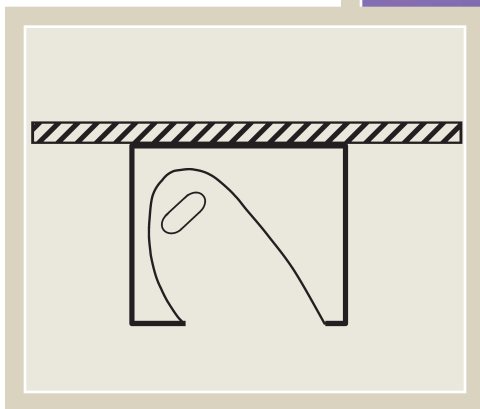

*Ideal placement is 8" to 12"
from the front edge of fixture
to the surface you are
lighting, at 8' to 10' height.*

System

Narrow, wall wash fixtures specifically designed for close placement to the surface to be illuminated (less than 2'). The formed, high purity aluminum reflectors supply a strong vertical throw of light to smooth the brightness at the top of the wall and provide even, unscaloped illumination.



TYPE:
 CATALOG #:
 JOB:

SURFACE Mount Display Wall Washer

Specifications

Narrow, surface mount wall washer for use with Biax, T-8 and T-5 lamps. Fixture is 5" deep with ballast(s) mounted within housing. Strong vertical throw of light allows the fixture to be placed closer to the wall than a typical wall wash unit. The one piece, formed reflector is high purity aluminum (99.9%) with 95% reflectance. It is easily removable without tools for access to the ballast and wiring. Reflector design provides even, unscalped illumination with no glare and offers exceptional lamp shielding from the normal viewing angle.

TGIC polyester powder coated housing is made of 22 gauge CRS with cover and knock-outs that provide quick wire access at the top of the fixture. All fixtures are supplied standard with Luminaire Disconnect.

Continuous Mount – If fixtures are being mounted in a continuous row, add "CC" to the catalog number and provide row configuration, i.e.: (18) 132T8DWS-CC for (6) 12' Rows.



Knock-outs will be provided between continuous fixtures for through wiring.

UL/CUL Damp Location Listed.

U.S. Patent #5,142,459

Options

- Ballast 120 or 277 HPF Electronic (Standard)
 Dimming (Some models) -DM
 Emergency (Some models) -EPP
- Finish White (Standard)
 Custom -Custom
- Reflectors Diffuse Silver (Standard, except T-5)
 Specular Silver -SP
 Painted White (Standard for T-5) -W
- Lens Clear Lexan Mini Lens -ML
 Frosted Lexan Mini Lens -MLF
- Louver Diiffuse Silver Parallel Blade -LV

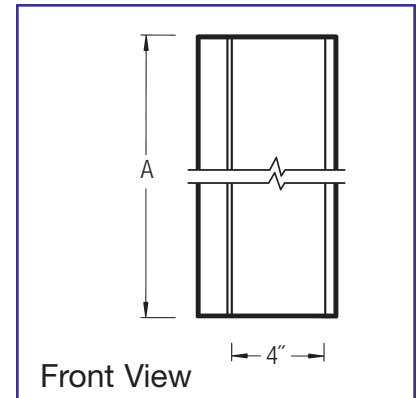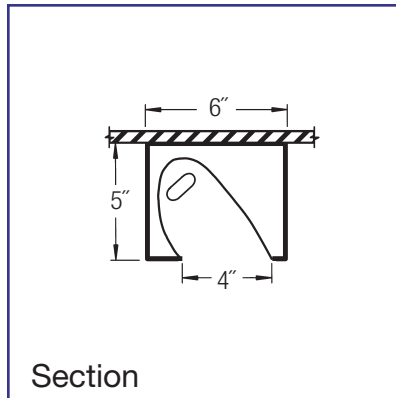

Model No.	A	Lamp
140 BXDWS	24"	40 watt Biax
150 BXDWS	24"	50 watt Biax
155 BXDWS	24"	55 watt Biax
240 BXDWS	48"	(2) 40 watt Biax
250 BXDWS	48"	(2) 50 watt Biax
255 BXDWS	48"	(2) 55 watt Biax
114 T-5DWS-W	24"	14 watt T-5
124 T-5DWS-W	24"	24 watt T-5 HO
121 T-5DWS-W	36"	21 watt T-5
139 T-5DWS-W	36"	39 watt T-5 HO
128 T-5DWS-W	48"	28 watt T-5
154 T-5DWS-W	48"	54 watt T-5 HO
117 T-8DWS	24"	17 watt T-8
125 T-8DWS	36"	25 watt T-8
132 T-8DWS	48"	32 watt T-8