


ELP


ENGINEERED LIGHTING
PRODUCTS

DWTB SERIES

RECESSED Display Wall Wash/Grazer
for T-Bar Lay-in



Wall Washer

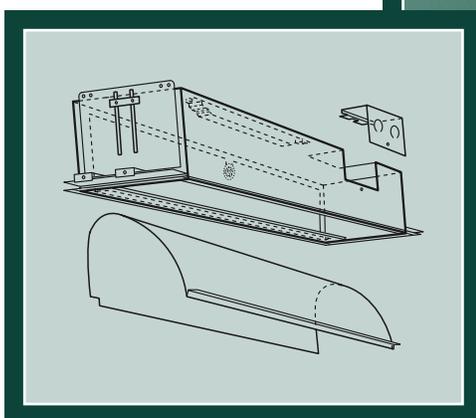

Ideal placement is 8" to 12" from the front edge of fixture to the surface you are lighting, for 8' to 10' ceilings.

System

Narrow, wall wash/grazer fixtures specifically designed for close placement to the surface to be illuminated (less than 2') in suspended ceiling installations. The formed, one piece reflectors supply a strong vertical throw of light to smooth the brightness at the top of the wall and provide even, unscalped illumination.



TYPE:
CATALOG #:
JOB:

RECESSED Display Wall Wash/Grazer for T-Bar Lay-in LED Fixtures

Specifications



Narrow, recessed LED wall wash/grazer for T-Bar installations. The 2' fixture utilizes two high efficacy, LED modules at 22 watts, the 4' has four modules at 44 watts and the 8' fixture has eight modules at 88 watts. Fixtures utilize Osram PrevaLED® arrays that are 80+ CRI and rated greater than 60,000 hours. Strong vertical throw of light allows the fixture to be placed closer to the wall than a typical wall wash/grazer unit. Use only if you are restricted to close placement to the wall. The one piece, formed reflector is TGIC polyester powder coated in high reflectance matte white. It is easily removable without tools for access to the driver and wiring. The indirect reflector design provides even unscalloped illumination with no glare or view of LEDs from any angle.

TGIC polyester powder coated housing is post painted and made of 22 gauge CRS with cover and knock-outs that provide quick wire access to the back of the fixture for through wiring. Fixtures are supplied with Luminaire Disconnect. c/CSA/us Damp Location Listed, IC Rated – Made in the USA

U.S. Patent #9,726,337

Options

- Driver 120/277 0-10 volt, Osram OT True 1% Dim (Standard)
 - With End Of Life Indicator -EOL
 - With Soft Start -SFT
 - With Dim To Off -DTO
- For Alternate Dimming:**
 - 3-wire/Digital, Lutron ECO Systems L3D 1% -DM6
 - Digital, Lutron LDE 1% -DM8
 - LDE Standard Features include Soft-On, Fade to Black and Guaranteed 1% Dimming
 - Lower Lumen Output (All Driver Options) -LL***
- Wireless Osram Sylvania Connected Lighting Module -WLMS***
- LED **Must Specify ***
 - 2700K -27K (90+CRI) ▲
 - 3000K -30K
 - 3500K -35K
 - 4000K -40K
 - 5000K -50K***
- Finish White (Standard)
 - Anti-Microbial White -MB
 - Custom -Custom
- Lens Clear Mini Lens -ML
 - Frosted Mini Lens -MLF
- Louver Diffuse Silver Parallel Blade -LV
- Mounting Individual T-Bar Recessed (Standard)
 - Continuous Slot (no corners) -SLOT
 - Continuous Slot above ceiling (no corners) -RSL0T
 - (Call factory for custom "recess" height)
 - (Slots require row lengths, i.e. (6) 12' Rows)
- Reflector Painted White (-W Standard)

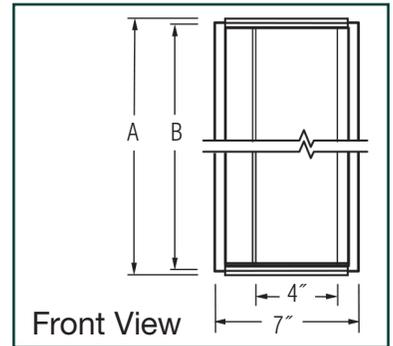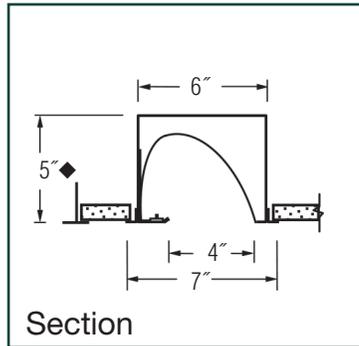

Model No.	A	B	Lamp	**Fixture Lumens
222W1DWTB-W-(* K)	23-7/8	23-7/16"	(2) 10.8w LEDs	1886
444W1DWTB-W-(* K)	47-7/8	47-7/16"	(4) 10.8w LEDs	3772
888W1DWTB-W-(* K)	95-7/8"	95-7/16"	(8) 10.8w LEDs	7544

444W1DWTB-W-35K

(2) Fixtures



Light Levels on the Wall

6' O.C. / 12' to Wall

22	52	56	106	83	74	44	74	83	106	56	52	22
22	47	73	82	75	55	43	55	75	82	73	47	22
14	24	33	37	36	31	28	31	36	37	33	24	14
9	13	17	19	19	18	18	18	19	19	17	13	9
6	8	10	11	12	12	11	12	12	11	10	8	6
4	6	7	7	8	8	8	8	8	7	7	6	4
3	4	5	5	5	5	5	5	5	5	5	4	3

IES File #444W1DW-35 - Initial Light Levels

Note: Calculated with "Luminaire Subdivision" at .1' because of close placement to wall.

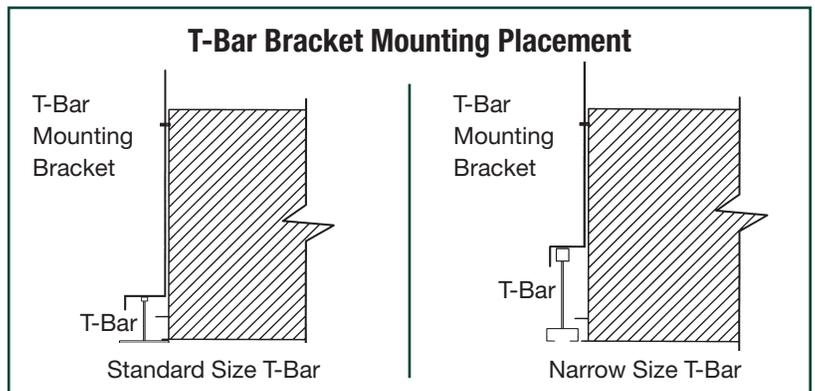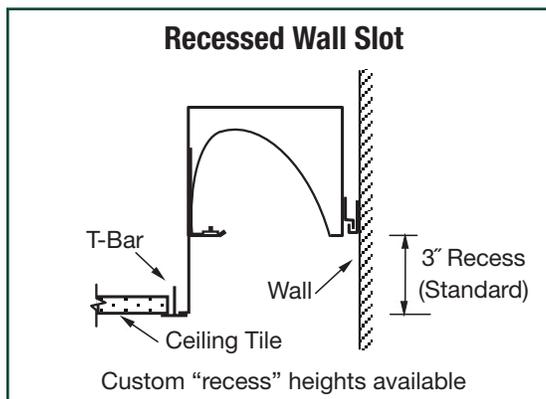

*** Consult Factory.

▲ All fixtures are California Title 24 compliant with 2700K LEDs.

◆ 6' ht. when provided in continuous row with DL Series.

Note: All LED luminaires are provided standard with dimming and have a 5 year warranty.