

INSTALLATION INSTRUCTIONS

DWTB SERIES – Continuous Wall Slot T-Bar Mounting

FOR SUPPLY CONNECTIONS ENTERING THIS FIXTURE USE WIRE SUITABLE FOR AT LEAST 90° C




Display Wash fixtures mounted in a Continuous row at the wall, utilizing 2', 3' & 4' nominal fixtures. System does NOT provide corners.

*** INSTALLATION TO BE DONE IN ACCORDANCE WITH NEC AND APPLICABLE CODES ***


ALUMINUM REFLECTOR CLEANING: Clean reflector with soap & water or alcohol, i.e. Isopropyl Alcohol or other neutral PH factor solvents. Cleaning material should be non-abrasive. **DO NOT** use Ammonia & alkali solutions.

1. Wall mounting bracket and Fixture placement should align against the wall and T-Bar per detail.

2. To remove reflector, push in towards the housing on lamp side with your hand to dislodge the reflector from ledge (B). Carefully grab the reflector at the dislodged edge and pull out of the fixture for access to the ballast.

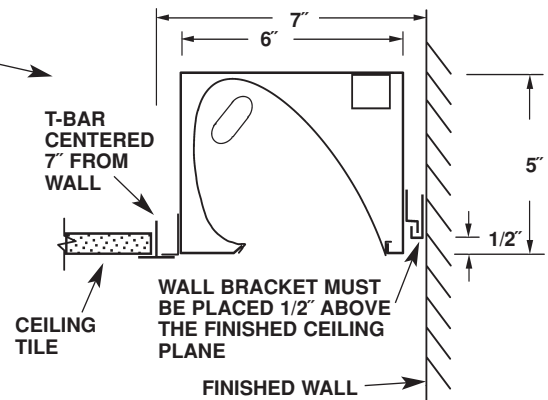


3. Fixtures for T-Bar "Wall Slot" installations are provided with wall bracket to attach fixture at the wall. Fixtures mount end to end along the wall and are to be framed by the "T-Bar" on the other three sides. Secure the fixture to the T-Bar and structure per local codes (typical as shown). Make wire connections through K.O.'s in the cover plate. Reversing cover plate allows power connection from the side or top of fixture. Through wiring holes are provided in fixture housing end plates.

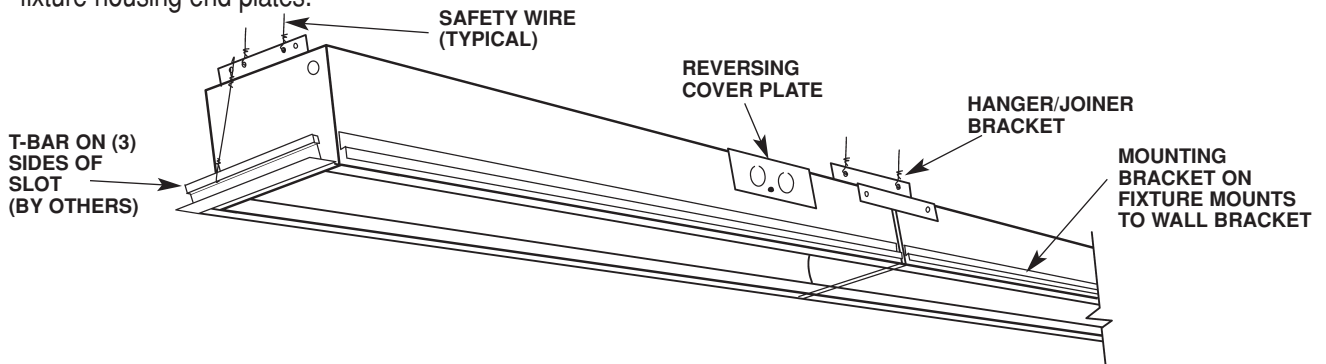

REPLACING THE REFLECTOR SHOULD BE THE LAST STEP AFTER PAINTING AND FINISH WORK

REMOVE THE PROTECTIVE PEEL AND REPLACE REFLECTOR.

4. Place the lamp side of the reflector on (A) ledge and squeeze back into the housing.



5. Push the reflector into (B) ledge. Lamp fixture. Optional Louver is available and snaps into reflector "dimples."

