

ELP


ENGINEERED LIGHTING
PRODUCTS

DW LED SERIES

RECESSED Display Wall Wash/Grazer
for Plaster or Drywall



Wall Washer

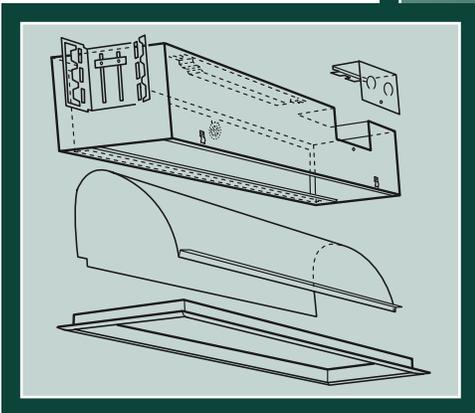

Ideal placement is 8" to 12" from the front edge of the fixture to the surface you are lighting, for 8' to 10' ceilings.

System

Narrow, wall wash/grazer fixtures specifically designed for close placement to the surface to be illuminated (less than 2'). The formed, one piece reflectors supply a strong vertical throw of light to smooth the brightness at the top of the wall and provide even, unscalped illumination.



TYPE:
CATALOG #:
JOB:

**RECESSED Display Wall Wash/Grazer
for Plaster or Drywall**

Specifications

Narrow, recessed LED wall wash/grazer for Drywall installations. The 2' fixture utilizes two high efficacy, LED modules at 22 watts. The 3' utilizes three modules at 33 watts, the 4' has four modules at 44 watts and the 8' fixture has eight modules at 88 watts. Fixtures utilize Osram PrevaLED® arrays that are 80+ CRI and rated greater than 60,000 hours. Strong vertical throw of light allows the fixture to be placed closer to the wall than a typical wall wash/grazer unit. Use only if you are restricted to close placement to the wall. The one piece, formed reflector is TGIC polyester powder coated in high reflectance matte white. It is easily removable without tools for access to the driver and wiring. The indirect reflector design provides even unscalloped illumination with no glare or view of LEDs from any angle. TGIC polyester powder coated housing is post painted and made of 22 gauge CRS with cover and knock-outs that provide quick wire access to the side or back of the fixture for through wiring. All fixtures are supplied with Luminaire Disconnect. The fixture has extruded aluminum trim.

Continuous Mount – If the drywall fixtures are being mounted in a continuous row add "CC" to the catalog number and provide row configuration, so proper trims may be provided, i.e.: (18) 444W1DW-35-CC for (6) 12' rows.

Rough-In Dimensions = (Entire length of row, add all "B" lengths + 1/2") x 6-5/8"



Dimensions do not apply to Trimless installations.

c/CSA/us Damp Location Listed, IC Rated – Made in the USA



U.S. Patent #9,726,337

Options

- Driver 120/277 0-10 volt, Osram OT True 1% Dim (Standard)
 - With End Of Life Indicator -EOL
 - With Soft Start -SFT
 - With Dim To Off -DTO
- For Alternate Dimming:**
 - 3-wire/Digital, Lutron ECO Systems L3D 1% -DM6
 - Digital, Lutron LDE 1% -DM8
 - LDE Standard Features include Soft-On,
 - Fade to Black and Guaranteed 1% Dimming
 - Lower Lumen Output (All Driver Options) -LL***
- Wireless Osram Sylvania Connected Lighting Module -WLMS***
- LED **Must Specify ***
 - 2700K -27K (90+CRI) ▲
 - 3000K -30K
 - 3500K -35K
 - 4000K -40K
 - 5000K -50K***
- Finish White (Standard)
 - Anti-Microbial White -MB
 - Custom -Custom
- Lens Clear Mini Lens -ML
 - Frosted Mini Lens -MLF
 - Clear Full Lens -FL** †
 - Frosted Full Lens -FLF** †
 - Full Face Clear Lens Plate -FFLP ‡
 - w/Captive Screws for -FFLP-WS ‡
- Louver Diffuse Silver Parallel Blade -LV
- Mounting Individual Recessed (Standard)
 - Continuous Gypsum Row (see above) -CC
 - Continuous Slot (no corners) -SLOT
 - Continuous Slot above ceiling (no corners) -RSLOT
 - (Call factory for custom "recess" height)
 - (Continuous requires row lengths, i.e. (6) 12' Rows)
- Reflector Painted White (-W Standard)
- Trimless Gypsum/Drywall Installation -TLD
 - Plaster Installation -TLP
 - (See TRIMLESS sheet for dimensions)
- Hospital Hospital Grade Features -HG
 - (FFLP Lens, Gasket; Anti-Microbial Paint)

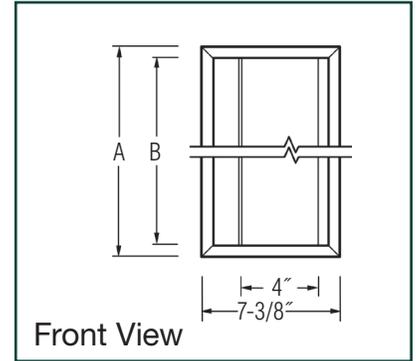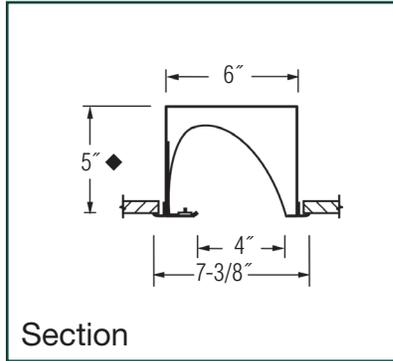

Model No.	A	B	Rough-In 6-5/8"x	Lamp	***Fixture Lumens
222W1DW-W-(*K)	24-5/16"	22-15/16"	23-1/2"	(2) 10.8w LEDs	1886
333W1DW-W-(*K)	37-3/8"	36"	36-1/2"	(3) 10.8w LEDs	2829
444W1DW-W-(*K)	48-5/16"	46-15/16"	47-1/2"	(4) 10.8w LEDs	3772
888W1DW-W-(*K)	97-3/8"	96"	96-1/2"	(8) 10.8w LEDs	7544

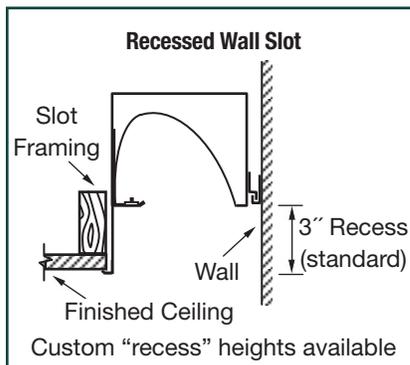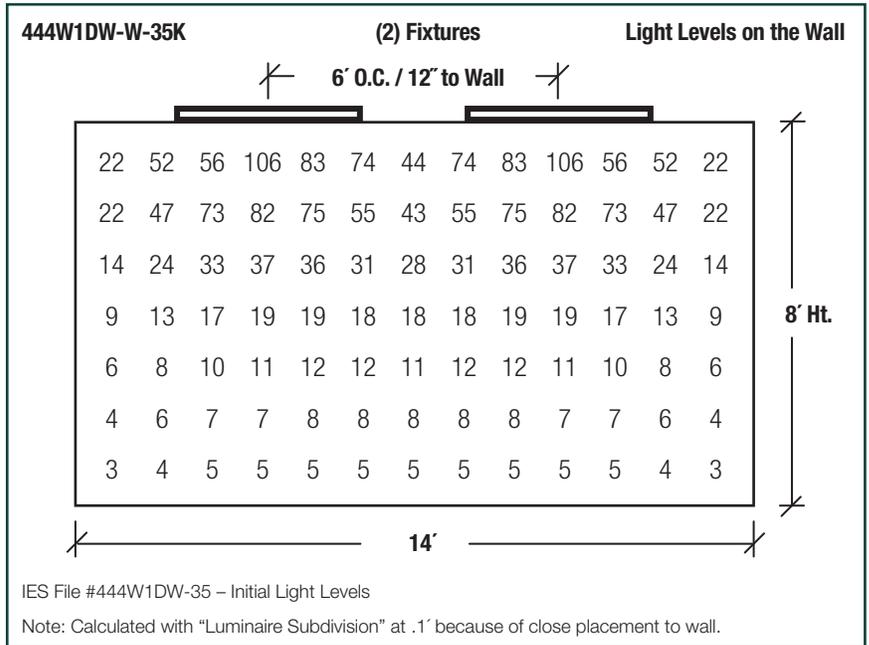

- ** Full Lens Option is held with screws for Continuous Mount and not available for Trimless option.
- *** Consult Factory.
- † Adds 1/8" to overall Length & Width dimensions.
- ‡ Adds 1" to overall Length & Width dimensions and is not available for Continuous Mount or Trimless.
- ▲ Fixtures are California Title 24 compliant with 2700K LEDs.
- ◆ 6" ht. if provided continuous with DL Series.
- Note: All LED luminaires are provided standard with dimming and have a 5 year warranty.