

ELP


ENGINEERED LIGHTING
PRODUCTS

MAXI SERIES

RECESSED Wall Washer
for High Plaster or Drywall Ceilings



Wall Washer

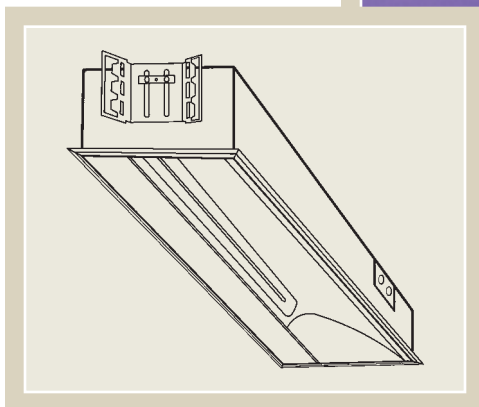

Ideal placement (depending on wall height) is 48" to 66" from the front edge of fixture to the surface you are lighting, for 12' to 14' ceilings.

System

The optics are designed for retail spaces with high ceilings, to provide 40% more light than typical wall wash fixtures in the critical merchandise area from 4' to 7' height. The formed, high purity aluminum reflectors provide even, unscaloped illumination with excellent lamp shielding from the normal viewing angle.



TYPE:
CATALOG #:
JOB:

RECESSED Wall Washer
for High Plaster or Drywall Ceilings

Specifications

Recessed fluorescent wall washer for use with Biax, T-5 and T-8 lamps for drywall installations. The fixture is 5" deep with ballast(s) mounted in the housing. The one-piece formed reflector is high-purity aluminum (99.9%) with 95% reflectance. It is easily removable without tools for access to the ballast and wiring. Reflector design provides even unscalloped illumination with complete lamp shielding even when viewed directly beneath the fixture.

TGIC polyester powder-coated housing is made of 22 gauge CRS with cover and knock-outs that provide quick wire access to side or back of fixture for through wiring. All fluorescent fixtures are supplied standard with Luminaire Disconnect. Trim is extruded aluminum.

Continuous Mount – If the fixtures are being mounted in a continuous row in the ceiling, add "CC" to the catalog number and provide the row configuration so proper trims may be provided. i.e.: (18) 440BXWW -M-CC for (6) 12' rows.

Rough-in Dimension = (Entire length of row, add all "B" lengths + 1/2") x 10-5/8".

Dimensions do *not* apply to Trimless installations. UL/CUL Damp Location listed.

U.S. Patent #5,142,459



Options

- Ballast 120 or 277 HPF Electronic (Standard)
Dimming (Some models) -DM
Emergency (Some models) -EPP
- Finish White (Standard)
Anti-Microbial White -MB
Custom -Custom
- Reflectors Diffuse Silver (Standard)
Specular Silver -SP
Painted White -W
- Lens Clear Full Lens -FL**†
Lexan Frosted Full Lens -FLF**†
Full Face Clear Lens Plate -FFLP**†
Full Face Frosted Lens Plate -FFLPF**†
- Louver Diffuse Silver Parallel Blade -LV
- Trimless Gypsum/Drywall Installation -TLD
Plaster Installation -TLP
(See TRIMLESS sheet for dimensions)
- Hospital Hospital Grade Features -HG
(FFLP Lens; Gasket; Anti-Microbial Paint)

** Full Face Lens Plate Option is not available for Continuous mount (end to end rows) or T-Bar units.

† Adds 1/8" to overall Length & Width dimensions.

‡ Adds 1" to overall Length & Width dimensions.

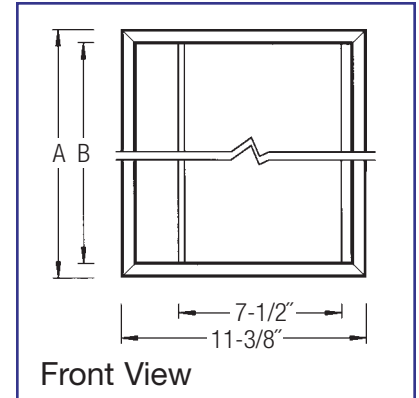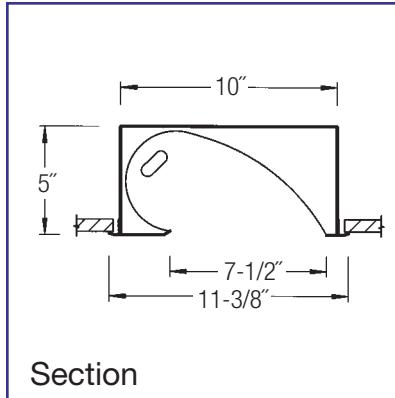

Model No.	A	B	Rough-in Dimensions	Lamp
140 BXWW-M	24-5/16"	22-15/16"	10-5/8" x 23-1/2"	40 watt Biax
150 BXWW-M	24-5/16"	22-15/16"	10-5/8" x 23-1/2"	50 watt Biax
155 BXWW-M	24-5/16"	22-15/16"	10-5/8" x 23-1/2"	55 watt Biax
240 BXWW-M2*	24-5/16"	22-15/16"	10-5/8" x 23-1/2"	(2) 40 watt Biax
250 BXWW-M2*	24-5/16"	22-15/16"	10-5/8" x 23-1/2"	(2) 50 watt Biax
255 BXWW-M2*	24-5/16"	22-15/16"	10-5/8" x 23-1/2"	(2) 55 watt Biax
240 BXWW-M	48-5/16"	46-15/16"	10-5/8" x 47-1/2"	(2) 40 watt Biax
250 BXWW-M	48-5/16"	46-15/16"	10-5/8" x 47-1/2"	(2) 50 watt Biax
255 BXWW-M	48-5/16"	46-15/16"	10-5/8" x 47-1/2"	(2) 55 watt Biax
440 BXWW-M*	48-5/16"	46-15/16"	10-5/8" x 47-1/2"	(4) 40 watt Biax
450 BXWW-M*	48-5/16"	46-15/16"	10-5/8" x 47-1/2"	(4) 50 watt Biax
455 BXWW-M*	48-5/16"	46-15/16"	10-5/8" x 47-1/2"	(4) 55 watt Biax
214 T-5WW-M*	24-5/16"	22-15/16"	10-5/8" x 23-1/2"	(2) 14 watt T-5
224 T-5WW-M*	24-5/16"	22-15/16"	10-5/8" x 23-1/2"	(2) 24 watt T-5 HO
221 T-5WW-M*	37-3/8"	36"	10-5/8" x 36-1/2"	(2) 21 watt T-5
239 T-5WW-M*	37-3/8"	36"	10-5/8" x 36-1/2"	(2) 39 watt T-5 HO
228 T-5WW-M*	48-5/16"	46-15/16"	10-5/8" x 47-1/2"	(2) 28 watt T-5
254 T-5WW-M*	48-5/16"	46-15/16"	10-5/8" x 47-1/2"	(2) 54 watt T-5 HO
217 T-8WW-M*	25-3/8"	24"	10-5/8" x 24-1/2"	(2) 17 watt T-8
225 T-8WW-M*	37-3/8"	36"	10-5/8" x 36-1/2"	(2) 25 watt T-8
232 T-8WW-M*	49-3/8"	48"	10-5/8" x 48-1/2"	(2) 32 watt T-8

* Double lamp fixtures.

