

# INSTALLATION INSTRUCTIONS


## SC SERIES Down Light Surface Mount

Shallow surface or pendent mounted down light.


FOR SUPPLY CONNECTIONS  
ENTERING THIS FIXTURE USE WIRE  
SUITABLE FOR AT LEAST 90° C

### \* INSTALLATION TO BE DONE IN ACCORDANCE WITH *NEC* AND APPLICABLE CODES \*


1. For access to ballast and wiring, the reflector must be removed. The ballast is held in place with screws.

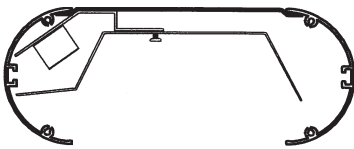


2. After removing the screws, you will be able to maneuver the reflector out of the fixture.

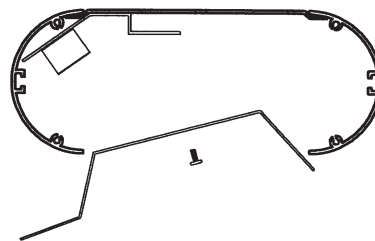


3. With access to the interior, you may secure the fixture to the ceiling or pendants and make wire connections.

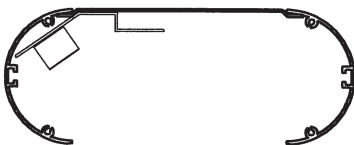

4. To replace the reflector, align the holes and then secure it in place with the screws.

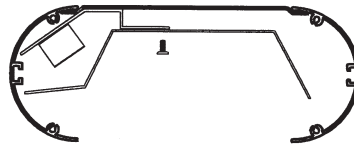

5. After lamping the fixture you may install the louver. Insert the louver in on one side of the fixture so you may maneuver it into the fixture to sit on the ledges.

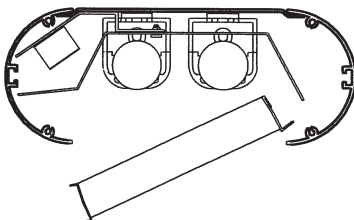

6. After the louver is in place, make sure that the safety chain is tucked into the fixture and not hanging below.

