


ENGINEERED
LIGHTING PRODUCTS



AKC SERIES

*RECESSED Continuous Wall Washer
For Plaster or Drywall*

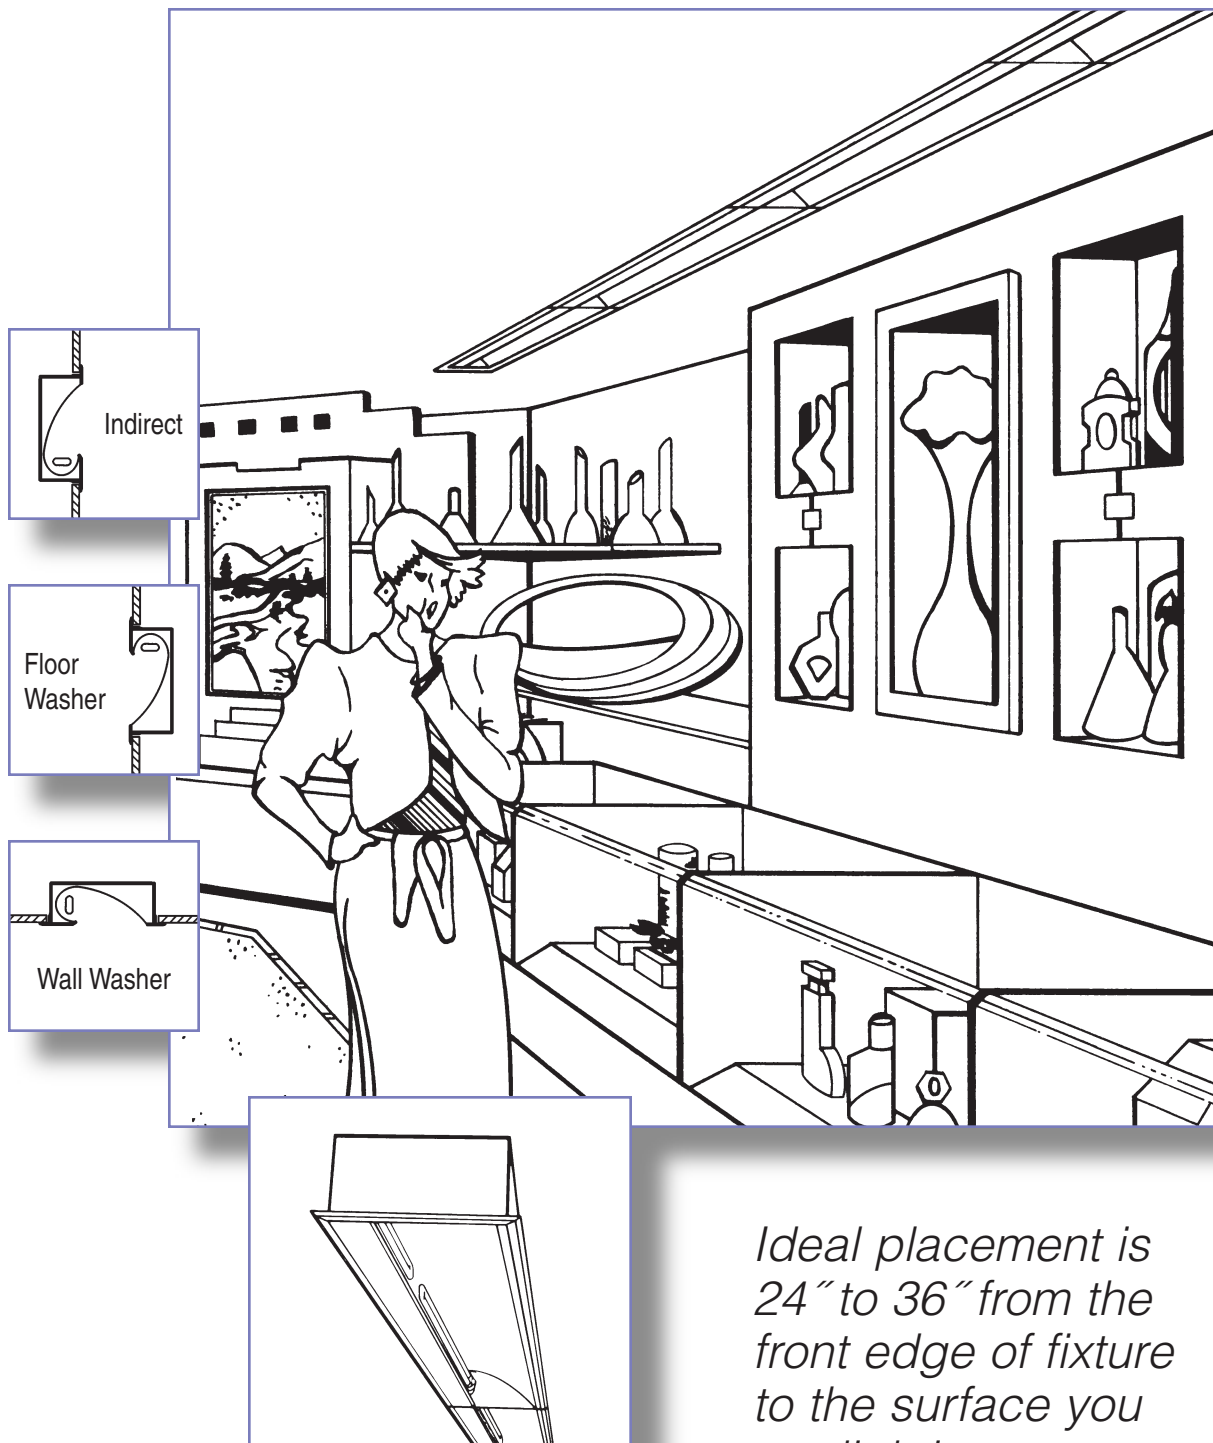

*Ideal placement is
24" to 36" from the
front edge of fixture
to the surface you
are lighting.*



TYPE:
CATALOG #:
JOB:

AKC SERIES

*RECESSED Continuous Wall Washer
For Plaster or Drywall*

SYSTEM

Recessed compact fluorescent wall washer for continuous installation in two and four foot nominal sections. Formed aluminum reflector provides even unscalped illumination with no glare and offers exceptional lamp shielding. Shallow 3-1/2" fixture allows installation in a 4" wall while maintaining the one hour fire rating. UL/CUL Damp Location listed.

U.S. Patent #5,142,459

SPECIFICATIONS



Recessed fluorescent wall washer for use with T-5, or T-8 or Biax lamps. Two and four foot nominal sections mount end to end for continuous installations (3' units available). All fixtures are 3-1/2" deep with the exception of the double lamp T-8 fixtures, which are 5". Both have integral ballast. The one-piece, formed reflector is high-purity aluminum (99.9%) with 95% reflectance. It is easily removable without tools for access to the ballast and wiring. Reflector design provides complete lamp shielding even when viewed directly beneath fixture.

TGIC polyester powder-coated housing is made of 22 gauge CRS with cover and knock-outs that provide quick wire access to side or back of fixture for through wiring. Trim is extruded aluminum.

Specify row configuration when ordering continuous fixtures (i.e. (6) 12' rows).

OPTIONS

Ballast	120 HPF Electronic (Standard)
	277 HPF Electronic
	Dimming (Some models) -DM
	Emergency (Some models) -EPP
Finish	Magnetic -MG
	White (Standard)
	Custom -Custom
Reflectors	Diffuse Silver (Standard)
	Specular Silver -SP
	Stepped Diffuse Silver -ST
	Painted White -W
Lens	Mini Lens -ML
Louver	Parallel Blade Louver -LV
Glare Shield	Suggested for Wall Mounted -GS
	Up-light installations. (N/A for 2 lamp T-8)

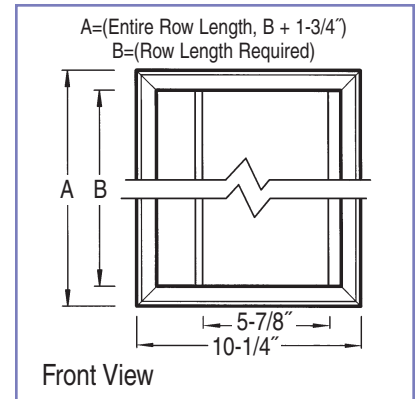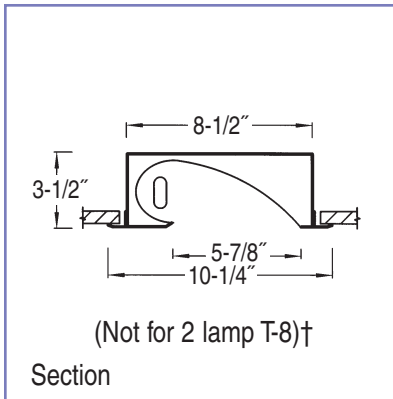

Model No.	Type of Installation	Fixture Length	Lamp
140 BXWW-AKC	(add 'C' for Ceiling or 'W' for Wall)	22-15/16"	40 watt Biax
150 BXWW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	22-15/16"	50 watt Biax
155 BXWW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	22-15/16"	55 watt Biax
240 BXWW-AKC	(add 'C' for Ceiling or 'W' for Wall)	46-15/16"	(2) 40 watt Biax
250 BXWW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	46-15/16"	(2) 50 watt Biax
255 BXWW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	46-15/16"	(2) 55 watt Biax
114 T-5WW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	22-15/16"	14 watt T-5
214 T-5WW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	22-15/16"	(2) 14 watt T-5
124 T-5WW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	22-15/16"	24 watt T-5 HO
224 T-5WW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	22-15/16"	(2) 24 watt T-5 HO
128 T-5WW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	46-15/16"	28 watt T-5
228 T-5WW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	46-15/16"	(2) 28 watt T-5
154 T-5WW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	46-15/16"	54 watt T-5 HO
254 T-5WW-AKC*	(add 'C' for Ceiling or 'W' for Wall)	46-15/16"	(2) 54 watt T-5 HO
117 T-8WW-AKC	(add 'C' for Ceiling or 'W' for Wall)	24"	17 watt T-8
132 T-8WW-AKC	(add 'C' for Ceiling or 'W' for Wall)	48"	32 watt T-8
217 T-8WW-AKC†	(add 'C' for Ceiling or 'W' for Wall)	24"	(2) 17 watt T-8
232 T-8WW-AKC†	(add 'C' for Ceiling or 'W' for Wall)	48"	(2) 32 watt T-8

Rough-In Dimensions = (Entire length of row + 1/2") x 9-1/8" or 10-5/8" for two lamp T-8.

† T-8 Double lamp housing is 10"W x 5"Ht.

* Magnetic ballast not available

