


**ENGINEERED  
LIGHTING PRODUCTS**




# **AK SERIES**


*RECESSED Wall Washer  
For Plaster or Drywall*




Wall Washer



Floor  
Washer



Indirect

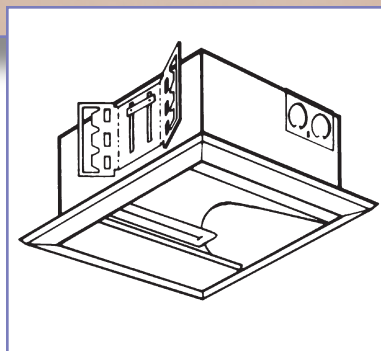

**Project**

Wilbur Medical Plaza  
Tarzana, California

**Interior Designer**

McCabe Design  
Long Beach, California

**Specifier**

McCabe Design  
Long Beach, California

**Photographer**

Michael Sean  
South Pasadena, California

**Lighting**

139 BXWW-AK, 39 watts

*Ideal placement is  
24" to 36" from the  
front edge of fixture  
to the surface you  
are lighting.*



TYPE:  
CATALOG #:  
JOB:

# AK SERIES

*RECESSED Wall Washer  
For Plaster or Drywall*

## SYSTEM

Recessed wall washer with a formed aluminum reflector provides even unscaloped illumination with no glare and offers exceptional lamp shielding. The shallow 3-1/2" fixture allows installation in a standard 4" wall while maintaining the one hour fire rating (see installation instructions). UL/CUL Damp Location listed.

**U.S. Patent #5,142,459**




## SPECIFICATIONS

Recessed wall washer for use with PL, Quad, Triple Tube, Biax, T-5 and T-8 fluorescent lamps and the T-10 incandescent lamp. All fixtures are 3-1/2" deep with the exception of the double lamp T-8 fixtures, which are 5". Both have integral ballast. The one-piece, formed reflector is high-purity aluminum (99.9%) with 95% reflectance. It is easily removable without tools for access to the ballast and wiring. Reflector design provides complete lamp shielding even when viewed directly beneath the fixture (Triple Tube lamps not entirely shielded).

TGIC polyester powder coated housing is made of 22 gauge CRS with cover and knock-outs that provide quick wire access to side or back of fixture for through wiring. Trim is extruded aluminum.

## OPTIONS

Ballast	120 HPF Electronic (Standard)
	277 HPF Electronic
	Dimming (Some models) -DM
	Emergency (Some models) -EPP
Finish	Magnetic -MG
	White (Standard)
Reflectors	Custom -Custom
	Diffuse Silver (Standard)
	Specular Silver -SP
	Stepped Diffuse Silver -ST
Lens	Painted White -W
	Mini Lens -ML
Louver	Full Lens -FL
	Parallel Blade Louver -LV
Glare Shield	Up light installations. (N/A for 2 lamp T-8)
	Suggested for Wall Mounted -GS
Trimless	Plaster to Fixture Opening -TL (Opening is 5-7/8" x B" dim).

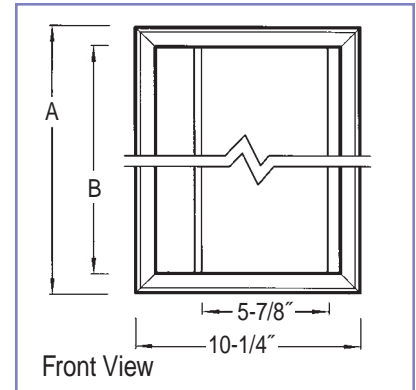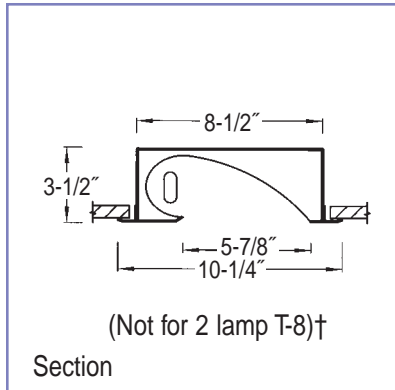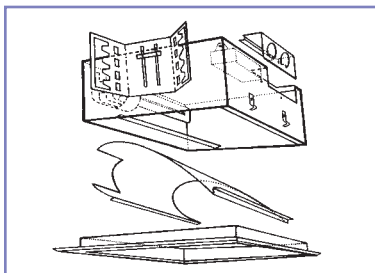

Model No.	A	B	Rough-in Dimensions	Lamp
160 T-10WW-AK	10-1/4"	8-1/2"	9-1/8" x 9"	60 watt T-10 Inc.
113 PLWW-AK	10-1/4"	8-1/2"	9-1/8" x 9"	13 watt PL
213 PLWW-AK	19-3/4"	18"	9-1/8" x 18-1/2"	(2) 13 watt PL
126 QDWW-AK	10-1/4"	8-1/2"	9-1/8" x 9"	26 watt Quad
226 QDWW-AK	19-3/4"	18"	9-1/8" x 18-1/2"	(2) 26 watt Quad
118 TTWW-AK*	10-1/4"	8-1/2"	9-1/8" x 9"	18 watt Triple Tube
218 TTWW-AK*	19-3/4"	18"	9-1/8" x 18-1/2"	(2) 18 watt Triple Tube
126 TTWW-AK*	10-1/4"	8-1/2"	9-1/8" x 9"	26 watt Triple Tube
226 TTWW-AK*	19-3/4"	18"	9-1/8" x 18-1/2"	(2) 26 watt Triple Tube
132 TTWW-AK*	10-1/4"	8-1/2"	9-1/8" x 9"	32 watt Triple Tube
232 TTWW-AK*	19-3/4"	18"	9-1/8" x 18-1/2"	(2) 32 watt Triple Tube
142 TTWW-AK*	10-1/4"	8-1/2"	9-1/8" x 9"	42 watt Triple Tube
157 TTWW-AK	13-3/4"	12"	9-1/8" x 12-1/2"	57 watt Triple Tube
242 TTWW-AK*	19-3/4"	18"	9-1/8" x 18-1/2"	(2) 42 watt Triple Tube
118 BXWW-AK	13-3/4"	12"	9-1/8" x 12-1/2"	18 watt Biax
127 BXWW-AK	15-3/4"	14"	9-1/8" x 14-1/2"	27 watt Biax
139 BXWW-AK	19-3/4"	18"	9-1/8" x 18-1/2"	39 watt Biax
140 BXWW-AK	24-11/16"	22-15/16"	9-1/8" x 23-1/2"	40 watt Biax
150 BXWW-AK*	24-11/16"	22-15/16"	9-1/8" x 23-1/2"	50 watt Biax
155 BXWW-AK*	24-11/16"	22-15/16"	9-1/8" x 23-1/2"	55 watt Biax
239 BXWW-AK	37-3/4"	36"	9-1/8" x 36-1/2"	(2) 39 watt Biax
240 BXWW-AK	48-11/16"	46-15/16"	9-1/8" x 47-1/2"	(2) 40 watt Biax
250 BXWW-AK*	48-11/16"	46-15/16"	9-1/8" x 47-1/2"	(2) 50 watt Biax
255 BXWW-AK*	48-11/16"	46-15/16"	9-1/8" x 47-1/2"	(2) 55 watt Biax
114 T-5WW-AK*	24-11/16"	22-15/16"	9-1/8" x 23-1/2"	14 watt T-5
214 T-5WW-AK*	24-11/16"	22-15/16"	9-1/8" x 23-1/2"	(2) 14 watt T-5
124 T-5WW-AK*	24-11/16"	22-15/16"	9-1/8" x 23-1/2"	24 watt T-5 HO
224 T-5WW-AK*	24-11/16"	22-15/16"	9-1/8" x 23-1/2"	(2) 24 watt T-5 HO
121 T-5WW-AK*	37-3/4"	36"	9-1/8" x 36-1/2"	21 watt T-5
221 T-5WW-AK*	37-3/4"	36"	9-1/8" x 36-1/2"	(2) 21 watt T-5
139 T-5WW-AK*	37-3/4"	36"	9-1/8" x 36-1/2"	39 watt T-5 HO
239 T-5WW-AK*	37-3/4"	36"	9-1/8" x 36-1/2"	(2) 39 watt T-5 HO
128 T-5WW-AK*	48-11/16"	46-15/16"	9-1/8" x 47-1/2"	28 watt T-5
228 T-5WW-AK*	48-11/16"	46-15/16"	9-1/8" x 47-1/2"	(2) 28 watt T-5
154 T-5WW-AK*	48-11/16"	46-15/16"	9-1/8" x 47-1/2"	54 watt T-5 HO
254 T-5WW-AK*	48-11/16"	46-15/16"	9-1/8" x 47-1/2"	(2) 54 watt T-5 HO
117 T-8WW-AK	25-3/4"	24"	9-1/8" x 24-1/2"	* 17 watt T-8
125 T-8WW-AK	37-3/4"	36"	9-1/8" x 36-1/2"	* 25 watt T-8
132 T-8WW-AK	49-3/4"	48"	9-1/8" x 48-1/2"	* 32 watt T-8
217 T-8WW-AK†	25-3/4"	24"	10-5/8" x 24-1/2"	(2) 17 watt T-8
225 T-8WW-AK†	37-3/4"	36"	10-5/8" x 36-1/2"	(2) 25 watt T-8
232 T-8WW-AK†	49-3/4"	48"	10-5/8" x 48-1/2"	(2) 32 watt T-8