


ENGINEERED
LIGHTING PRODUCTS



CLC SERIES

*SURFACE Wall Mount Cornice Cove Light
For Plaster or Drywall*

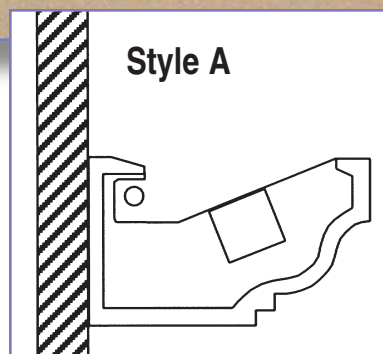

*Decorative pre-fabricated
cove with integral high
performance cove
lighting system*



TYPE:
CATALOG #:
JOB:

CLC SERIES

*SURFACE Wall Mount Cornice Cove Light
For Plaster or Drywall*

SYSTEM

Wall mounted, GRG (fiberglass reinforced composite) cove system which combines a continuous decorative cast GRG cove with a high performance cove lighting system. The asymmetric reflector design distributes uniform light into the space while minimizing socket shadowing.

UL/CUL Listed

SPECIFICATIONS

Cove light system for use with Biax, T-5 and T-8 fluorescent lamps. The cove casting is available in four standard styles and is provided in 8-foot sections that may be cut in the field. Inside and outside 90° corners are available, contact factory for details. The lighting component is complete with a formed reflector that is matte white, TGIC polyester powder coated, integral ballast and lamp sockets. The integration of the lighting component into the casting is designed for fast easy installation.

OPTIONS

Ballast 120 Electronic (Standard)
277 Electronic
Dimming (Some models) -DM
Emergency (Some models) -EPP


GRG Casting A, B, C, or D Style (Standard)
Custom Available

Lens Full Lens -FL

INSTALLATION

NOTE: The casting should be installed by the drywall contractor and the lighting system by the electrical contractor.

- 1) Set level line control points on the wall that is receiving the light cove system.
- 2) Mount cove casting to wall framing and secure joints.
- 3) Use standard drywall tape and joint compound at the casting joints and edges that meet the structure.
- 4) Sand and finish like typical drywall seam.
- 5) Finish casting with interior wall.
- 6) Make electrical connections and secure the reflector assembly to the casting.

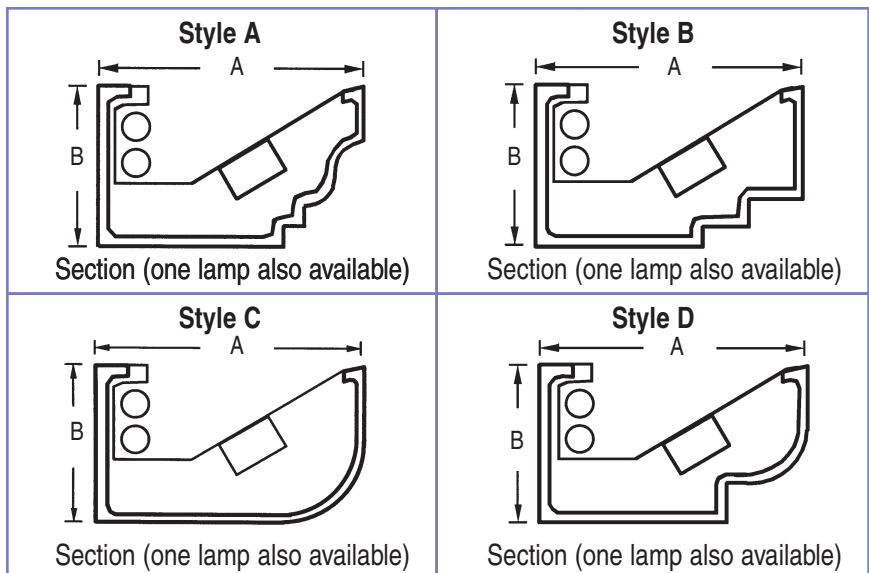

Model No.	A	B	Lighting Component**	Lamp
114 T-5CLC- (*)-8	7-3/4"	5-1/4"	23"	14 watt T-5
214 T-5CLC- (*)-8	7-3/4"	5-1/4"	23"	(2) 14 watt T-5
124 T-5CLC- (*)-8	7-3/4"	5-1/4"	23"	24 watt T-5 HO
224 T-5CLC- (*)-8	7-3/4"	5-1/4"	23"	(2) 24 watt T-5 HO
121 T-5CLC- (*)-8	7-3/4"	5-1/4"	34-3/4"	21 watt T-5
221 T-5CLC- (*)-8	7-3/4"	5-1/4"	34-3/4"	(2) 21 watt T-5
139 T-5CLC- (*)-8	7-3/4"	5-1/4"	34-3/4"	39 watt T-5 HO
239 T-5CLC- (*)-8	7-3/4"	5-1/4"	34-3/4"	(2) 39 watt T-5 HO
128 T-5CLC- (*)-8	7-3/4"	5-1/4"	46-1/2"	28 watt T-5
228 T-5CLC- (*)-8	7-3/4"	5-1/4"	46-1/2"	(2) 28 watt T-5
154 T-5CLC- (*)-8	7-3/4"	5-1/4"	46-1/2"	54 watt T-5 HO
254 T-5CLC- (*)-8	7-3/4"	5-1/4"	46-1/2"	(2) 54 watt T-5 HO
117 T-8CLC- (*)-10†	10"	5-1/2"	24"	17 watt T-8
217 T-8CLC- (*)-10	10"	5-1/2"	24"	(2) 17 watt T-8
125 T-8CLC- (*)-10†	10"	5-1/2"	36"	25 watt T-8
225 T-8CLC- (*)-10	10"	5-1/2"	36"	(2) 25 watt T-8
132 T-8CLC- (*)-10†	10"	5-1/2"	48"	32 watt T-8
232 T-8CLC- (*)-10	10"	5-1/2"	48"	(2) 32 watt T-8
140 BXCLC- (*)-10†	10"	5-1/2"	24"	40 watt Biax
240 BXCLC24- (*)-10	10"	5-1/2"	24"	(2) 40 watt Biax
150 BXCLC- (*)-10†	10"	5-1/2"	24"	50 watt Biax
250 BXCLC24- (*)-10	10"	5-1/2"	24"	(2) 50 watt Biax
155 BXCLC- (*)-10†	10"	5-1/2"	24"	55 watt Biax
255 BXCLC24- (*)-10	10"	5-1/2"	24"	(2) 55 watt Biax
240 BXCLC- (*)-10†	10"	5-1/2"	48"	(2) 40 watt Biax
440 BXCLC- (*)-10	10"	5-1/2"	48"	(4) 40 watt Biax
250 BXCLC- (*)-10†	10"	5-1/2"	48"	(2) 50 watt Biax
450 BXCLC- (*)-10	10"	5-1/2"	48"	(4) 50 watt Biax
255 BXCLC- (*)-10†	10"	5-1/2"	48"	(2) 55 watt Biax
455 BXCLC- (*)-10	10"	5-1/2"	48"	(4) 55 watt Biax

* Insert **Style designation A B C or D** to indicate the style of casting.

** Determine sectional lighting components required for complete run.

† Also available in the 7-3/4" wide casting, order as **-8** instead of **-10**