

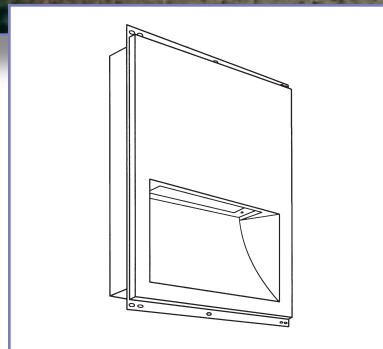



ENGINEERED
LIGHTING PRODUCTS



HITW-EX SERIES

*RECESSED Hole In The Wall Light Niche
For Exterior Stucco Construction*



*Ideal placement is
18" to 30" from the
bottom edge of
fixture to the ground.*



TYPE:
CATALOG #:
JOB:

HITW-EX SERIES

*RECESSED Hole In The Wall Light Niche
For Exterior Stucco Construction*

SYSTEM

Recessed, fiberglass reinforced, composite fixture for use in exterior stucco construction. The cast fixture appears to be part of the architecture and looks like a custom formed "light niche" that blends with any exterior motif. Non I.C. Rated.

UL/CUL Wet Location listed.

SPECIFICATIONS

Recessed fixture for use with several compact fluorescent, incandescent, halogen and LED lamping options. The cast fixture houses a ballast box with heat sink that includes wiring, socket, ballast and reflector. Incandescent fixture also has thermal protector.



Fluorescent fixtures provide knock-outs for through wiring. Casting is secured to the 20 gauge electro-plated galvanized steel fixture back box and a 18 gauge electro-plated galvanized steel frame with lexan lens and silicone gaskets seal the lamp compartment.

Frame, ballast box, and fixture back box are TGIC polyester powder coated. Composite casting is water and high impact resistant. Use "Weld-crete" to finish surface to match exterior stucco.

OPTIONS

Ballast Low Temp 120 HPF Electronic (Standard)
Low Temp 277 HPF Electronic

See Installation Instructions.

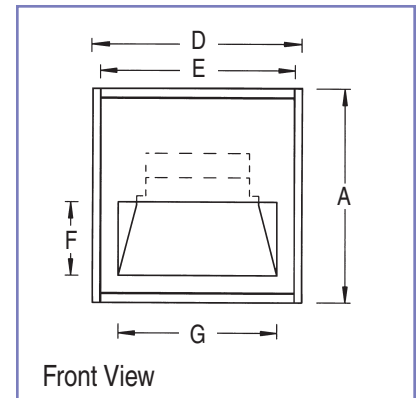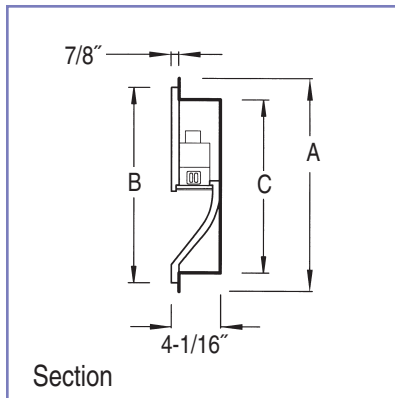

Model No.	A	B	C	D	E	F	G	Lamp
125HAL-HITW-EX-4x6	13-1/2"	12"	10"	10-1/8"	8-5/8"	4"	5-5/8"	25 watt T-4 Halogen, G9
110IN-HITW-EX-4x6	13-1/2"	12"	10"	10-1/8"	8-5/8"	4"	5-5/8"	10 watt C7 Inc. Nightlight
11C-HITW-EX-4x6	13-1/2"	12"	10"	10-1/8"	8-5/8"	4"	5-5/8"	1 CCT White LED
12C-HITW-EX-4x6	13-1/2"	12"	10"	10-1/8"	8-5/8"	4"	5-5/8"	2 CCT White/Amber LED
120IN-HITW-EX-6x13	17-1/2"	16"	14-1/4"	17-1/2"	16"	6"	13"	20 watt Mini Can Inc.
160IN-HITW-EX-6x13	17-1/2"	16"	14-1/4"	17-1/2"	16"	6"	13"	60 watt T-10 Inc.
113 PL-HITW-EX-6x13	17-1/2"	16"	14-1/4"	17-1/2"	16"	6"	13"	13 watt PL
126 QD-HITW-EX-6x13	17-1/2"	16"	14-1/4"	17-1/2"	16"	6"	13"	26 watt Quad
118 QD-HITW-EX-8x8	17-1/2"	16"	14-1/4"	17-1/2"	16"	8"	8"	18 watt Quad
126 TT-HITW-EX-8x8	17-1/2"	16"	14-1/4"	17-1/2"	16"	8"	8"	26 watt Triple Tube

NOTE: All fluorescent fixtures have electronic ballast with -20° starting temperature.

Installation should be coordinated between electrician and exterior finish contractor.

The exterior finish contractor must provide waterproof seal where fixture joins the building.

