


ENGINEERED
LIGHTING PRODUCTS




MP & MPTB SERIES


*RECESSED T-5 Wall Washer
For Drywall and T-Bar*




Indirect



Floor
Washer



Wall Washer

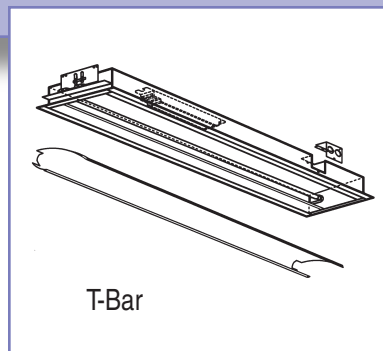

T-Bar

*Ideal placement is
24" to 36" from the
front edge of fixture
to the surface you
are lighting.*



TYPE:
CATALOG #:
JOB:

MP & MPTB SERIES

RECESSED T-5 Wall Washer For Drywall and T-Bar

SYSTEM

Recessed miniature profile wall wash fixture using compact T-5 fluorescent linear lamps. The formed one-piece aluminum reflector provides even unscaloped illumination with no glare and offers exceptional lamp shielding. Drywall fixtures may be recessed in a standard 4" wall while maintaining the one-hour fire rating (see installation instructions).
UL/CUL Damp Location listed.

U.S. Patent #5,142,459

SPECIFICATIONS

Small, recessed linear wall wash fixture using one or two compact T-5 fluorescent linear lamps in T-Bar or drywall installations. The one-lamp fixture is 2-1/2" deep with ballast(s) mounted in the housing. The one-piece, formed reflector is high-purity aluminum (99.9%) with 95% reflectance. It is easily removable without tools for access to the ballast and wiring. Reflector design provides complete lamp shielding even when viewed directly beneath the fixture.


TGIC polyester powder coated housing is made of 22 gauge CRS with cover and knock-outs that provide quick wire access to side or back of fixture for through wiring. Drywall trim is extruded aluminum.

Continuous Mount – If the drywall fixtures are being mounted in a continuous row add "CC" (if in ceiling) or "CW" (if in wall) to the catalog number and provide row configuration (i.e. (6) 12' rows).


Rough-In Dimension = (Entire length of row, add all "B" lengths + 1/2") x 6-5/8".

OPTIONS


Ballast	120 Electronic (Standard)
	277 Electronic
	Dimming (Some models) -DM
	Emergency (Some models) -EPP
Finish	White (Standard)
	Custom -Custom
Reflectors	Diffuse Silver (Standard)
	Specular Silver -SP
	Painted White -W
Lens	Mini Lens -ML
	Full Lens -FL (Individual Drywall Only)
Louver	Parallel Blade Louver -LV
Trimless	Plaster to Fixture Opening -TL (Opening is 4" x B" dim)



Section Double Lamp Fixtures

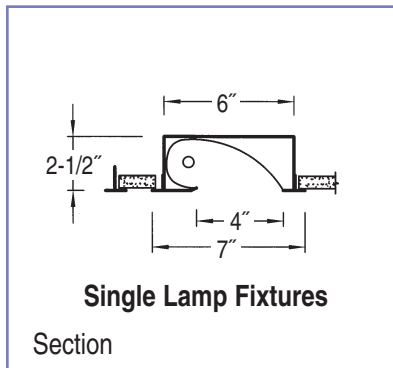


Section

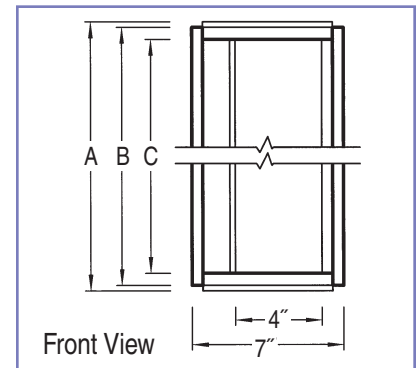


Front View

T-BAR INSTALLATIONS (NO TRIM)

Model No.	A	B	C	Lamp
114 T-5WW-MPTB*	23-13/16"	23-7/16"	22-1/2"	14 watt T-5
214 T-5WW-MPTB*†	23-13/16"	23-7/16"	22-1/2"	(2) 14 watt T-5
124 T-5WW-MPTB*	23-13/16"	23-7/16"	22-1/2"	24 watt T-5 HO
224 T-5WW-MPTB*†	23-13/16"	23-7/16"	22-1/2"	(2) 24 watt T-5 HO
128 T-5WW-MPTB*	47-13/16"	47-7/16"	46-1/8"	28 watt T-5
228 T-5WW-MPTB*†	47-13/16"	47-7/16"	46-1/8"	(2) 28 watt T-5
154 T-5WW-MPTB*	47-13/16"	47-7/16"	46-1/8"	54 watt T-5 HO
254 T-5WW-MPTB*†	47-13/16"	47-7/16"	46-1/8"	(2) 54 watt T-5 HO

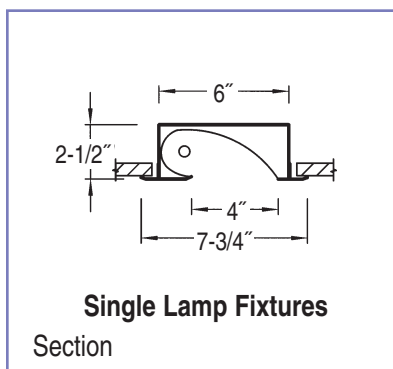

Section

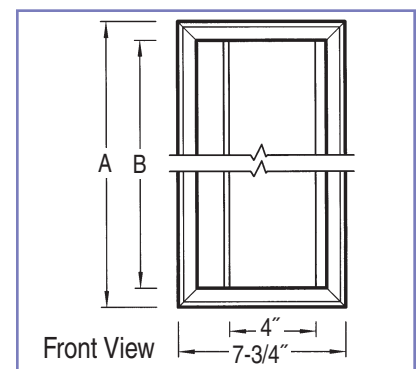

Front View

DRYWALL INSTALLATIONS

Model No.	A	B	Rough-In	Lamp
114 T-5WW-MP*	24-1/4"	22-1/2"	6-5/8" x 23"	14 watt T-5
214 T-5WW-MP*†	24-1/4"	22-1/2"	6-5/8" x 23"	(2) 14 watt T-5
124 T-5WW-MP*	24-1/4"	22-1/2"	6-5/8" x 23"	24 watt T-5 HO
224 T-5WW-MP*†	24-1/4"	22-1/2"	6-5/8" x 23"	(2) 24 watt T-5 HO
121 T-5WW-MP*	36-1/16"	34-5/16"	6-5/8" x 34-13/16"	21 watt T-5
221 T-5WW-MP*†	36-1/16"	34-5/16"	6-5/8" x 34-13/16"	(2) 21 watt T-5
139 T-5WW-MP*	36-1/16"	34-5/16"	6-5/8" x 34-13/16"	39 watt T-5 HO
239 T-5WW-MP*†	36-1/16"	34-5/16"	6-5/8" x 34-13/16"	(2) 39 watt T-5 HO
128 T-5WW-MP*	47-7/8"	46-1/8"	6-5/8" x 46-5/8"	28 watt T-5
228 T-5WW-MP*†	47-7/8"	46-1/8"	6-5/8" x 46-5/8"	(2) 28 watt T-5
154 T-5WW-MP*	47-7/8"	46-1/8"	6-5/8" x 46-5/8"	54 watt T-5 HO
254 T-5WW-MP*†	47-7/8"	46-1/8"	6-5/8" x 46-5/8"	(2) 54 watt T-5 HO