

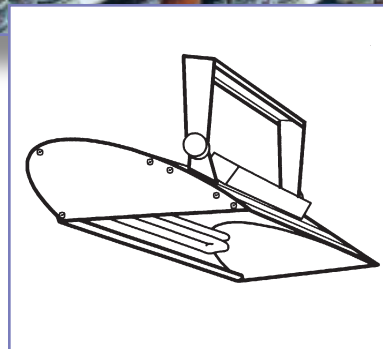



**ENGINEERED
LIGHTING PRODUCTS**



SY SERIES

YOKE Mounted Wall Washer



Project
Bristol Farms
Westlake Village, California

Specifier
E. Effron
Pasadena, California

Photographer
Mark Dell'Aquila
Long Beach, California

Lighting
140BXWW-SY, 40 watts

*Ideal placement is
24" to 36" from the
front edge of fixture to
the surface you are
lighting.*



TYPE:
CATALOG #:
JOB:

SY SERIES

YOKE Mounted Wall Washer

SYSTEM

Yoke-mounted compact fluorescent wall wash fixtures with several mounting options offer complete adjustability. Reflector design provides even unscaloped illumination with no glare. UL/CUL/CE Damp Location listed.



U.S. Patent #5,142,459

SPECIFICATIONS

Yoke-mounted fluorescent wall washer for use with PL, Quad, Biax & T-8 lamps. The fixture is extruded aluminum with attached ballast compartment finished with TGIC polyester powder coating. The formed reflector is high-purity aluminum (99.9%) with 95% reflectance. Knobs at yoke provide complete adjustability.

OPTIONS

Ballast	120 HPF Electronic (Standard)
	277 HPF Electronic
	Dimming (Some models) -DM
	Emergency (Some models) -EPP
Finish	White (Standard)
	Custom -Custom
Mounting	Yoke (Standard)
	For additional mounting, see Accessories page IS-10M.
Reflector	Diffuse Silver (Standard)
	White -W
Lens	Mini Lens -ML
Louver	Parallel Blade Louver -LV

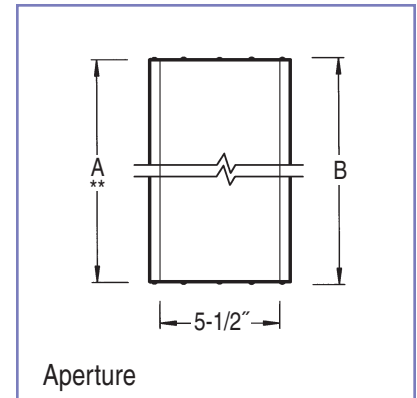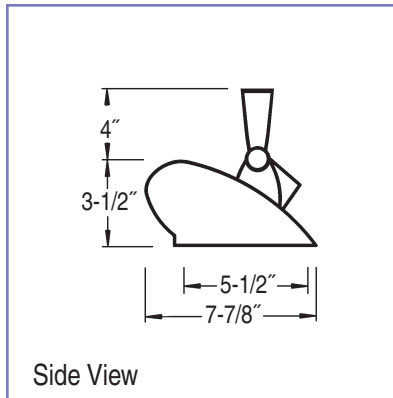


Model No.	A**	B	Lamp
113 PLWW-SY	8-3/4"	8-7/8"	13 watt PL
213 PLWW-SY	18-1/4"	18-3/8"	(2) 13 watt PL
126 QDWW-SY	8-3/4"	8-7/8"	26 watt Quad
226 QDWW-SY	18-1/4"	18-3/8"	(2) 26 watt Quad
126 TTWW-SY	8-3/4"	8-7/8"	26 watt Triple Tube
132 TTWW-SY	8-3/4"	8-7/8"	32 watt Triple Tube
142 TTWW-SY	8-3/4"	8-7/8"	42 watt Triple Tube
226 TTWW-SY	18-1/4"	18-3/8"	(2) 26 watt Triple Tube
232 TTWW-SY	18-1/4"	18-3/8"	(2) 32 watt Triple Tube
242TTWW-SY	18-1/4"	18-3/8"	(2) 42 watt Triple Tube
118 BXWW-SY	12-1/4"	12-3/8"	18 watt Biax
127 BXWW-SY	14-1/4"	14-3/8"	27 watt Biax
139 BXWW-SY	18-1/4"	18-3/8"	39 watt Biax
140 BXWW-SY	24-1/4"	24-3/8"	40 watt Biax
150 BXWW-SY*	24-1/4"	24-3/8"	50 watt Biax
155 BXWW-SY*	24-1/4"	24-3/8"	55 watt Biax
239 BXWW-SY	36-1/4"	36-3/8"	(2) 39 watt Biax
240 BXWW-SY	48-1/4"	48-3/8"	(2) 40 watt Biax
250 BXWW-SY*	48-1/4"	48-3/8"	(2) 50 watt Biax
255 BXWW-SY*	48-1/4"	48-3/8"	(2) 55 watt Biax
440 BXWW-SY	96-5/16"	96-7/16"	(4) 40 watt Biax
450 BXWW-SY*	96-5/16"	96-7/16"	(4) 50 watt Biax
455 BXWW-SY*	96-5/16"	96-7/16"	(4) 55 watt Biax
124 T5WW-SY	24-1/4"	24-3/8"	24 watt T-5 HO
139 T5WW-SY	36-1/4"	36-3/8"	39 watt T-5 HO
154 T5WW-SY	48-1/4"	48-3/8"	54 watt T-5 HO
224 T5WW-SY	24-1/4"	24-3/8"	(2) 24 watt T-5 HO
239 T5WW-SY	36-1/4"	36-3/8"	(2) 39 watt T-5 HO
254 T5WW-SY	48-1/4"	48-3/8"	(2) 54 watt T-5 HO
454 T5WW-SY	96-5/16"	96-7/16"	(4) 54 watt T-5 HO
132 T8WW-SY	48-1/4"	48-3/8"	32 watt T-8
232 T8WW-SY	96-5/16"	96-7/16"	(2) 32 watt T-8

* Magnetic ballast not available.

** Use this dimension for continuous rows with joiner brackets.

NOTE: Standard T-5 lamps are available for:
3' fixtures, replace the "39" with "21"



2' fixtures, replace the "24" with "14"
4' fixtures, replace the "54" with "28"



SY SERIES

Fixtures are standardly provided with a yoke that would mount directly to the ceiling or structure using screws or drywall bolts (by others).

TRACK MOUNT

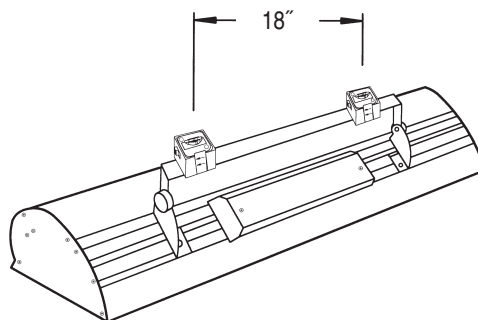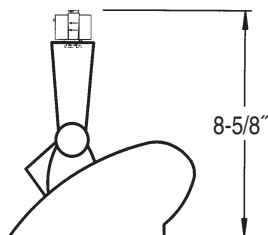


TRACK

Adapters can be supplied for Con-Tech track. The Con-Tech track adapters are U.L. compatible with Juno track. For all other track, adapters must be supplied by others. All 2', 3' and 4' fixtures are provided with two track adapters. 8' fixtures are not available for track mount.

ORDERING: Add **-TK** to catalog number.

Sample: **240 BXWW-SY-TK**

CANOPY & STEM MOUNT

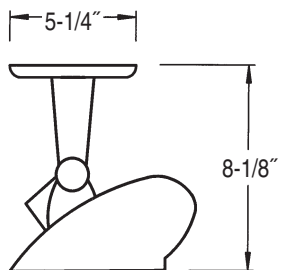


CANOPY

Supplied with hardware to mount directly to a J-Box. The 2', 3', 4' and 8' fixtures are supplied with two.

ORDERING: Add **-CY** to catalog number.

Sample: **140 BXWW-SY-CY**

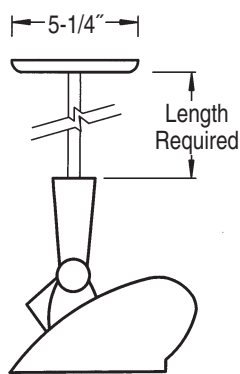


CANOPY with STEM

Supplied with hardware to mount directly to a J-Box. Stems are standardly provided from 1' to 10' as required. The 2', 3', 4' and 8' fixtures are provided with two.

ORDERING: Add **-CS (length required)** to catalog number.

Sample: **240 BXWW-SY-CS4**

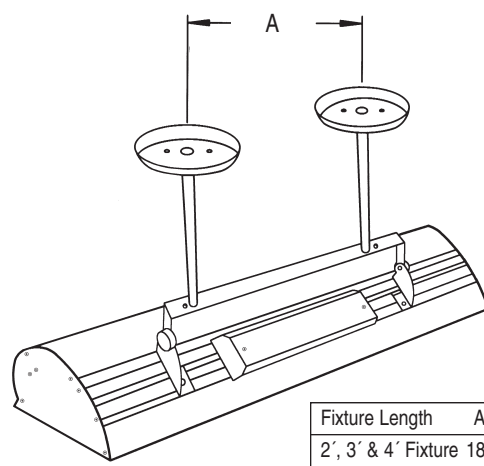

Fixture Length	A
2', 3' & 4' Fixture	18"
8' Fixture	42-5/8"



ADDITIONAL MOUNTING OPTIONS



WALL BRACKET

Supplied in 24" length standardly.
Cantilevers the fixture away from the wall that you intend to light.

ORDERING:

Add **-WB** to catalog number.

Sample: **140 BXWW-SY-WB**

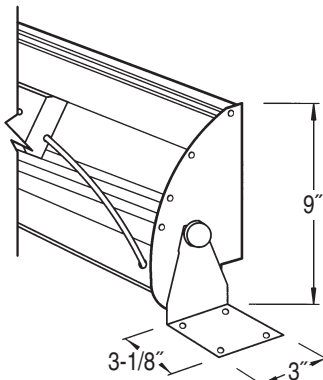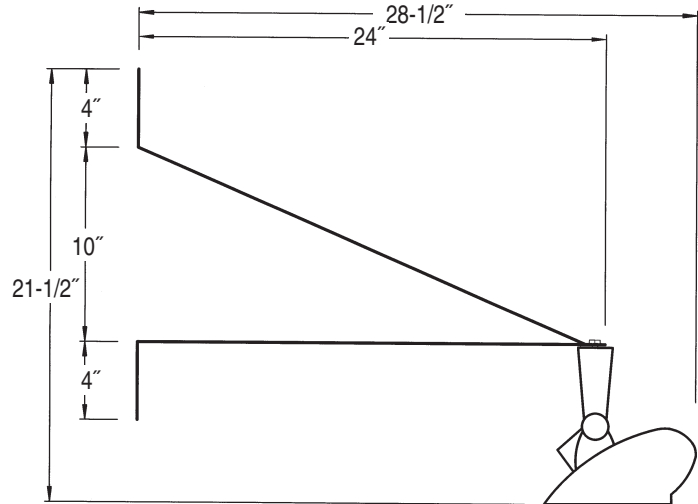


BRACKET MOUNT

Supplied to stand the fixture up and mount to the surface.

ORDERING:

Add **-BK** to catalog number.

Sample: **140 BXWW-SY-BK**

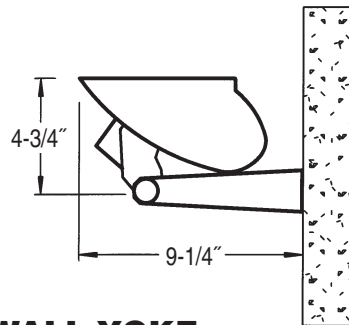


WALL YOKE

Supplied to mount the fixture directly to the wall and aim the light indirectly into the room.

ORDERING:

Add **-WY** to catalog number.

Sample: **140 BXWW-SY-WY**

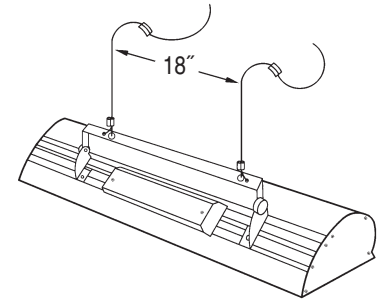


CABLE MOUNT

Supplied with four copper crimps for permanent mounting height. Specify length in feet.

ORDERING:

Add **-CB (length)** to number.


Sample: **140 BXWW-SY-CB4**

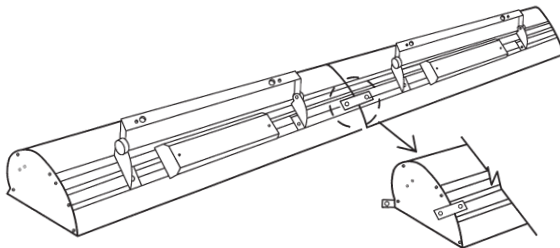

JOINER BRACKETS

Are available to attach fixtures together if they are being mounted in a continuous line. Provide row configuration.

ORDERING: Provided in sets of two.
Sample: **BK-M-SY-JOIN**

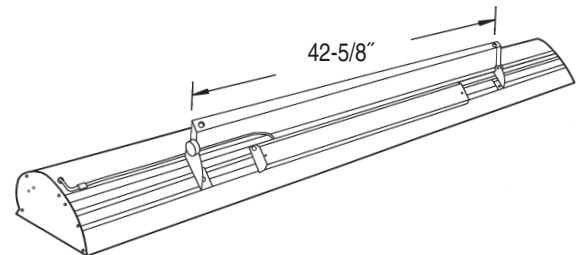

EIGHT FOOT FIXTURES

Are standardly provided with 4' yoke with mounting holes at each end. One ballast box is centered under the yoke. The 8' fixtures may not be mounted directly to a track because of their weight.