
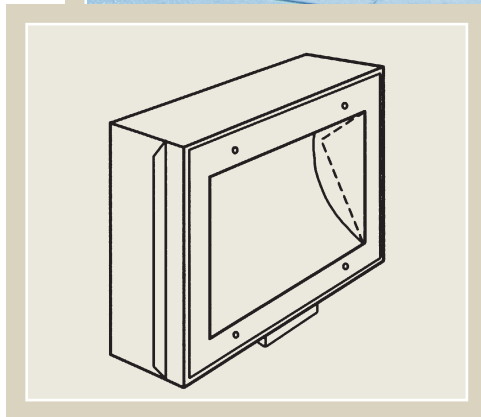



**ELP**

ENGINEERED LIGHTING  
PRODUCTS

**Now with  
LED options!**

RECESSED Exterior or Concrete Pour  
Low Level Floodlight



*Ideal placement is  
18" to 36" from the  
bottom edge of fixture  
to the ground.*

Project  
The Colony  
Newport Beach, California

Specifier  
LDB Inc.  
Tustin, California

Photographer  
Mark Dell'Aquila  
Long Beach, California

Lighting  
126QDCP, 26 watts

## System

Wet Location low level floodlights. Shallow recess depth (4") allows easy incorporation into exterior walls. Their unique Regress Lens design provides very low brightness. LED or fluorescent lamps combined with the high purity aluminum reflector system provides high light levels with low energy.



**TYPE:**  
**CATALOG #:**  
**JOB:**

**RECESSED Exterior or Concrete Pour  
 Low Level Floodlight**

**Specifications**

Recessed wet location low level floodlight with LED; one or two compact fluorescent; or T-8 lamps. Fixture recess is 4" deep. The one piece, formed reflector is high purity aluminum (99.9%) with 97% reflectance. Combined with LED or fluorescent lamps, the reflector system provides high light levels with low energy.

Housing is made of 18 gauge electro-plated galvanized steel, which is TGIC polyester powder coated and suitable for recessed exterior or concrete pour. Formed aluminum face plate attaches with screws and recesses in the housing to mount flush with the finish surface. The face plate has a gasketed 3/16" acrylic regressed lens in most models. The regressed lens design provides very low brightness. Attached J-box suitable for through wiring. All fixtures are supplied standard with Luminaire Disconnect.

UL/CUL Wet Location and concrete pour listed.  
 c/CSA/us Wet Location & concrete pour Listed. ◆

**Options**

Ballast Low Temp 120 or 277 HPF (Standard)

LED Driver 120-277 volt ◆

LED Color 3000K (Standard) ◆  
 3500K -35 ◆  
 4000K -40 ◆

Finish Black (Standard)

Frame Bronze -BZ  
 Custom -Custom

Fixture Electro-Plated Galvanized Steel (Standard)  
 Stainless Steel -SS



Lens Supplied Standard as shown:  
 ① Regressed Acrylic (Some Models)  
 ② Regressed Polycarbonate -LEX (Some Models)  
 ③ Flat Acrylic -FL (Some Models)  
 ④ Flat Polycarbonate -FL-LEX (Available All Models)  
 ⑤ Flat Tempered Glass -TGL (Available All Models)

Reflector Diffuse Silver 97 (Standard)  
 Stepped Diffuse Silver -ST

NOTE: Sylvania provides a 5-year warranty on the lamp/driver combination for LED units. LEDs are rated up to 60,000 hours life.

Note: CP Series fixtures project less than 2% of fixture lumens higher than 90 degrees from nadir (straight down) and in Zones LZ2 thru LZ4 can contribute to:

**LEED Sustainable Site Credit 8:  
 Light Pollution Reduction – 1 point**

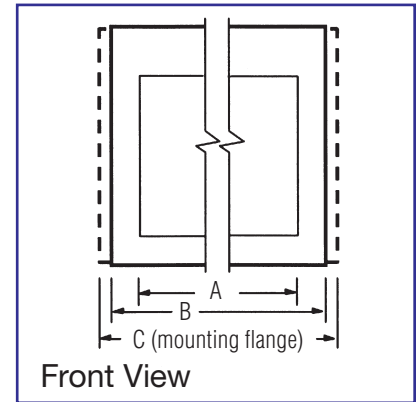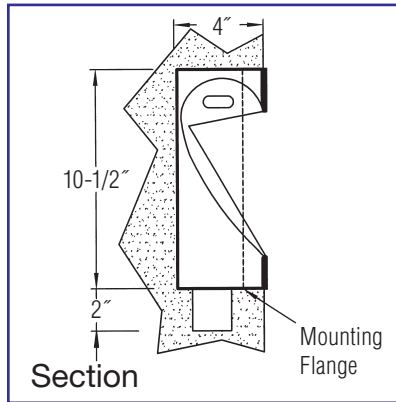

Model No.	A	B	C	Standard Lens/Optional Lens		Lamp
111W1CP ◆	7-7/8"	10-7/8"	11-3/4"	①	②③④⑤	11 watt White LED
113PLCP	7-7/8"	10-7/8"	11-3/4"	①	②③④⑤	13 watt PL
118QDCP	7-7/8"	10-7/8"	11-3/4"	①	②③④⑤	18 watt Quad
126QDCP-LEX	7-7/8"	10-7/8"	11-3/4"	②	④⑤	26 watt Quad
126TTCP-LEX	7-7/8"	10-7/8"	11-3/4"	②	④⑤	26 watt Triple Tube
132TTCP-LEX	7-7/8"	10-7/8"	11-3/4"	②	④⑤	32 watt Triple Tube
142TTCP-FL-LEX	7-7/8"	10-7/8"	11-3/4"	④	⑤	42 watt Triple Tube
213PLCP	15-7/8"	19"	20"	①	②③④⑤	(2) 13 watt PL
226QDCP-LEX	15-7/8"	19"	20"	②	④⑤	(2) 26 watt Quad
226TTCP-LEX	15-7/8"	19"	20"	②	④⑤	(2) 26 watt Triple Tube
232TTCP-LEX	15-7/8"	19"	20"	②	④⑤	(2) 32 watt Triple Tube
242TTCP-FL-LEX	15-7/8"	19"	20"	④	⑤	(2) 42 watt Triple Tube
139BXCP	15-7/8"	19"	20"	①	②③④⑤	39 watt Biax
222W1CP ◆	22-1/4"	25-3/8"	26-3/8"	①	②③④⑤	(2) 11 watt White LED
140BXCP	22-1/4"	25-3/8"	26-3/8"	①	②③④⑤	40 watt Biax
150BXCP	22-1/4"	25-3/8"	26-3/8"	①	②③④⑤	50 watt Biax
155BXCP	22-1/4"	25-3/8"	26-3/8"	①	②③④⑤	55 watt Biax
124T-5CP *	22-1/4"	25-3/8"	26-3/8"	①	②③④⑤	24 watt T-5 HO
117T-8CP	22-1/4"	25-3/8"	26-3/8"	①	②③④⑤	17 watt T-8
240BXCP	44-1/4"	48"	49"	①	②③④⑤	(2) 40 watt Biax
250BXCP	44-1/4"	48"	49"	①	②③④⑤	(2) 50 watt Biax
255BXCP	44-1/4"	48"	49"	①	②③④⑤	(2) 55 watt Biax
154T-5CP *	44-1/4"	48"	49"	②	④⑤	54 watt T-5 HO
132T-8CP	44-1/4"	48"	49"	①	②③④⑤	32 watt T-8

\* Standard T-5 lamps are available: for 2' fixture, change the Model # "24" to "14"; for 4' fixture, change "54" to "28"

NOTE: All fixtures use electronic ballast/driver with -20° starting temperature.

