
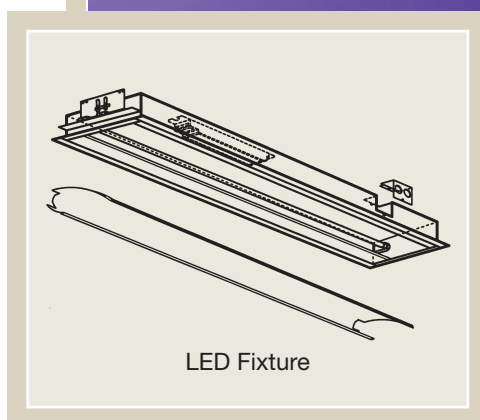



ELP

ENGINEERED LIGHTING
PRODUCTS

MP & MPTB SERIES

RECESSED T-5 Wall Washer
For Drywall and T-Bar



*Ideal placement is
24" to 36" from the front
edge of fixture to the
surface you are lighting,
for 8' to 12' ceilings.*

System

Miniature profile, high performance wall wash fixtures with exceptional lamp shielding. The shallow (3" max.) design also allows wall installation in a standard 4" wall to wash the ceiling or floor with light. Formed, high purity aluminum reflectors provide even, unscaloped illumination.



TYPE:
CATALOG #:
JOB:

RECESSED T-5 Wall Washer For Drywall and T-Bar

Specifications

Small, recessed linear wall wash fixture using one or two compact T-5 fluorescent linear lamps in T-Bar or drywall installations. The shallow 2-1/2" or 3" fixture may be recessed into a standard 4" wall to wash the ceiling or floor with light. By lining the "wall recess" with gypsum, the wall installation may also be modified to maintain a one hour fire rating (SEE INSTRUCTIONS). The one piece, formed reflector combines a white diffuse strip with high purity aluminum (99.9%) with 97% reflectance for the (1) lamp and all aluminum for the (2) lamp. It is easily removable without tools for access to the ballast and wiring. Reflector design provides even, unscalloped illumination with complete lamp shielding even when viewed directly beneath the fixture.

TGIC polyester powder coated housing is made of 22 gauge CRS with cover and knock-outs that provide quick wire access to side or back of fixture for through wiring. All fixtures have integral ballasts and are supplied standard with Luminaire Disconnect. Drywall trim is extruded aluminum.

Continuous Mount – If the drywall fixtures are being mounted in a continuous row, add "CC" (if in ceiling) or "CW" (if in wall) to the catalog number and provide row configuration so proper trims may be provided. i.e.: (18) 154T-5WW-MP-CC for (6) 12' rows.

Rough-In Dimension = (Entire length of row, add all "B" lengths + 1/2") x 6-5/8".

Dimensions do not apply to Trimless installations.

UL/CUL Damp Location listed.

U.S. Patent #5,142,459

Options

Ballast 120 or 277 Electronic (Standard)
Dimming (Some models) -DM
Emergency (Some models) -EPP

Finish White (Standard)
Anti-Microbial White -MB
Custom -Custom

Reflectors Diffuse Silver (Standard)
Specular Silver -SP
Painted White -W

(To eliminate a clear lamp image in Up light installations that may occur at certain viewing angles, we suggest you use a White reflector, OR standard reflector with Frosted Mini Lens)

Lens Clear Mini Lens -ML
Lexan Frosted Mini Lens -MLF
Clear Full Lens -FL**†
Frosted Full Lens -FLF**†
Full Face Clear Lens Plate -FFLP** ‡
Full Face Frosted Lens Plate -FFLPF** ‡


Louver Diffuse Silver Parallel Blade -LV
Trimless Gypsum/Drywall Installation -TLD
Plaster Installation -TLP
(See TRIMLESS sheet for dimensions)

Hospital Hospital Grade (Drywall only) -HG
(FFLP Lens; Gasket; Anti-Microbial Paint)


** Full Lens Option is not available for Continuous mount (end to end rows) or T-Bar units.

† Adds 1/8" to overall Length & Width dimensions.

‡ Adds 1" to overall Length & Width dimensions.

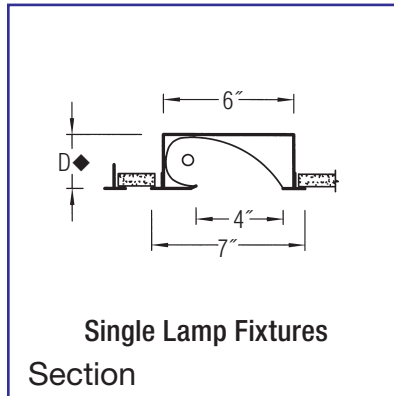


Single Lamp Fixtures
Section

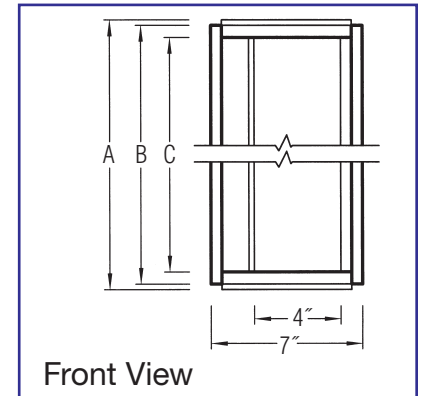


Front View

T-Bar Installations (no trim)

Model No.	A	B	C	D◆	Lamp
114 T-5WW-MPTB	23-13/16"	23-7/16"	22-1/2"	2-1/2"	14 watt T-5
214 T-5WW-MPTB*	23-13/16"	23-7/16"	22-1/2"	3"	(2) 14 watt T-5
124 T-5WW-MPTB	23-13/16"	23-7/16"	22-1/2"	2-1/2"	24 watt T-5 HO
224 T-5WW-MPTB*	23-13/16"	23-7/16"	22-1/2"	3"	(2) 24 watt T-5 HO
128 T-5WW-MPTB	47-13/16"	47-7/16"	46-1/8"	2-1/2"	28 watt T-5
228 T-5WW-MPTB*	47-13/16"	47-7/16"	46-1/8"	3"	(2) 28 watt T-5
154 T-5WW-MPTB	47-13/16"	47-7/16"	46-1/8"	2-1/2"	54 watt T-5 HO
254 T-5WW-MPTB*	47-13/16"	47-7/16"	46-1/8"	3"	(2) 54 watt T-5 HO

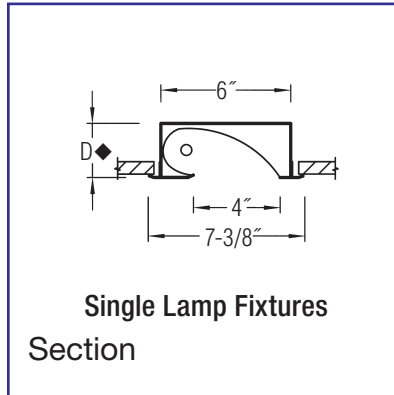

Single Lamp Fixtures
Section

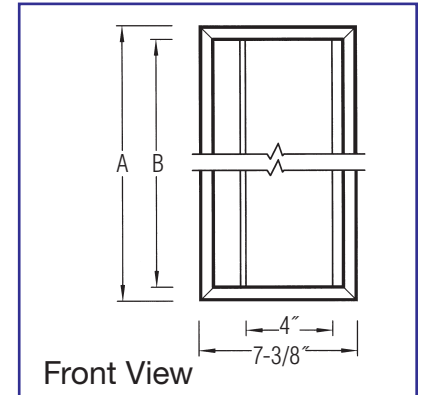

Front View

Drywall Installations

Model No.	A	B	D◆	Rough-In	Lamp
114 T-5WW-MP	23-7/8"	22-1/2"	2-1/2"	6-5/8" x 23"	14 watt T-5
214 T-5WW-MP*	23-7/8"	22-1/2"	3	6-5/8" x 23"	(2) 14 watt T-5
124 T-5WW-MP	23-7/8"	22-1/2"	2-1/2"	6-5/8" x 23"	24 watt T-5 HO
224 T-5WW-MP*	23-7/8"	22-1/2"	3	6-5/8" x 23"	(2) 24 watt T-5 HO
121 T-5WW-MP	35-11/16"	34-5/16"	2-1/2"	6-5/8" x 34-13/16"	21 watt T-5
221 T-5WW-MP*	35-11/16"	34-5/16"	3	6-5/8" x 34-13/16"	(2) 21 watt T-5
139 T-5WW-MP	35-11/16"	34-5/16"	2-1/2"	6-5/8" x 34-13/16"	39 watt T-5 HO
239 T-5WW-MP*	35-11/16"	34-5/16"	3	6-5/8" x 34-13/16"	(2) 39 watt T-5 HO
128 T-5WW-MP	47-1/2"	46-1/8"	2-1/2"	6-5/8" x 46-5/8"	28 watt T-5
228 T-5WW-MP*	47-1/2"	46-1/8"	3	6-5/8" x 46-5/8"	(2) 28 watt T-5
154 T-5WW-MP	47-1/2"	46-1/8"	2-1/2"	6-5/8" x 46-5/8"	54 watt T-5 HO
254 T-5WW-MP*	47-1/2"	46-1/8"	3	6-5/8" x 46-5/8"	(2) 54 watt T-5 HO

* Double lamp fixtures. ◆ 6" Ht. when provided in continuous row with AAM, AAMTB, DL or DLTB Series.