INNOVATIVE HEALTHCARE LIGHTING



Because Hospital Lighting Should Be *Hospitable*



SOOTHING, PATIENT-FRIENDLY SPACES WITH EFFICIENT & EFFECTIVE LED & FLUORESCENT LIGHTING

Cove Lighting creates comfortable, indirect illumination without the glare and sterile feel of standard commercial down lights. ELP offers a variety of fixtures for different size coves with the CL Series, CLLP Series and CLM Series. Additionally, the CLC Series provides a complete cove lighting system which includes the decorative cove.





Indirect Lighting fills corridors with volumes of light. Our shallow metal wall wash fixtures, the AK and MP Series, fit in a standard stud wall (even with 1 hour fire rating!). Even less obtrusive, our unique "cast" GRG products like the HITW Series (Hole In The Wall) become part of the wall when installed and look like a custom-built light niche.

Floor Wash and Night Lighting safely lights your way. Shallow AK, HITW, Mini and

Shallow AK, HITW, Mini and the new miniature, LS Series can recess into a standard wall (even with 1 hour fire rating!)



LS Series Trimless









Light Levels on the Floor: 132T-8WW-AK, 9' Ht., 2'-6" from the wall, .8 LLF Typical -

6'

50' —

Recessed and Surface Mount Wall Wash Fixtures from ELP:

A6 & A9 Series; AK, AKTB & AKS Series; AWW, AWWTB & AWS Series; DW; DWTB & DWS Series; IW, IWTB & IWS Series; Maxi, Maxi-TB & Maxi-S Series; Mini Series; MP, MPTB & MPS Series; SC & SY Series

EXTERIOR SPACES LOW WATTAGE – HIGH PERFORMANCE


Very shallow recessed and surface mount fixtures allow easy incorporation into structures and walls. All LEDs are supplied standard with -20° drivers while fluorescents are standard with -30° ballasts.

Specifically designed for LED, the new miniature LS-EX & LS-EXS Series fixtures are only 3" deep and provide a powerful punch of light.



LS-EXS Series



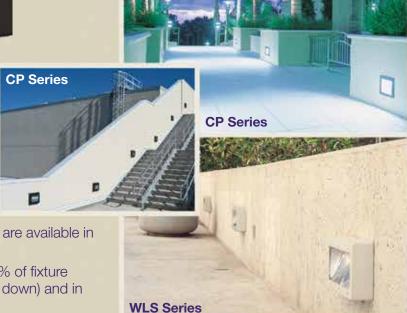


The CP & WLS Series have a shallow 4" depth and are available in both LED and fluorescent.

Note: CP & WLS Series fixtures project less than 2% of fixture lumens higher than 90 degrees from nadir (straight down) and in Zones LZ2 thru LZ4 can contribute to:

LEED Sustainable Site Credit 8: Light Pollution Reduction – 1 point

Exterior, Wet Location Fixtures: (Recessed and Surface Mount)
Imagine, lighting 320 sq. ft. to over 1.8 F.C. average with only (3) 13 watt fixtures!

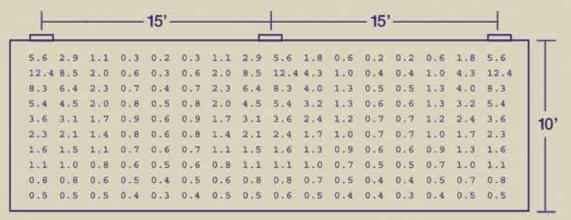

Light levels shown: 113PLCP or 113 PLWLS, 2'-6" Height to Lamp, .8 LLF



10768 Lower Azusa Road El Monte, CA 91731

Phone: 626-579-0943 Fax: 626-579-6803

E-mail: contact@elplighting.com Web: www.elplighting.com Our team of certified lighting designers can show you how ELP products can make your next project extraordinary!

Give us a call at 626-579-0943.