




HITW LED *EXTERIOR*

HIGH OUTPUT SERIES

Recessed Exterior LED fixture . The cast fixture houses an electrical box holding the electrical components and LEDs Fiberglass Plaster Casting is secured to the electro-plated galvanized steel fixture back box and an 18 gauge electro-plated galvanized steel frame with lens and silicone gaskets seal the electrical compartment. Frame, electrical box, and fixture back box with knock-out for wiring are post painted white with a TGIC polyester powder coat. Composite casting is water and high impact resistant. Use "Weld-crete" to finish surface to match exterior stucco. CSA Wet Location & Concrete Pour Listed. IC rated

Model Number	Opening	Watts	LUMENS
29W1-HITW-EX-8X8-HO	8"x 8"	9	595
311W1-HITW-6X13-HO	6"x13"	11	750
413W1-HITW-6x13-HO	6"x13"	13	904

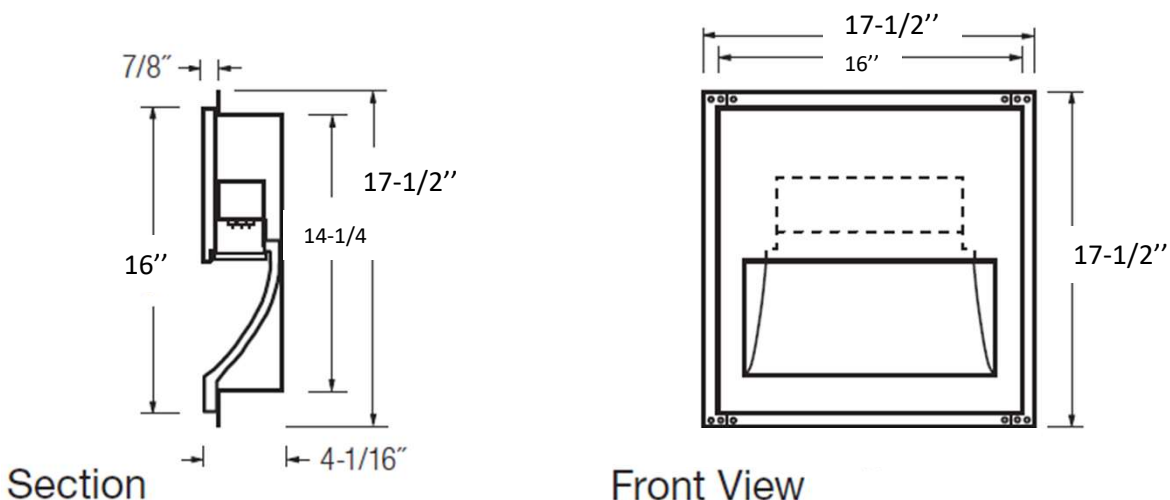

DRIVER	standard
Multi-Dim ELV / Triac / 0-10v IP65	120-277v

LED OPTIONS

eldoLED®

LED (MUST SPECIFY)	ADD TO MODEL NUMBER
2700K	-27K
3000K	-30K
3500K	-35K
4000K	-40K
5000K	-50K
90 CRI ANY COLOR	-90 CRI

Trimless/ Recessed Hole In The Wall EXTERIOR Niche for Stucco or Concrete



NOTE: Please do not specify or try to install this product without clear understanding of the installation instructions.