



ENGINEERED LIGHTING PRODUCTS






## LED Recessed Wall Washer for Plaster or Drywall

Shallow, high performance LED wall wash fixture with exceptional shielding. The patented\* indirect design shields the LED from view at any angle. The shallow 3-1/2" housing also allows wall installation in a standard 4" wall to wash the ceiling or floor with light. High purity aluminum reflectors provide even illumination with no glare.

U.S. Patent #9,726,337

Base Model #	"A" dim	"B" dim	Rough-in 9-1/8"x	Watts	Fixture lumens @35K
111W1WW-AK1	13-3/8"	12"	12-1/2"	11	1730
222W1WW-AK1	13-3/8"	12"	12-1/2"	22	3431
222W1WW-AK2	24-5/16"	22-15/16"	23-1/2"	22	3431
444W1WW-AK2	24-5/16"	22-15/16"	23-1/2"	44	6862
333W1WW-AK3	37-3/8"	36"	36-1/2"	33	5146
666W1WW-AK3	37-3/8"	36"	36-1/2"	66	10293
444W1WW-AK4	48-5/16"	46-15/16"	47-1/2"	44	6862
888W1WW-AK4	48-5/16"	46-15/16"	47-1/2"	88	13723

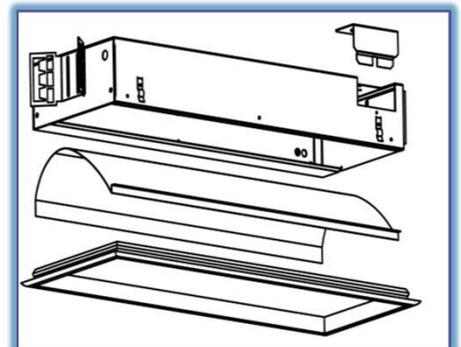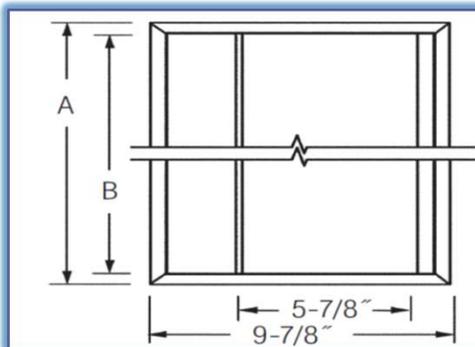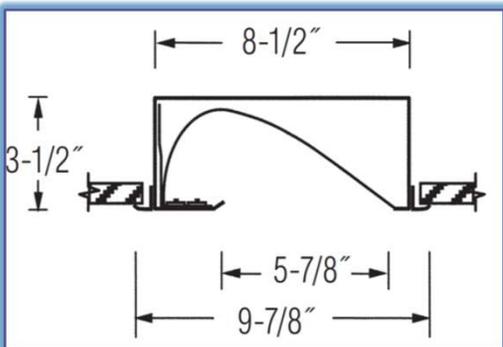

For *Continuous Runs*: Rough-In Dimensions = Entire length of row, add all "B" lengths + 1/2" x 9-1/8 wide"  
 For *Trimless Drywall and Plaster* refer to the AK Trimless spec sheet

Custom Sizes Available. Please Contact Factory

10768 LOWER AZUSA ROAD EL MONTE, CA 91731 PHONE: 626.579.0943 WEBSITE: [www.elplighting.com](http://www.elplighting.com)

**STANDARD FEATURES:**

Driver: 120/277 0-10v EldoLed Optotronic 1% dim

Finish: White Semi-Gloss Powder Coat

Reflector: Diffuse Silver 97%

c/CSA/us Damp Location Listed. IC Rated

Made in the USA • U.S. Patent #9,726,337

eldoLED

5-year warranty  
on LED drivers  
and LED modules**AVAILABLE OPTIONS:**

<b>DIMMING (0-10v 1% is standard) 120-277v</b>	<b>ADD TO MODEL NUMBER</b>
3-wire Lutron L3D Hi-Lume 1% Ecosystem	-DM6
*2-wire phase, Lutron LTE Hi-Lume 1% (120 Volt Only) *limited stock	-DM7
Digital, Lutron LDE Hi-Lume 1% Ecosystem w/ Soft-On, Fade to Black	-DM8
DMX 512 Integral	-DMX
Dali	-DALI

<b>0-10v PROGRAMMABLE OPTIONS</b>	<b>ADD TO MODEL NUMBER</b>
End of Life Indicator (specify in hours)	-EOL
Soft Start	-SFT
Dim to Off	-DTO

<b>LED Color Temperature (Must Specify)</b>	<b>ADD TO MODEL NUMBER</b>
2700K (standard 90+ CRI)	-27K
3000K 80cri	-30K
3500K 80cri	-35K
4000K 80cri	-40K
5000K 80cri	-50K
90+ CRI (is an option to add to the 30K, 35K, 40K & 50K)	-90CRI
Tunable White	-TW
Dim to Warm	-DTW




<b>FINISH (semi-gloss white is standard)</b>	<b>ADD TO MODEL NUMBER</b>
Anti-Microbial Semi-Gloss White	-MB
Custom Color (Provide RAL#)	-CUSTOM

<b>REFLECTOR ( MIRO Silver 97% is standard)</b>	<b>ADD TO MODEL NUMBER</b>
Matte White Powder Coat*I	-WH

\*To eliminate a clear lamp image in *Up light installations* that may occur at certain viewing angles, we suggest you use a *white reflector, OR standard reflector with frosted mini lens*)

LENS (not required for performance)	ADD TO MODEL NUMBER
Clear Acrylic Mini Lens	-ML
Frosted Acrylic Mini Lens	-MLF
Clear Acrylic Full Lens	-FL
Frosted Acrylic Full Lens	-FLF
Full Face Clear Acrylic Lens Plate Trim	-FFLP
Full Face Frosted Acrylic Lens Plate Trim	-FFLPP

MISCELLANEOUS	ADD TO MODEL NUMBER
Low Lumen Output. Factory Programmed (specify desired lumens)	-LL
Wireless Module	-WLM
*Trimless Gypsum/Drywall	*see Trimless cut sheet
*Trimless Plaster	*see Trimless cut sheet
Hospital Grade includes FFLP Lens, Gaskets & Anti-Microbial Paint	-HG
Fixtures Mounted in a Continuous Row in the Ceiling (specify run lengths)	-CC
Fixtures mounted in a continuous row in a wall (specify run lengths)	-CW
Emergency Power (10 watts / 90 min)	-EPP
Chicago Plenum	-CP
Louver	-LV
347 Voltage	-347V

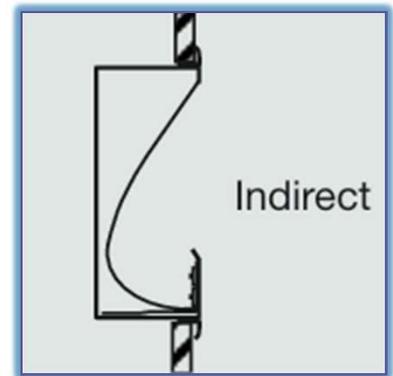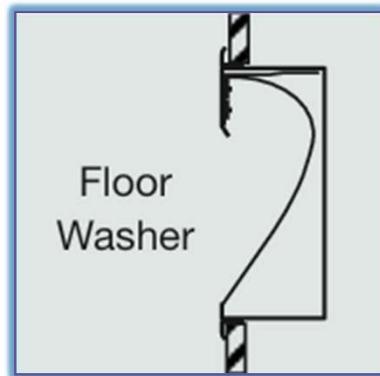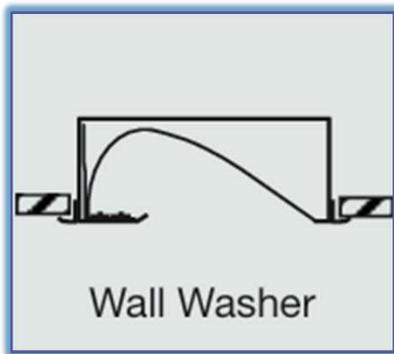

\*if ordered with 90 cri option

UPDATED: March 2026