



# ENGINEERED LIGHTING PRODUCTS



## AK TRIMLESS for Plaster or Drywall

The **TRIMLESS** feature provides the best of both worlds. Minimal intrusion into the architectural space, incorporated with our patented reflector systems for maximum performance. Design allows ceiling/wall finish to end right at the edge of the lighted opening.





Base Model DRYWALL	"A" dim	"B" dim	Rough-in	Watts	Fixture lumens @35K
111W1WW-AK1-TLD	12"	14-1/2"	9"x 15"	11	1505
222W1WW-AK1-TLD	12"	14-1/2"	9"x 15"	22	3010
222W1WW-AK2-TLD	24"	26-1/2"	9"x 27"	22	3010
444W1WW-AK2-TLD	24"	26-1/2"	9"x 27"	44	6019
333W1WW-AK3-TLD	36"	38-1/2"	9"x 39"	33	4514
666W1WW-AK3-TLD	36"	38-1/2"	9"x 39"	66	9029
444W1WW-AK4-TLD	48"	50-1/2"	9"x 51"	44	6019
888W1WW-AK4-TLD	48"	50-1/2"	9"x 51"	88	12038

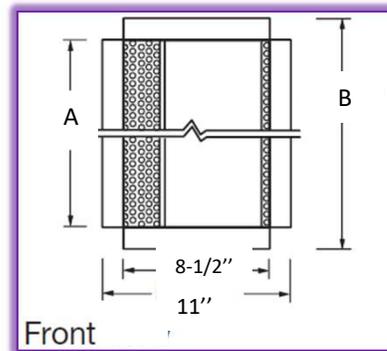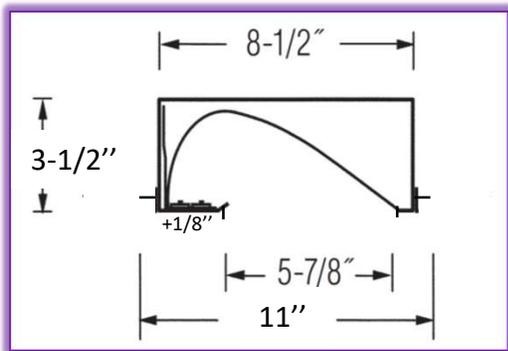

For Continuous Runs: Rough-In Dimensions = Entire length of row, add all "A" lengths +1/2" x 9" wide

**Custom Sizes Available. Please Contact Factory**

Base Model <i>PLASTER</i>	"A" dim	"B" dim	Rough-in	Watts	Fixture lumens @35K
111W1WW-AK1-TLP	12"	14-1/2"	9" x 15"	11	1505
222W1WW-AK1-TLP	12"	14-1/2"	9" x 15"	22	3010
222W1WW-AK2-TLP	24"	26-1/2"	9" x 27"	22	3010
444W1WW-AK2-TLP	24"	26-1/2"	9" x 27"	44	6019
333W1WW-AK3-TLP	36"	38-1/2"	9" x 39"	33	4514
666W1WW-AK3-TLP	36"	38-1/2"	9" x 39"	66	9029
444W1WW-AK4-TLP	48"	50-1/2"	9" x 51"	44	6019
888W1WW-AK4-TLP	48"	50-1/2"	9" x 51"	88	12038

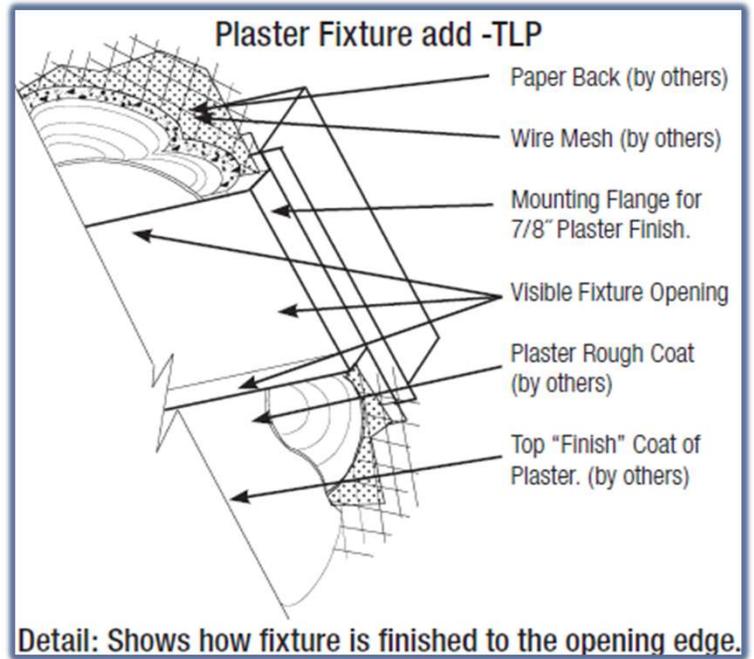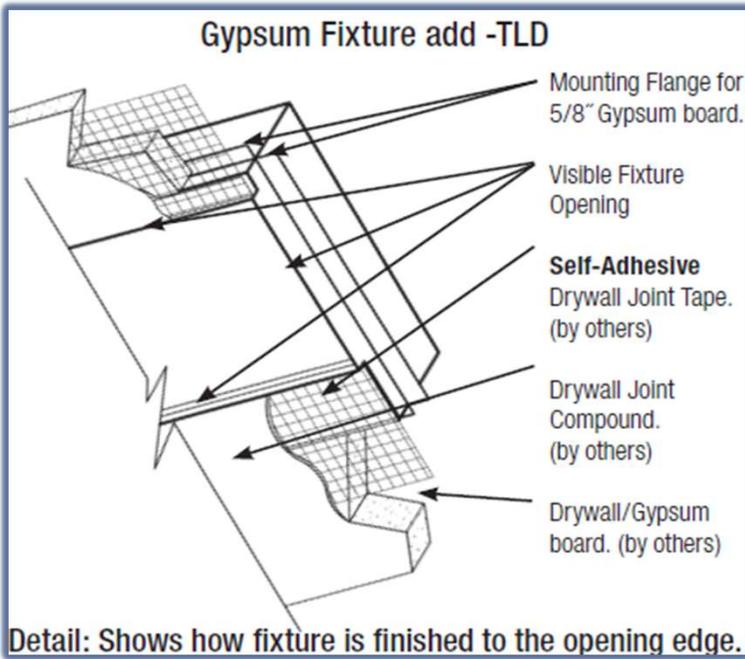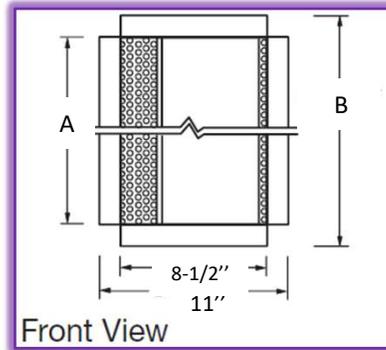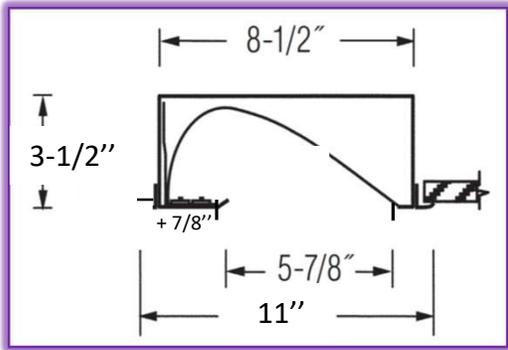

For *Continuous Runs*: Rough-In Dimensions = Entire length of row, add all "A" lengths + 1/2" x 9" wide

**Custom Sizes Available. Please Contact Factory**

10768 LOWER AZUSA ROAD EL MONTE, CA 91731 PHONE: 626.579.0943 WEBSITE: [www.elplighting.com](http://www.elplighting.com)

**STANDARD FEATURES:**

Driver: 120/277 0-10v EldoLed Optotronic 1% dim

Finish: White Semi-Gloss Powder Coat

Reflector: Diffuse Silver 97%

c/CSA/us Damp Location Listed. IC Rated

Made in the USA • U.S. Patent #9,726,337

eldoLED

5-year warranty  
on LED drivers  
and LED modules**AVAILABLE OPTIONS:**

<b>DIMMING (0-10v 1% is standard) 120-277v</b>	<b>ADD TO MODEL NUMBER</b>
3-wire Lutron L3D Hi-Lume 1% Ecosystem	-DM6
*2-wire phase, Lutron LTE Hi-Lume 1% (120 Volt Only) *limited stock	-DM7
Digital, Lutron LDE Hi-Lume 1% Ecosystem w/ Soft-On, Fade to Black	-DM8
DMX 512 Integral	-DMX
Dali	-DALI

<b>0-10v PROGRAMMABLE OPTIONS</b>	<b>ADD TO MODEL NUMBER</b>
End of Life Indicator (specify in hours)	-EOL
Soft Start	-SFT
Dim to Off	-DTO

<b>LED Color Temperature (Must Specify)</b>	<b>ADD TO MODEL NUMBER</b>
2700K (standard 90+ CRI)	-27K
3000K 80cri	-30K
3500K 80cri	-35K
4000K 80cri	-40K
5000K 80cri	-50K
90+ CRI (is an option to add to the 30K, 35K, 40K & 50K)	-90CRI
Tunable White	-TW
Dim to Warm	-DTW

<b>Finish</b>	<b>ADD TO MODEL NUMBER</b>
Anti-Microbial Semi-Gloss White	-MB
Custom Color (Provide RAL#)	-CUSTOM

REFLECTOR ( MIRO Silver 97% is standard)	ADD TO MODEL NUMBER
Matte White Powder Coat	-WH

To eliminate a clear lamp image in *Up light installations that may occur at certain viewing angles, we suggest you use a white reflector, OR standard reflector with frosted mini lens*

LENS (not required for performance)	ADD TO MODEL NUMBER
Clear Acrylic Mini Lens	-ML
Frosted Acrylic Mini Lens	-MLF

MISCELLANEOUS	ADD TO MODEL NUMBER
Low Lumen Output. Factory Programmed (specify desired lumens)	-LL
Wireless Module	-WLM
Emergency Battery Power Pack (10 watts / 90min)	-EPP
Chicago Plenum	-CP
Louver	-LV
347 Voltage	-347V
Continuous Ceiling (specify run lengths)	-CC
Continuous Wall (specify run lengths)	-CW



Individual trim-less in ceiling application



\*if ordered with 90 cri option

UPDATED: March 2026