




ENGINEERED LIGHTING PRODUCTS

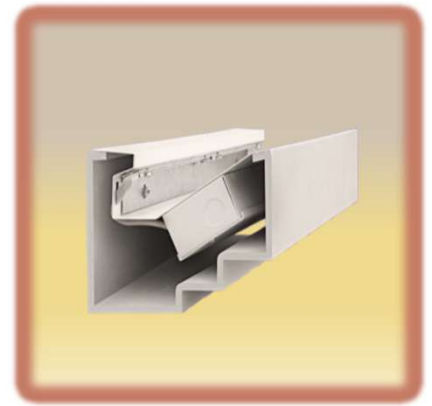

**LED Cove Light COMPLETE SYSTEM**


Wall mounted cast decorative cove of GRG (Glass fiber Reinforced Gypsum) composite material. Cove system combines continuous cast cove with a high-performance lighting component that illuminates the cove while projecting light out of the cove and into the space.

Available in 5" , 8" , or 10" wide

**5" Wide**

Base Model #	Width	Height	LED reflector Length	Watts	Fixture lumens @35K
222W1CLC-E5	5"	4"	23"	22	2578
333W1CLC-E5	5"	4"	34-3/4"	33	3868
444W1CLC-E5	5"	4"	46-1/2"	44	5157

**Style E** (only style currently for 5" wide)

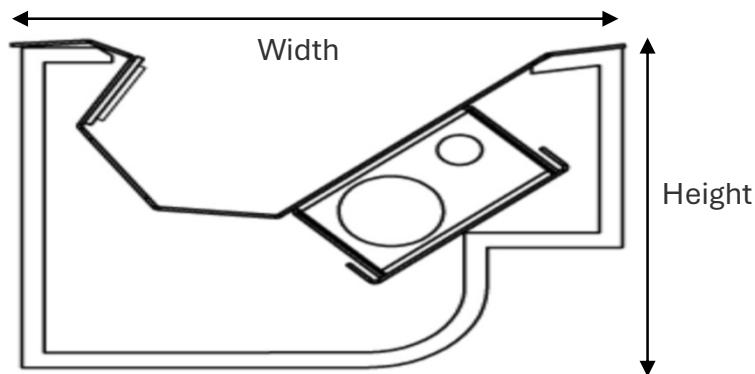


Castings come in 96" lengths and are field cuttable for shorter runs or to cut angles

Also available as custom individual lengths with endcaps





# 8" Wide

Base Model #	Width	Height	LED reflector Length	Watts	Fixture lumens @35K
222W1CLC*-8	7-3/4"	5-1/4"	23"	22	2441
333W1CLC*-8	7-3/4"	5-1/4"	34-3/4"	33	3623
444W1CLC*-8	7-3/4"	5-1/4"	46-1/2"	44	4900

## \*Specify Decorative Style

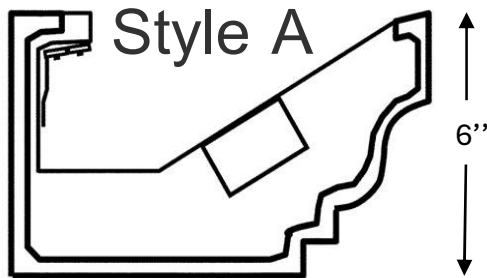

Style "A" height is 6"

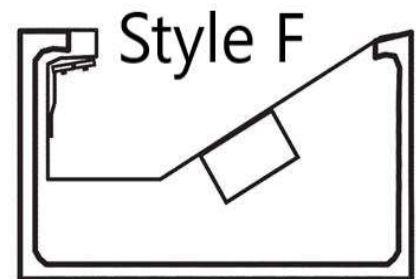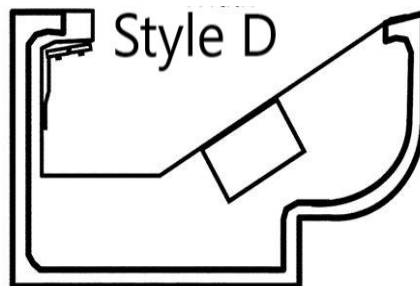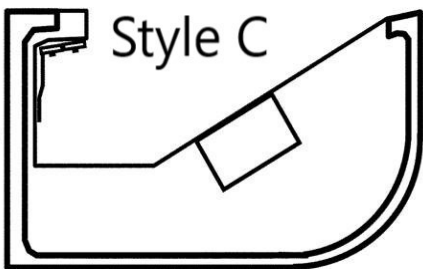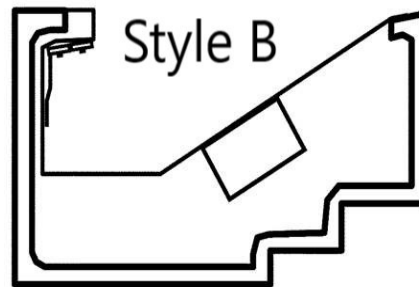

**Castings come in 96" lengths and are field cuttable for shorter runs or to cut angles. 2' x 2' premade 90° inside or outside corners are also available on some styles of 8" and 10" wide**


**Also available as custom individual lengths with endcaps**

# 10" Wide





Base Model #	Width	Height	LED reflector Length	Watts	Fixture lumens @35K
222W1CLC*-10	10"	5-1/4"	23"	22	2214
444W1CLC2*-10	10"	5-1/4"	23"	44	4428
333W1CLC*-10	10"	5-1/4"	34-3/4"	33	3321
666W1CLC3*-10	10"	5-1/4"	34-3/4"	66	6573
444W1CLC*-10	10"	5-1/4"	46-1/2"	44	4428
888W1CLC*-10	10"	5-1/4"	46-1/2"	88	8891

Specify color temperature when ordering. See options page

## \*Specify Decorative Style

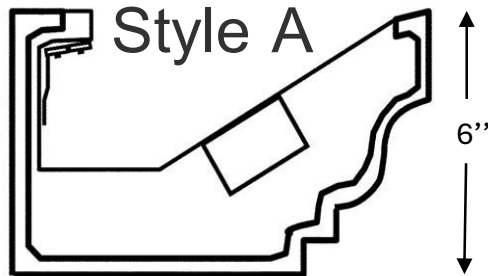

Style "A" height is 6"

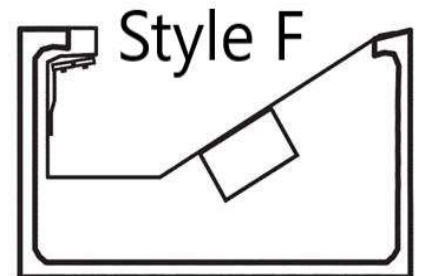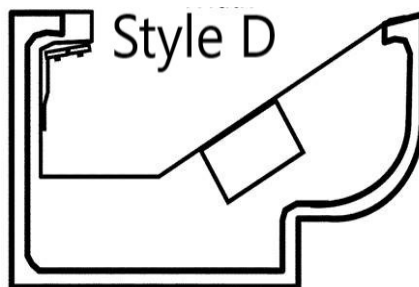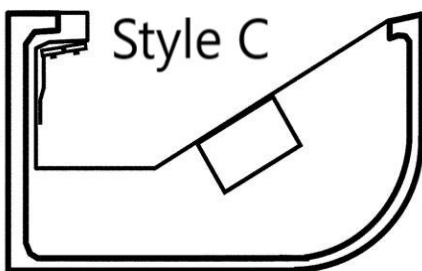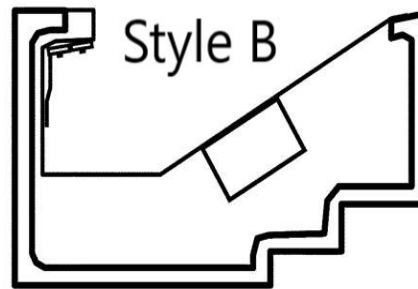

**Castings come in 96" lengths and are field cuttable for shorter runs or to cut angles. 2' x 2' premade 90° inside or outside corners are also available on some styles of 8" and 10" wide**

**Also available as custom individual lengths with endcaps**

### **STANDARD FEATURES:**

**Driver: 120/277 0-10v EldoLed Optotronic 1% dim**

**Finish on casting: Primer and paint done at jobsite**

**Reflector: White Matte Aluminum**

**c/CSA/us Damp Location Listed. IC Rated**

**Made in the USA • U.S. Patent #9,726,337**

### **AVAILABLE OPTIONS:**

<b>DIMMING (0-10v 1% is standard) 120-277v</b>	<b>ADD TO MODEL NUMBER</b>
*3-wire Lutron L3D Hi-Lume 1% Ecosystem	-DM6
*2-wire phase, Lutron LTE Hi-Lume 1% (120 Volt Only) *limited stock	-DM7
Digital, Lutron LDE Hi-Lume 1% Ecosystem w/ Soft-On, Fade to Black	-DM8
DMX 512 Integral	-DMX
Dali	-DALI

<b>PROGRAMMABLE OPTIONS for 0-10v ONLY</b>	<b>ADD TO MODEL NUMBER</b>
End of Life Indicator (specify in hours)	-EOL
Soft Start	-SFT
Dim to Off	-DTO

<b>LED Color Temperature (Must Specify)</b>	<b>ADD TO MODEL NUMBER</b>
2700K (standard 90+ CRI)	-27K
3000K 80cri	-30K
3500K 80cri	-35K
4000K 80cri	-40K
5000K 80cri	-50K
Tunable White 2700K-6500K	-TW
Dim to Warm	-DTW
90+ CRI (option to add to the 30K, 35K, 40K & 50K)	-90CRI

<b>FINISH on Reflector (matte textured white is standard)</b>	<b>ADD TO MODEL NUMBER</b>
Anti-Microbial White	-MB

LENS (not required for performance)	ADD TO MODEL NUMBER
Clear Acrylic Full Lens	-FL
Frosted Acrylic Full Lens	-FLF



MISCELLANEOUS	ADD TO MODEL NUMBER
Custom Lower Lumen Output. Factory Programmed (specify in lumens)	-LL
Individual custom size with end caps	-EC
Emergency Power (3' and 4' models only)	-EPP
Connected Lighting Module (Wireless)	-WLMS



**Continuous run**



**Individual with end caps**

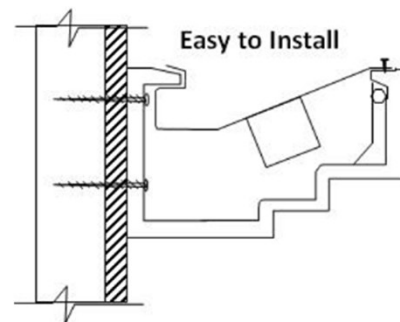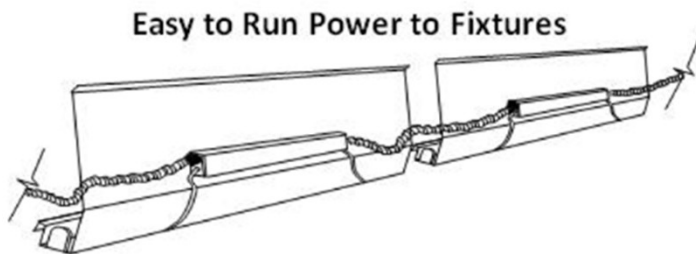

eldoLED

5-year warranty on LED drivers and LED modules



\*if ordered with 90 cri option