





Engineered Lighting Products



LED Wall Washer for **T-Bar** Lay-in

Shallow, high performance LED wall wash fixtures for use in suspended ceiling installations. The indirect design shields the LED from view at any angle. The formed, high purity aluminum reflector design provides even, unscalped illumination with no glare.

Base Model #	"A" dim	"B" dim	Watts	Fixture lumens @35K
222W1WW-AKTB2	23-7/8"	23-7/16"	22	3010
444W1WW-AKTB2	23-7/8"	23-7/16"	44	6019
444W1WW-AKTB4	47-7/8"	47-7/16"	44	6019
888W1WW-AKTB4	47-7/8"	47-7/16"	88	12038

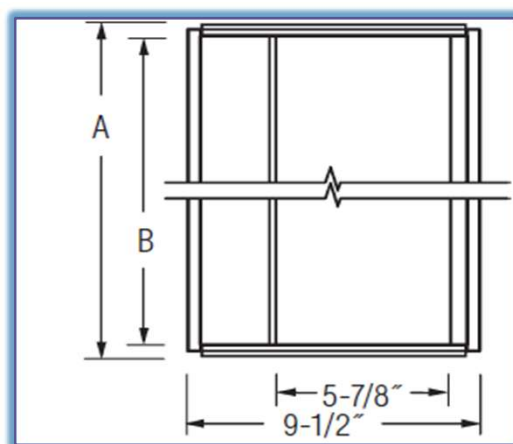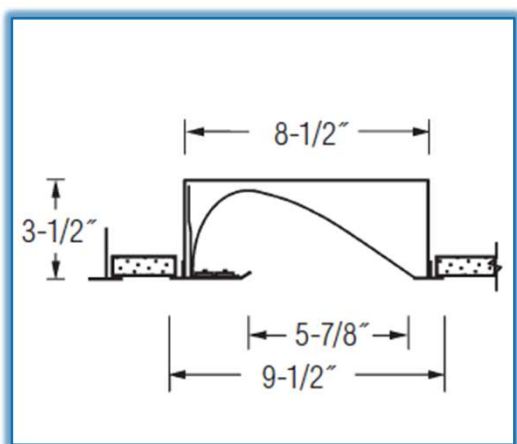

Custom Tbar Trim Available. Please Contact Factory

STANDARD FEATURES:**Driver: 120/277 0-10v EldoLed Optotronic 1% dim****Finish: White Semi-Gloss Powder Coat****Reflector: Diffuse Silver 97%****c/CSA/us Damp Location Listed. IC Rated****Made in the USA • U.S. Patent #9,726,337****eldoLED****5-year warranty
on LED drivers
and LED modules****AVAILABLE OPTIONS:**

DIMMING (0-10v 1% is standard) 120-277v	ADD TO MODEL NUMBER
3-wire Lutron L3D Hi-Lume 1% Ecosystem	-DM6
*2-wire phase, Lutron LTE Hi-Lume 1% (120 Volt Only) *limited stock	-DM7
Digital, Lutron LDE Hi-Lume 1% Ecosystem w/ Soft-On, Fade to Black	-DM8
DMX 512 Integral	-DMX
Dali	-DALI

0-10v PROGRAMMABLE OPTIONS	ADD TO MODEL NUMBER
End of Life Indicator (specify in hours)	-EOL
Soft Start	-SFT
Dim to Off	-DTO

LED Color Temperature (Must Specify)	ADD TO MODEL NUMBER
2700K (standard 90+ CRI)	-27K
3000K 80cri	-30K
3500K 80cri	-35K
4000K 80cri	-40K
5000K 80cri	-50K
90+ CRI (is an option to add to the 30K, 35K, 40K & 50K)	-90CRI
Tunable White (2700K-6500K)	-TW
Dim to Warm	-DTW

Finish	ADD TO MODEL NUMBER
Anti-Microbial Semi-Gloss White	-MB
Custom Color (Provide RAL#)	-CUSTOM

REFLECTOR (MIRO Silver 97% is standard)	ADD TO MODEL NUMBER
Matte White Powder Coat	-WH
LENS (not required for performance)	ADD TO MODEL NUMBER
Clear Acrylic Mini Lens	-ML
Frosted Acrylic Mini Lens	-MLF
MISCELLANEOUS	ADD TO MODEL NUMBER
Low Lumen Output. Factory Programmed (specify desired lumens)	-LL
Wireless Module	-WLM
Emergency Battery Power Pack (10 watts / 90min)	-EPP
Chicago Plenum	-CP
Louver	-LV
347 Voltage	-347V
45° Mounting (on 2' models)	-45



2' AK in Tbar Grid



UPDATED: July 2026

10768 LOWER AZUSA ROAD EL MONTE, CA 91731 PHONE: 626.579.0943 WEBSITE: www.elplighting.com