

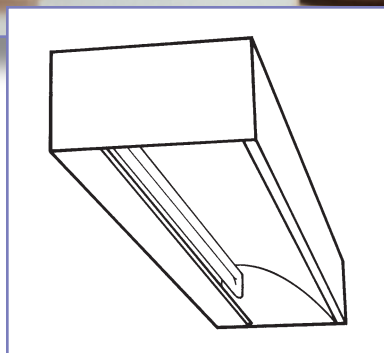



**ENGINEERED
LIGHTING PRODUCTS**



AKS SERIES

SURFACE Mount Wall Washer



Project

Security Industrial
El Monte, California

Specifier

R.W. Swarens Associates
El Monte, California

Photographer

Robin A. Higgin
South Pasadena, California

Lighting

240 BXWW-AKS, 80 watts

*Ideal placement is
24" to 36" from the
front edge of fixture
to the surface you
are lighting.*



TYPE:
CATALOG #:
JOB:

AKS SERIES

SURFACE Mount Wall Washer

SYSTEM

Surface mounted compact fluorescent wall washer with formed aluminum reflector that provides even unscalped illumination with no glare and offers exceptional lamp shielding. UL/CUL Damp Location listed.

U.S. Patent #5,142,459


SPECIFICATIONS

Surface mount fluorescent wall washer for use with T-5, T-8 or Biax lamps. All fixtures are 3-1/2" deep with the exception of the double lamp T-8 fixtures, which are 5". Both have integral ballast. The one piece, formed reflector is high purity aluminum (99.9%) with 95% reflectance. It is easily removable without tools for access to the ballast and wiring. Reflector design provides complete lamp shielding even when viewed directly beneath fixture.

TGIC polyester powder-coated housing is made of 22 gauge CRS with cover and knock-outs for through wiring.


OPTIONS

Ballast	120 HPF Electronic (Standard) 277 HPF Electronic Dimming (Some models) -DM Emergency (Some models) -EPP Magnetic -MG
Finish	White (Standard) Custom -Custom
Reflectors	Diffuse Silver (Standard) Specular Silver -SP Stepped Diffuse Silver -ST Painted White -W
Lens	Mini Lens -ML
Louver	Parallel Blade Louver -LV
Glare Shield	Suggested for Wall Mounted -GS Up-light installations. (N/A for 2 lamp T-8)
Mounting	Surface J-Box (Standard) Canopy w/Stem -CS (FT of Stem) ex. 240 BXWW-AKS-CS4




(Not for 2 lamp T-8)†

Section



Front View

Model No.	A	Lamp
118 BXWW-AK S	12"	18 watt Biax
139 BXWW-AK S	18"	39 watt Biax
140 BXWW-AK S	24"	40 watt Biax
150 BXWW-AK S*	24"	50 watt Biax
155 BXWW-AK S*	24"	55 watt Biax
239 BXWW-AK S	36"	(2) 39 watt Biax
240 BXWW-AK S	48"	(2) 40 watt Biax
250 BXWW-AK S*	48"	(2) 50 watt Biax
255 BXWW-AK S*	48"	(2) 55 watt Biax
114 T-5WW-AK S*	24"	14 watt T-5
214 T-5WW-AK S*	24"	(2) 14 watt T-5
124 T-5WW-AK S*	24"	24 watt T-5 HO
224 T-5WW-AK S*	24"	(2) 24 watt T-5 HO
121 T-5WW-AK S*	36"	21 watt T-5
221 T-5WW-AK S*	36"	(2) 21 watt T-5
139 T-5WW-AK S*	36"	39 watt T-5 HO
239 T-5WW-AK S*	36"	(2) 39 watt T-5 HO
128 T-5WW-AK S*	48"	28 watt T-5
228 T-5WW-AK S*	48"	(2) 28 watt T-5
154 T-5WW-AK S*	48"	54 watt T-5 HO
254 T-5WW-AK S*	48"	(2) 54 watt T-5 HO
117 T-8WW-AK S	24"	17 watt T-8
125 T-8WW-AK S	36"	25 watt T-8
132 T-8WW-AK S	48"	32 watt T-8
217 T-8WW-AK S†	24"	(2) 17 watt T-8
225 T-8WW-AK S†	36"	(2) 25 watt T-8
232 T-8WW-AK S†	48"	(2) 32 watt T-8

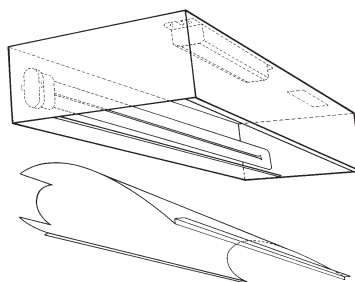

† T-8 Double lamp housing is 10"W x 5"Ht.
* Magnetic ballast not available.