

**ENGINEERED  
LIGHTING PRODUCTS**



# ***CLM SERIES***

*SURFACE Mount Mini Cove Light*




**Project**  
Maines Residence  
Santa Clarita, California

**Specifier**  
Lauri Maines, LC  
El Monte, California

**Photographer**  
Mark Dell'Aquila  
Long Beach, California

**Lighting**  
132T-8CLM, 32 watts  
Cove Light

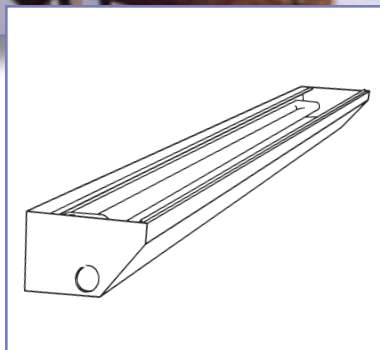

*Ideal mini cove  
light for a narrow  
or pre-fabricated  
cove.*



TYPE:  
CATALOG #:  
JOB:

# CLM SERIES

*SURFACE Mount Mini Cove Light*

## SYSTEM

Surface mounted mini cove light using compact fluorescent lamps. Mini fixture is made to lay directly into a narrow or pre-fabricated cove. Reflector design illuminates cove and minimizes socket shadows while projecting light out of the cove and into the space.

UL/CUL Damp Location listed.

**U.S. Patent #5,142,459**


## SPECIFICATIONS

Mini surface mounted fluorescent cove light for use with Biax, T-5 and T-8 lamps. The fixture is 2-3/4" deep with ballast mounted in the housing. The one piece, formed reflector is TGIC polyester powder coated in matte white and is easily removable without tools for access to ballast and wiring. White reflector design illuminates the cove and minimizes unsightly socket shadows while projecting light out of the cove and into the space.

TGIC polyester powder coated housing is made of 22 gauge CRS with knock-outs provided at the end of fixture to allow for through wiring. Surface wall mount unit with knock-outs on the back may be ordered by adding "SW" to the catalog number.

## OPTIONS

|          |                                 |
|----------|---------------------------------|
| Ballast  | 120 Electronic (Standard)       |
|          | 277 Electronic                  |
|          | Dimming (Some models) -DM       |
|          | Emergency (Some models) -EPP    |
| Finish   | White (Standard)                |
|          | Custom (For Wall Mount) -Custom |
| Mounting | Surface Mount (Standard)        |
|          | Surface Wall Mount -SW          |
| Lens     | Full Lens -FL                   |



Section



Front View

| Model No.   | A        | Lamp             |
|-------------|----------|------------------|
| 118 BXCLM*  | 12"      | 18 watt Biax     |
| 140 BXCLM*  | 24"      | 40 watt Biax     |
| 150 BXCLM*  | 24"      | 50 watt Biax     |
| 155 BXCLM*  | 24"      | 55 watt Biax     |
| 240 BXCLM*  | 48"      | (2) 40 watt Biax |
| 250 BXCLM*  | 48"      | (2) 50 watt Biax |
| 255 BXCLM*  | 48"      | (2) 55 watt Biax |
| 114 T-5CLM* | 22-1/2"  | 14 watt T-5      |
| 124 T-5CLM* | 22-1/2"  | 24 watt T-5 HO   |
| 121 T-5CLM* | 34-5/16" | 21 watt T-5      |
| 139 T-5CLM* | 34-5/16" | 39 watt T-5 HO   |
| 128 T-5CLM* | 46-1/8"  | 28 watt T-5      |
| 154 T-5CLM* | 46-1/8"  | 54 watt T-5 HO   |
| 117 T-8CLM* | 24"      | 17 watt T-8      |
| 125 T-8CLM* | 36"      | 25 watt T-8      |
| 132 T-8CLM* | 48"      | 32 watt T-8      |

\* Magnetic ballast not available.

