

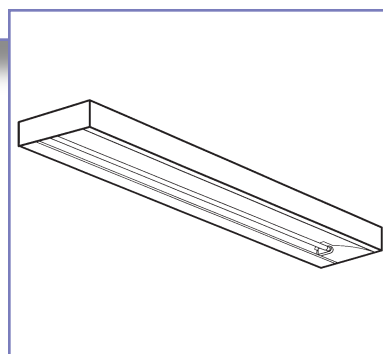
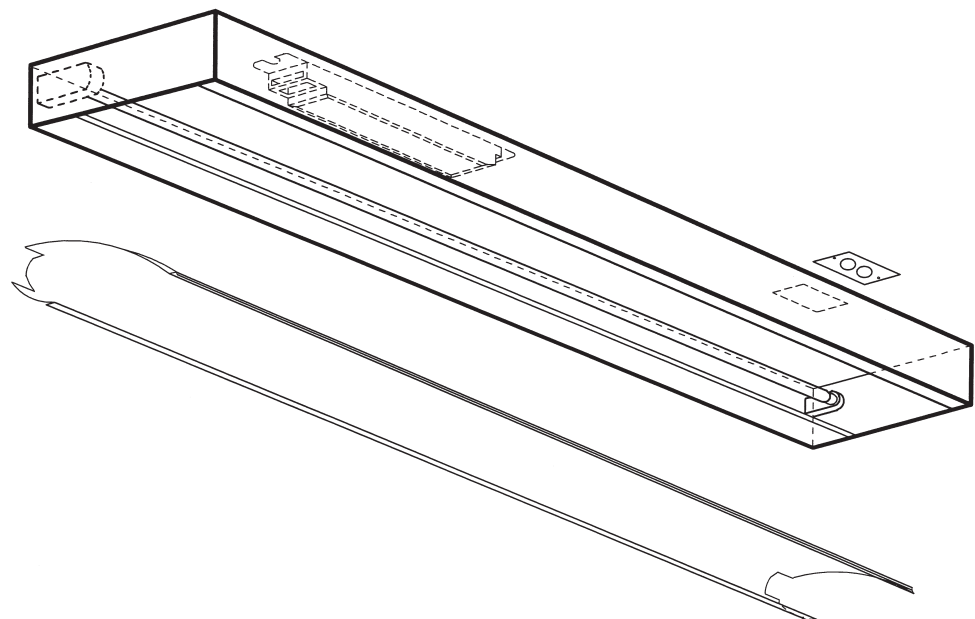





MPS SERIES

SURFACE Mount T-5 Wall Washer



*Ideal placement is
24" to 36" from the
front edge of fixture
to the surface you
are lighting.*



TYPE:
CATALOG #:
JOB:

MPS SERIES

SURFACE Mount T-5 Wall Washer

SYSTEM

Surface mount miniature profile wall wash fixture using compact T-5 fluorescent linear lamps. The formed one piece aluminum reflector provides even unscaloped illumination with no glare and offers exceptional lamp shielding. UL/CUL Damp Location listed.

U.S. Patent #5,142,459


SPECIFICATIONS

Small, surface mount linear wall wash fixture using one or two compact T-5 fluorescent linear lamps. The one lamp fixture is 2-1/2" deep with ballast(s) mounted in the housing. The one piece, formed reflector is high purity aluminum (99.9%) with 95% reflectance. It is easily removable without tools for access to the ballast and wiring. Reflector design provides complete lamp shielding even when viewed directly beneath the fixture.

TGIC polyester powder coated housing is made of 22 gauge CRS with cover and knock-outs that provide quick wire access to the back of fixture for through wiring.


OPTIONS

Ballast	120 Electronic (Standard) 277 Electronic Dimming (Some models) -DM Emergency (Some models) -EPP
Finish	White (Standard) Custom -Custom
Reflectors	Diffuse Silver (Standard) Specular Silver -SP Painted White -P
Lens	Mini Lens -ML
Louver	Parallel Blade Louver -LV
Mounting	Surface J-Box (Standard) Canopy w/Stem -CS (FT of Stem) Ex. 154T-5WW-MPS-CS4

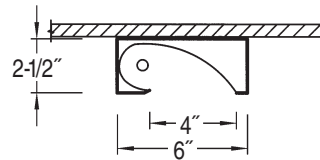

Single Lamp Fixtures

Section

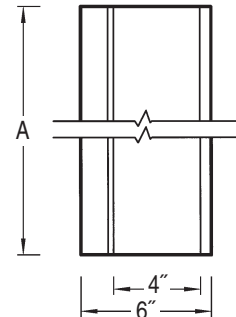


Front View

Model No.	A	Lamp
114 T-5WW-MPS*	22-1/2"	14 watt T-5
214 T-5WW-MPS*†	22-1/2"	(2) 14 watt T-5
124 T-5WW-MPS*	22-1/2"	24 watt T-5 HO
224 T-5WW-MPS*†	22-1/2"	(2) 24 watt T-5 HO
121 T-5WW-MPS*	34-5/16"	21 watt T-5
221 T-5WW-MPS*†	34-5/16"	(2) 21 watt T-5
139 T-5WW-MPS*	34-5/16"	39 watt T-5 HO
239 T-5WW-MPS*†	34-5/16"	(2) 39 watt T-5 HO
128 T-5WW-MPS*	46-1/8"	28 watt T-5
228 T-5WW-MPS*†	46-1/8"	(2) 28 watt T-5
154 T-5WW-MPS*	46-1/8"	54 watt T-5 HO
254 T-5WW-MPS*†	46-1/8"	(2) 54 watt T-5 HO

* Magnetic ballast not available.

† Double lamp fixtures.

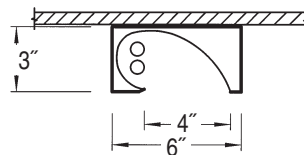

Double Lamp Fixtures

Section