


ENGINEERED
LIGHTING PRODUCTS



SC SERIES

*SURFACE/PENDENT Mount Wall Wash
and Down Lights*



Down Light

*Shallow surface or
pendent mount Wall
Wash and Down
Light with soft
curved edges.*



TYPE:
CATALOG #:
JOB:

SC SERIES

*SURFACE/PENDENT Mount Wall Wash
and Down Lights*

SYSTEM

Shallow surface or pendent mounted wall wash and down light fixtures. Wall wash fixtures have a formed aluminum reflector that provides uniform illumination without scallops. Down lights have a parallel blade louver to provide lamp shielding. UL/CUL Damp Location listed.





SPECIFICATIONS

Shallow surface or pendent mounted wall wash and down light fixture for use with Biax, T-8 and T-5 linear lamps. Down lights are available for single and double lamp units and are provided with a parallel blade louver. The wall wash reflector is diffuse, high purity aluminum (99.9%) which provide 95% reflectance. It is a formed one piece unit that is easily removable without tools for access to the ballast and wiring. The down light reflector is painted white with TGIC polyester powder coating. The curved extruded aluminum side panels provide a pleasant change from standard rectangular fixtures.

TGIC polyester powder coated housing is made of 20 gauge CRS back plate and extruded aluminum curved side panels. Cover and knock-outs provide quick wire access to the back of the fixture for through wiring.

OPTIONS

Ballast	120 Electronic (Standard)
	277 Electronic
	Dimming (Some Models) -DM Emergency (Some Models) -EPP
Finish	White (Standard)
	Custom -Custom
Louver	Parallel Blade Louver -LV (Standard for Down Light)
Mounting	Surface J-Box (Standard)
	Canopy w/Stem -CS (FT of Stem) Ex. 154T-5WW-SC-CS4

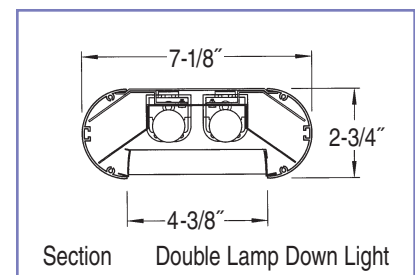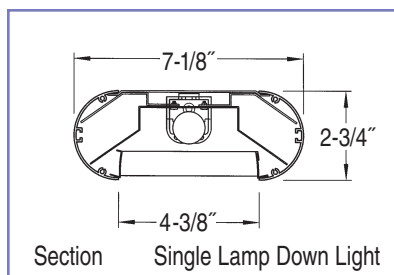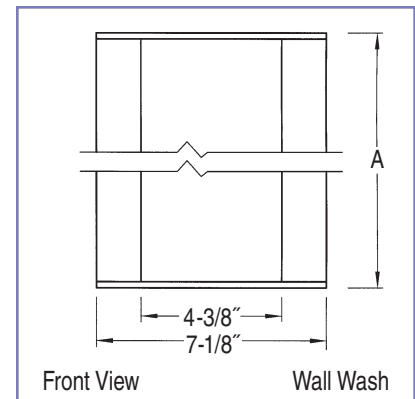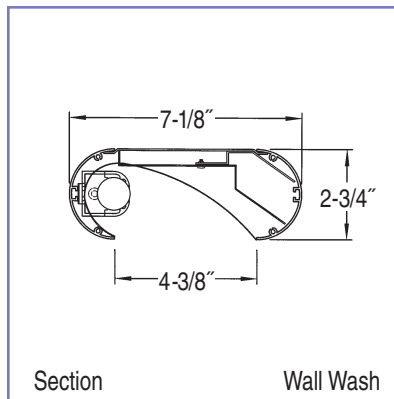

Model No.*	A	Lamp
139 BX (WW or DL) -SC	18-1/4"	39 watt Biax
140 BX (WW or DL) -SC	24-1/4"	40 watt Biax
150 BX (WW or DL) -SC	24-1/4"	50 watt Biax
155 BX (WW or DL) -SC	24-1/4"	55 watt Biax
239 BX (WW or DL) -SC	36-1/4"	(2) 39 watt Biax
240 BX (WW or DL) -SC	48-1/4"	(2) 40 watt Biax
250 BX (WW or DL) -SC	48-1/4"	(2) 50 watt Biax
255 BX (WW or DL) -SC	48-1/4"	(2) 55 watt Biax
114 T-5 (WW or DL) -SC	24-1/4"	14 watt T-5
214 T-5 DL -SC	24-1/4"	(2) 14 watt T-5
124 T-5 (WW or DL) -SC	24-1/4"	24 watt T-5 HO
224 T-5 DL -SC	24-1/4"	(2) 24 watt T-5 HO
121 T-5 (WW or DL) -SC	36-1/4"	21 watt T-5
221 T-5 DL -SC	36-1/4"	(2) 21 watt T-5
139 T-5 (WW or DL) -SC	36-1/4"	39 watt T-5 HO
239 T-5 DL -SC	36-1/4"	(2) 39 watt T-5 HO
128 T-5 (WW or DL) -SC	48-1/4"	28 watt T-5
228 T-5 DL -SC	48-1/4"	(2) 28 watt T-5
154 T-5 (WW or DL) -SC	48-1/4"	54 watt T-5 HO
254 T-5 DL -SC	48-1/4"	(2) 54 watt T-5 HO
117 T-8 (WW or DL) -SC	24-1/4"	17 watt T-8
217 T-8 DL -SC	24-1/4"	(2) 17 watt T-8
125 T-8 (WW or DL) -SC	36-1/4"	25 watt T-8
225 T-8 DL -SC	36-1/4"	(2) 25 watt T-8
132 T-8 (WW or DL) -SC	48-1/4"	32 watt T-8
232 T-8 DL -SC	48-1/4"	(2) 32 watt T-8

* WW for Wall Wash and DL for Down Light